

GENERAL DESCRIPTION


The 74AHCT86 is a quad 2-input exclusive-OR gate with advanced silicone-gate CMOS technology. The supply voltage of this device accepts any voltage in a range of 4.5V to 5.5V and all pins can be compatible with low power Schottky TTL. The device implements the Boolean function $Y = \bar{A}B + A\bar{B}$ in positive logic.

The 74AHCT86 is available in a Green SOIC-14 package. It operates over an ambient temperature range of -40°C to +125°C.

FEATURES

- **Wide Supply Voltage Range: 4.5V to 5.5V**
- **Inputs Accept Voltages Higher than the Supply Voltage**
- **+8mA/-8mA Output Current**
- **Direct Interface with TTL Levels**
- **Balanced Propagation Delays**
- **All Inputs with Schmitt-Trigger**
- **-40°C to +125°C Operating Temperature Range**
- **Available in a Green SOIC-14 Package**

LOGIC DIAGRAM

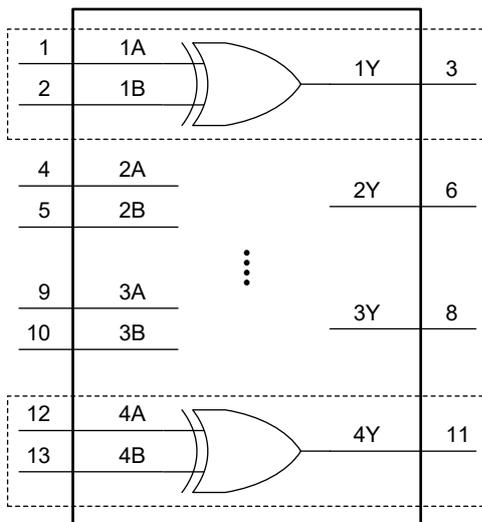

FUNCTION TABLE


INPUT		OUTPUT
nA	nB	nY
L	L	L
L	H	H
H	L	H
H	H	L

$$Y = \bar{A}B + A\bar{B}$$

H = High Voltage Level

L = Low Voltage Level

PIN CONFIGURATION

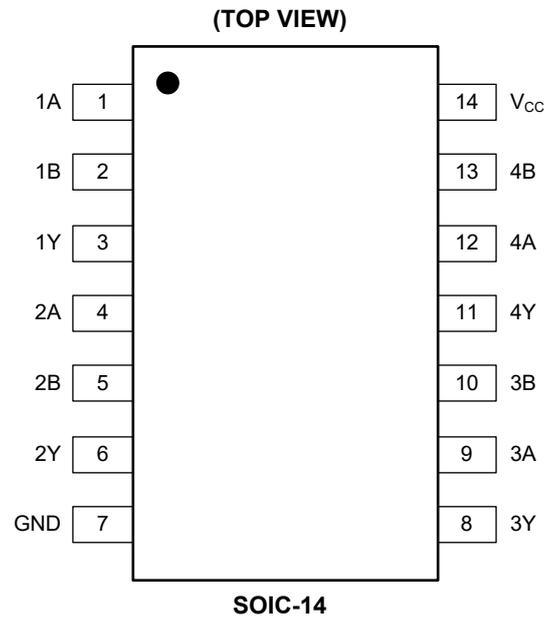

PIN DESCRIPTION

PIN	NAME	FUNCTION
1, 4, 9, 12	1A, 2A, 3A, 4A	Data Inputs.
2, 5, 10, 13	1B, 2B, 3B, 4B	Data Inputs.
3, 6, 8, 11	1Y, 2Y, 3Y, 4Y	Data Outputs.
7	GND	Ground.
14	V _{CC}	Supply Voltage.

ELECTRICAL CHARACTERISTICS(Full = -40°C to +125°C, all typical values are measured at $V_{CC} = 5.0V$ and $T_A = +25^\circ C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
High-Level Input Voltage	V_{IH}	$V_{CC} = 4.5V$ to $5.5V$	Full	2			V
Low-Level Input Voltage	V_{IL}	$V_{CC} = 4.5V$ to $5.5V$	Full			0.8	V
High-Level Output Voltage	V_{OH}	$V_{CC} = 4.5V, I_O = -50\mu A$	Full	4.45	4.495		V
		$V_{CC} = 4.5V, I_O = -8mA$	Full	4	4.25		
Low-Level Output Voltage	V_{OL}	$V_{CC} = 4.5V, I_O = 50\mu A$	Full		0.005	0.05	V
		$V_{CC} = 4.5V, I_O = 8mA$	Full		0.25	0.5	
Input Leakage Current	I_I	$V_{CC} = 0V$ to $5.5V, V_I = 5.5V$ or GND	Full		0.02	2	μA
Supply Current	I_{CC}	$V_{CC} = 5.5V, V_I = V_{CC}$ or GND, $I_O = 0A$	Full		0.02	10	μA
Additional Supply Current	ΔI_{CC}	Per input pin, $V_I = V_{CC} - 2.1V, I_O = 0A$, other pins at V_{CC} or GND, $V_{CC} = 4.5V$ to $5.5V$	Full		0.05	0.5	mA
Input Capacitance	C_I		+25°C		5		pF
Output Capacitance	C_O		+25°C		5		pF

DYNAMIC CHARACTERISTICS(See Figure 1 for test circuit. Full = -40°C to +125°C, all typical values are measured at $V_{CC} = 4.5V$ and $5.5V$ respectively, $T_A = +25^\circ C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN ⁽¹⁾	TYP	MAX ⁽¹⁾	UNITS	
Propagation Delay ⁽²⁾	t_{PD}	nA, nB to nY, see Figure 2	$V_{CC} = 4.5V$ to $5.5V, C_L = 15pF$	Full	0.3	6	9	ns
			$V_{CC} = 4.5V$ to $5.5V, C_L = 50pF$	Full	1	7	10	
Power Dissipation Capacitance ⁽³⁾	C_{PD}	$C_L = 50pF, f_i = 1MHz, V_I = GND$ to V_{CC}	+25°C		10		pF	

NOTES:

- Specified by design and characterization, not production tested.
- t_{PD} is the same as t_{PLH} and t_{PHL} .
- C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \sum(C_L \times V_{CC}^2 \times f_o)$$


where:

 f_i = Input frequency in MHz. f_o = Output frequency in MHz. C_L = Output load capacitance in pF. V_{CC} = Supply voltage in Volts.

N = Number of inputs switching.

 $\sum(C_L \times V_{CC}^2 \times f_o)$ = Sum of the outputs.

TEST CIRCUIT

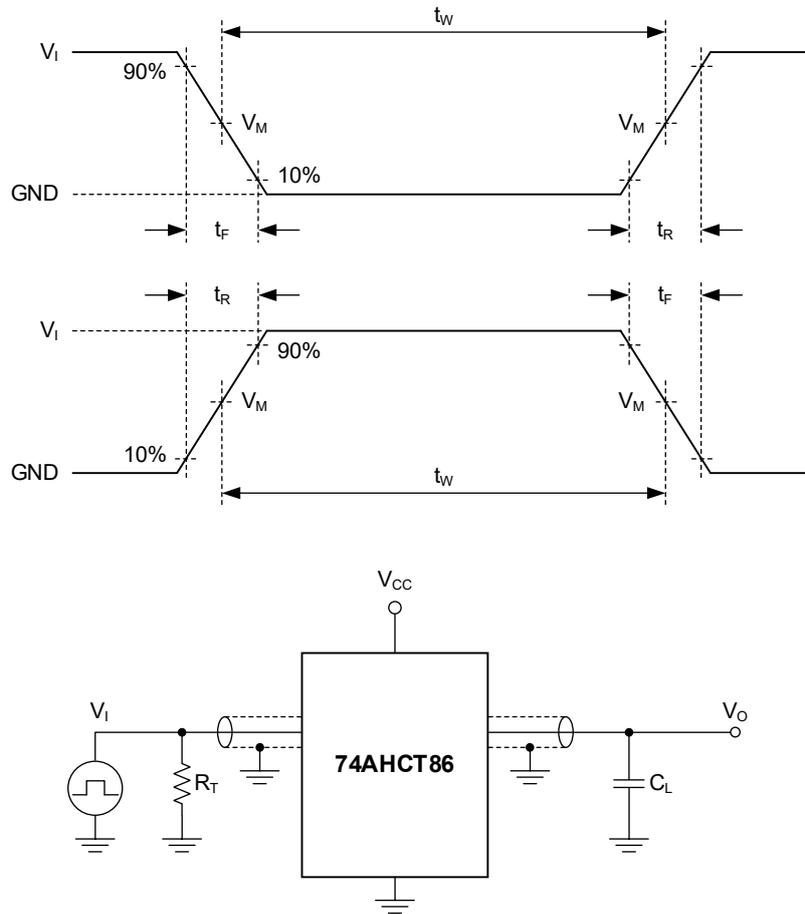

Test conditions are given in Table 1.

Definitions for test circuit:

C_L : Load capacitance (includes jig and probe).


R_T : Termination resistance (equals to output impedance Z_O of the pulse generator).

Figure 1. Test Circuit for Measuring Switching Times

Table 1. Test Conditions

SUPPLY VOLTAGE	INPUT		LOAD	TEST
	V_I	t_R, t_F	C_L	
V_{CC} 4.5V to 5.5V	3.0V	$\leq 3.0ns$	15pF, 50pF	t_{PHL}, t_{PLH}

WAVEFORMS

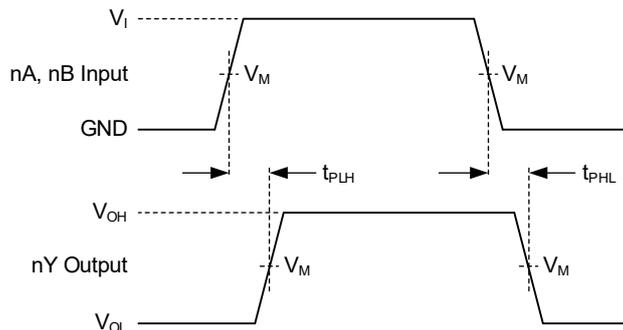

Test conditions are given in Table 1.

Measurement points are given in Table 2.

Logic levels: V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Figure 2. Input nA, nB to Output nY Propagation Delays

Table 2. Measurement Points

SUPPLY VOLTAGE	INPUT		OUTPUT
V_{CC}	V_I	$V_M^{(1)}$	V_M
4.5V to 5.5V	3.0V	1.5V	$0.5 \times V_{CC}$

NOTE:

1. The measurement points should be V_{IH} or V_{IL} when the input rising or falling time exceeds 3.0ns.

REVISION HISTORY


NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

JANUARY 2024 – REV.A to REV.A.1	Page
Updated Dynamic Characteristics section.....	4
Changes from Original (APRIL 2021) to REV.A	Page
Changed from product preview to production data.....	All


PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS

SOIC-14

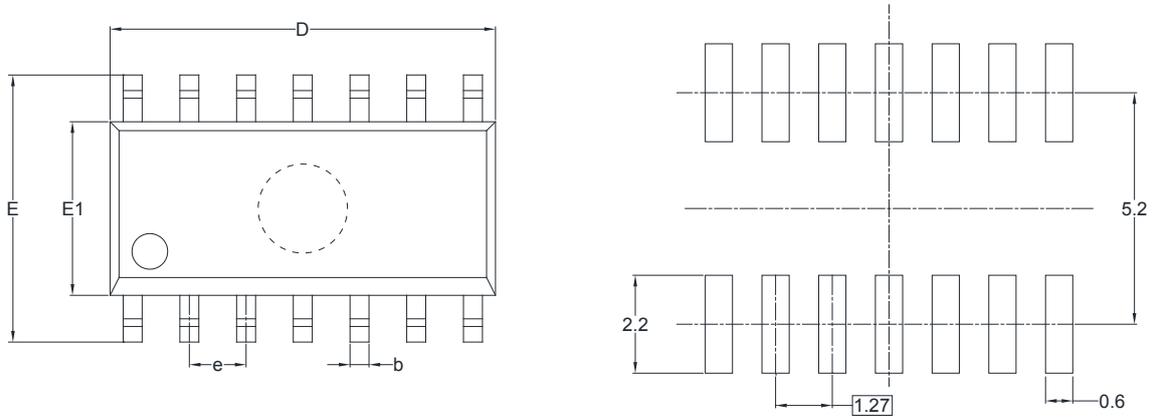

RECOMMENDED LAND PATTERN (Unit: mm)

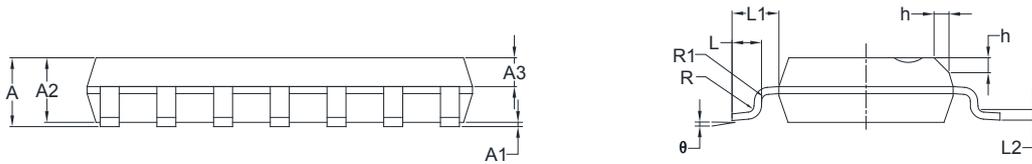


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.35	1.75	0.053	0.069
A1	0.10	0.25	0.004	0.010
A2	1.25	1.65	0.049	0.065
A3	0.55	0.75	0.022	0.030
b	0.36	0.49	0.014	0.019
D	8.53	8.73	0.336	0.344
E	5.80	6.20	0.228	0.244
E1	3.80	4.00	0.150	0.157
e	1.27 BSC		0.050 BSC	
L	0.45	0.80	0.018	0.032
L1	1.04 REF		0.040 REF	
L2	0.25 BSC		0.01 BSC	
R	0.07		0.003	
R1	0.07		0.003	
h	0.30	0.50	0.012	0.020
θ	0°	8°	0°	8°


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

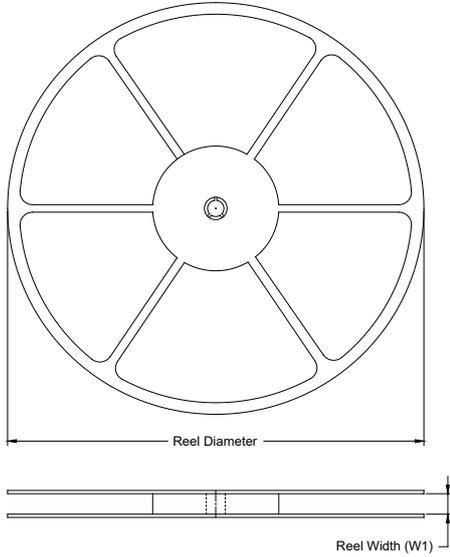

TAPE DIMENSIONS

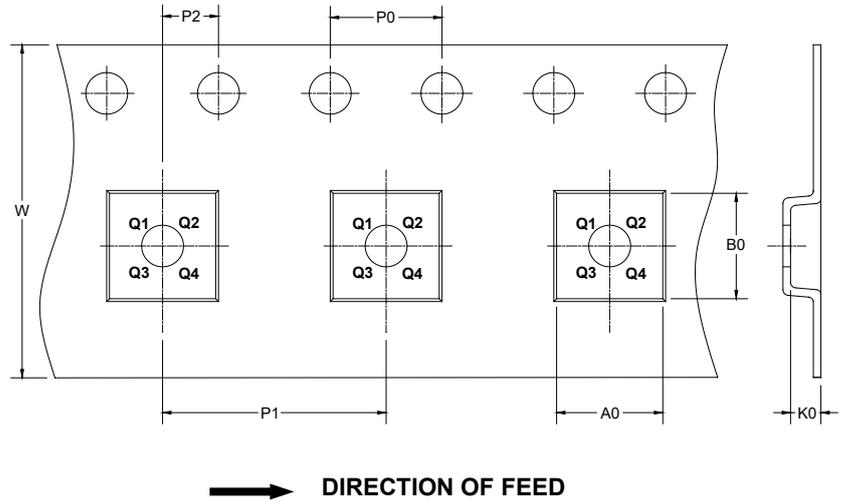

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOIC-14	13"	16.4	6.60	9.30	2.10	4.0	8.0	2.0	16.0	Q1

000001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

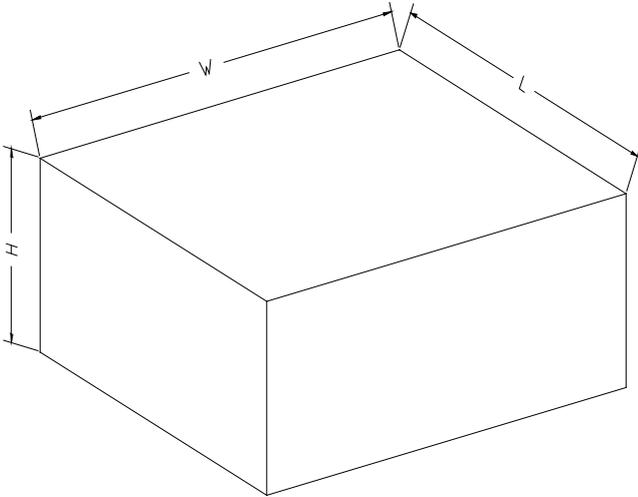

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

DD0002