

### GENERAL DESCRIPTION

The SGM2249 is a high voltage, low quiescent current and low dropout voltage linear regulator. It is capable of supplying 300mA output current with typical dropout voltage of 740mV. The operating input voltage range is from 2.5V to 40V and output voltage range is from 0.6V to 24V.

Other features include current limit and thermal shutdown protection. The SGM2249 is suitable for various applications.

The SGM2249 is available in a Green MSOP-8 (Exposed Pad) package. It operates over an operating temperature range of -40°C to +125°C.

### FEATURES

- Operating Input Voltage Range: 2.5V to 40V
- Enable Pin Accept Voltages Higher than the Supply Voltage and up to 40V
- Adjustable Output from 0.6V to 24V
- 300mA Output Current
- Output Voltage Accuracy:  $\pm 1\%$  at +25°C
- Low Quiescent Current: 3.2 $\mu$ A (TYP)
- Low Dropout Voltage:  
740mV (TYP) at 300mA,  $V_{OUT} = 24V$
- Current Limiting and Thermal Protection
- With Output Automatic Discharge
- Stable with Small Case Size Ceramic Capacitors
- -40°C to +125°C Operating Temperature Range
- Available in a Green MSOP-8 (Exposed Pad) Package

### APPLICATIONS

Industrial Equipment  
Battery-Powered Equipment  
Medical Equipment

### TYPICAL APPLICATION

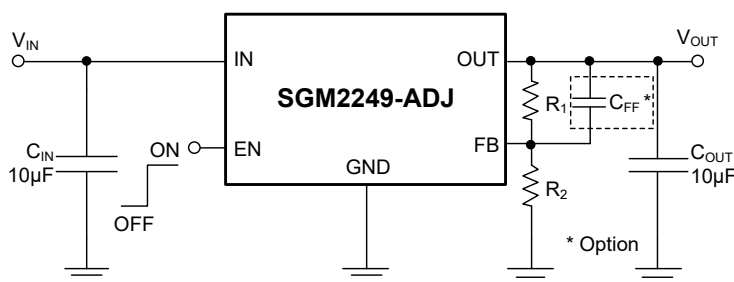


Figure 1. Typical Application Circuit

## PACKAGE/ORDERING INFORMATION


MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM2249-ADJ	MSOP-8 (Exposed Pad)	-40°C to +125°C	SGM2249-ADJXPMS8G/TR	SGM25L XPMS8 XXXXX	Tape and Reel, 4000

## MARKING INFORMATION

NOTE: XXXXX = Date Code, Trace Code and Vendor Code.

## MSOP-8 (Exposed Pad)

XXXXX



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

## ABSOLUTE MAXIMUM RATINGS

IN, EN to GND .....	-0.3V to 45V
OUT to GND .....	-0.3V to 45V
FB to GND .....	-0.3V to 45V
Package Thermal Resistance	
MSOP-8 (Exposed Pad), $\theta_{JA}$ .....	47.6°C/W
MSOP-8 (Exposed Pad), $\theta_{JB}$ .....	23.1°C/W
MSOP-8 (Exposed Pad), $\theta_{JC(TOP)}$ .....	54.8°C/W
MSOP-8 (Exposed Pad), $\theta_{JC(BOT)}$ .....	8.3°C/W
Junction Temperature .....	+150°C
Storage Temperature Range .....	-65°C to +150°C
Lead Temperature (Soldering, 10s) .....	+260°C
ESD Susceptibility <sup>(1) (2)</sup>	
HBM .....	±6000V
CDM .....	±1000V

## NOTES:

1. For human body model (HBM), all pins comply with ANSI/ESDA/JEDEC JS-001 specifications.
2. For charged device model (CDM), all pins comply with ANSI/ESDA/JEDEC JS-002 specifications.

## RECOMMENDED OPERATING CONDITIONS

Supply Voltage Range, $V_{IN}$ .....	2.5V to 40V
Enable Input Voltage Range .....	0V to 40V
Input Effective Capacitance, $C_{IN}$ .....	0.5μF (MIN)
Output Effective Capacitance, $C_{OUT}$ .....	1μF to 100μF
Operating Ambient Temperature Range .....	-40°C to +125°C
Operating Junction Temperature Range .....	-40°C to +125°C

## OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


## ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

## DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

## PIN CONFIGURATION

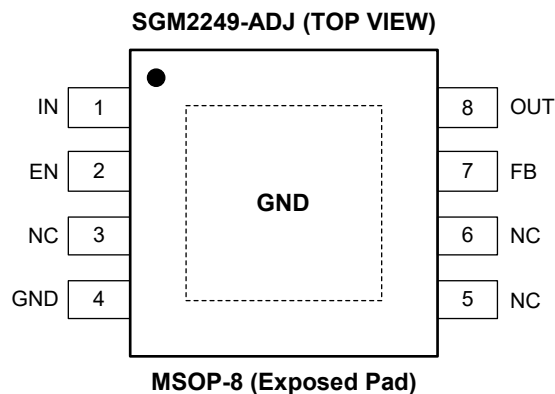

## PIN DESCRIPTION

PIN	NAME	FUNCTION
1	IN	Input Supply Voltage Pin. It is recommended to use a 1 $\mu$ F or larger ceramic capacitor from IN pin to ground to get good power supply decoupling. This ceramic capacitor should be placed as close as possible to IN pin.
2	EN	Enable Pin. Drive EN high to turn on the regulator. Drive EN low to turn off the regulator.
3, 5, 6	NC	No Connection.
4	GND	Ground.
7	FB	Feedback Voltage Input Pin. Connect this pin to the midpoint of an external resistor divider to adjust the output voltage. Place the resistors as close as possible to this pin.
8	OUT	Regulator Output Pin. It is recommended to use a ceramic capacitor with effective capacitance in the range of 1 $\mu$ F to 100 $\mu$ F to ensure stability. This ceramic capacitor should be placed as close as possible to OUT pin.
Exposed Pad	GND	Exposed Pad. Connect it to GND internally. Connect it to a large ground plane to maximize thermal performance. This pad is not an electrical connection point.

## FUNCTIONAL BLOCK DIAGRAM



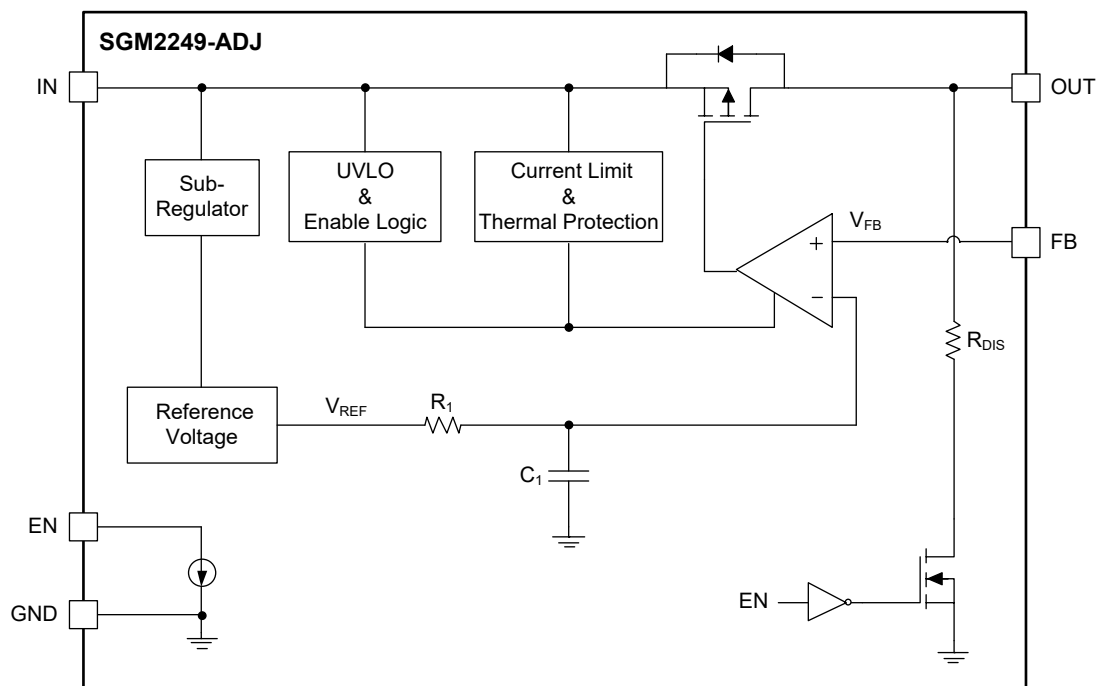




Figure 2. Block Diagram

## PACKAGE OUTLINE DIMENSIONS

### MSOP-8 (Exposed Pad)

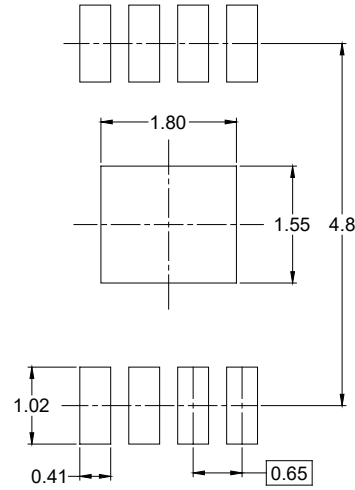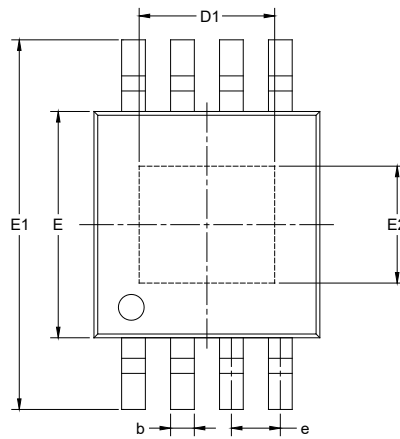

RECOMMENDED LAND PATTERN (Unit: mm)

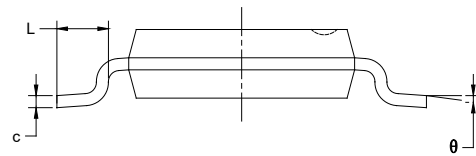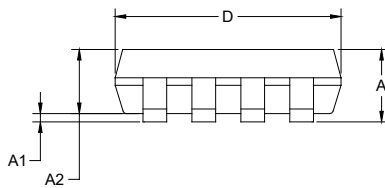


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.250	0.380	0.010	0.015
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
D1	1.700	1.900	0.067	0.075
e	0.65 BSC		0.026 BSC	
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
E2	1.450	1.650	0.057	0.065
L	0.400	0.800	0.016	0.031
$\theta$	0°	6°	0°	6°

#### NOTES:


1. Body dimensions do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS

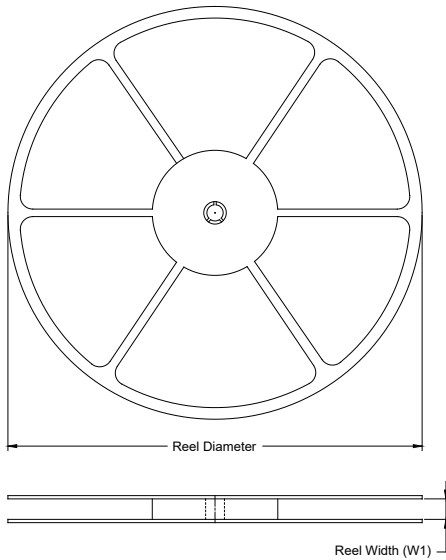

### TAPE DIMENSIONS

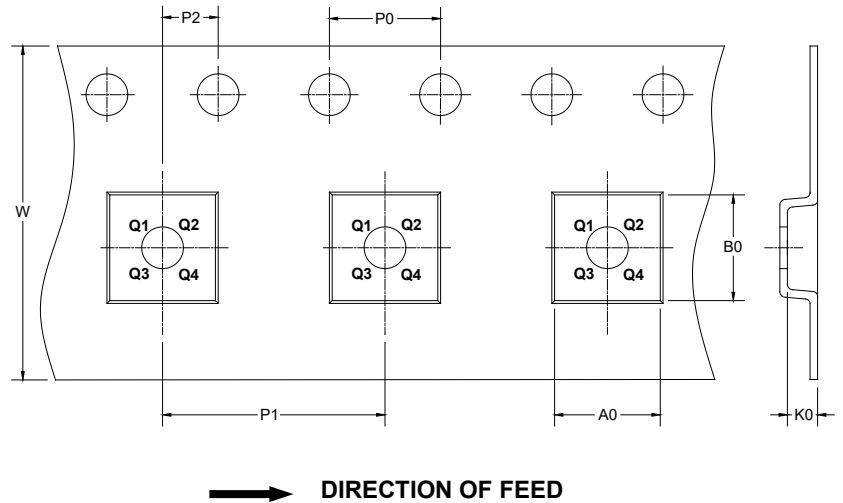

NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
MSOP-8 (Exposed Pad)	13"	12.4	5.20	3.30	1.50	4.0	8.0	2.0	12.0	Q1

DD00001

## PACKAGE INFORMATION

### CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

DD0002