



SGM48754

Quad SPST CMOS Analog Switch

GENERAL DESCRIPTION

The SGM48754 is a quad SPST (single-pole/single-throw), CMOS analog switch. It operates from 2.5V to 5.5V single power supply and all digital inputs support 1.8V logic control.

Other features include low voltage, low on-resistance and low off-leakage current. The high performances make it very suitable for multiple applications, such as cellular phones, audio and video signal routing, etc.

The SGM48754 is available in Green SOIC-14 and TSSOP-14 packages. It operates over an ambient temperature range of -40°C to +85°C.

FEATURES

- Single Supply Voltage Range: 2.5V to 5.5V
- On-Resistance: 24Ω (TYP) with 5V Supply
- “T” Type Switch
- 1.8V Logic Compatible
- Low On-Resistance Flatness
- High Off-Isolation: -80dB ($R_L = 50\Omega$, $f = 1\text{MHz}$)
- Low Off-Leakage Current: 1nA (TYP) at +25°C
- Low On-Leakage Current: 1nA (TYP) at +25°C
- Low Distortion: 0.35% ($R_L = 600\Omega$, $f = 20\text{Hz}$ to 20kHz)
- -40°C to +85°C Operating Temperature Range
- Available in Green SOIC-14 and TSSOP-14 Packages

APPLICATIONS

Automotive
Portable Equipment
Sample-and-Hold Circuits
Data-Acquisition Systems
Battery-Powered Systems
Audio and Video Signal Routing


PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM48754	SOIC-14	-40°C to +85°C	SGM48754YS14G/TR	SGM48754YS14 XXXXX	Tape and Reel, 2500
	TSSOP-14	-40°C to +85°C	SGM48754YTS14G/TR	SGM48754 YTS14 XXXXX	Tape and Reel, 4000

MARKING INFORMATION

NOTE: XXXXX = Date Code and Vendor Code.

SOIC-14/TSSOP-14

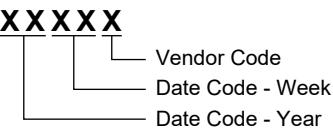

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

V _{CC} to GND	-0.3V to 6V
Voltage into Any Terminal ⁽¹⁾	-0.3V to (V _{CC} + 0.3V)
Continuous Current into Any Terminal	±20mA
Peak Current (Pulsed at 1ms, 10% duty cycle)	±40mA
Junction Temperature	+150°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10s)	+260°C
ESD Susceptibility	
HBM	4000V
MM	300V

NOTE:

- Internal diodes will clamp the voltage on any signal that is lower than GND. Limit the current through the forward diode to the maximum ratings.

RECOMMENDED OPERATING CONDITIONS

Supply Voltage Range	2.5V to 5.5V
Operating Temperature Range	-40°C to +85°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATIONS

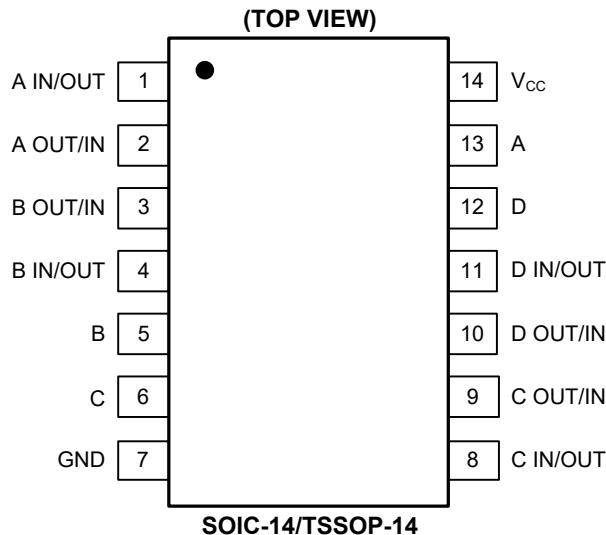

PIN DESCRIPTION

PIN	NAME	FUNCTION
1	A IN/OUT	Switch A Input/Output Pin.
2	A OUT/IN	Switch A Input/Output Pin.
3	B OUT/IN	Switch B Input/Output Pin.
4	B IN/OUT	Switch B Input/Output Pin.
5	B	Switch B Control Pin.
6	C	Switch C Control Pin.
7	GND	Ground.
8	C IN/OUT	Switch C Input/Output Pin.
9	C OUT/IN	Switch C Input/Output Pin.
10	D OUT/IN	Switch D Input/Output Pin.
11	D IN/OUT	Switch D Input/Output Pin.
12	D	Switch D Control Pin.
13	A	Switch A Control Pin.
14	V _{cc}	Positive Analog and Digital Supply Voltage Input Pin.

FUNCTION TABLE

SELECT INPUTS A/B/C/D	SWITCH STATUS
	All Switches Close
High	All Switches Open
Low	

NOTE:

Any input terminal can be used as an output terminal, and any output terminal can also be used as an input terminal. Signal transmission in both directions is equally well.

ELECTRICAL CHARACTERISTICS

($V_{CC} = 5.0V$, Full = $-40^{\circ}C$ to $+85^{\circ}C$, $x = A, B, C$ and D switch in/out or out/in, typical values are at $T_A = +25^{\circ}C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
Analog Switch							
Analog Signal Range	$V_{X_}, V_X$		Full	GND		V_{CC}	V
On-Resistance	R_{ON}	$V_{CC} = 5.0V, I_X = 1mA$	$+25^{\circ}C$		24	30	Ω
			Full			35	
On-Resistance Match between Channels	ΔR_{ON}	$V_{CC} = 5.0V, I_X = 1mA$	$+25^{\circ}C$		1	2.6	Ω
			Full			3	
On-Resistance Flatness	$R_{FLAT(ON)}$	$V_{CC} = 5.0V, I_X = 1mA$	$+25^{\circ}C$		8	11	Ω
			Full			14	
X Off Leakage Current	$I_{X(OFF)}$	$V_{CC} = 5.0V, V_{X_} = 4.5V \text{ or } 0V, V_X = 4.5V \text{ or } 0V$	$+25^{\circ}C$		1	1000	nA
X Off Leakage Current	$I_{X(OFF)}$	$V_{CC} = 5.0V, V_{X_} = 4.5V \text{ or } 0V, V_X = 4.5V \text{ or } 0V$	$+25^{\circ}C$		1	1000	nA
X On Leakage Current	$I_{X(ON)}$	$V_{CC} = 5.0V, V_X = 4.5V \text{ or } 0V$	$+25^{\circ}C$		1	1000	nA
Digital I/O							
Logic Input Logic Threshold High	$V_{AH}, V_{BH}, V_{CH}, V_{DH}$		$+25^{\circ}C$	1.7			V
Logic Input Logic Threshold Low	$V_{AL}, V_{BL}, V_{CL}, V_{DL}$		$+25^{\circ}C$			0.5	V
Input-Current High	$I_{AH}, I_{BH}, I_{CH}, I_{DH}$	$V_A, V_B, V_C, V_D = V_{CC}$	$+25^{\circ}C$		1		nA
Input-Current Low	$I_{AL}, I_{BL}, I_{CL}, I_{DL}$	$V_A, V_B, V_C, V_D = 0V$	$+25^{\circ}C$		1		nA
Dynamic Characteristics							
Turn-On Time	t_{ON}	$V_{X_}, V_{Y_} = 3V, R_L = 300\Omega, C_L = 35pF, \text{ Test Circuit 1}$	$+25^{\circ}C$		40		ns
Turn-Off Time	t_{OFF}	$V_{X_}, V_{Y_} = 3V, R_L = 300\Omega, C_L = 35pF, \text{ Test Circuit 1}$	$+25^{\circ}C$		100		ns
Input Transition Rise or Fall Rate	$\Delta t/\Delta V$		$+25^{\circ}C$			20	ns/V
Charge Injection	Q	$R_S = 0\Omega, C = 1nF, V_S = 0V, \text{ Test Circuit 2}$	$+25^{\circ}C$		7		pC
Input Off-Capacitance	$C_{X(OFF)}$	$V_{X_} = 0V, f = 1MHz, \text{ Test Circuit 3}$	$+25^{\circ}C$		9		pF
Output Off-Capacitance	$C_{X(OFF)}$	$V_{X_} = 0V, f = 1MHz, \text{ Test Circuit 3}$	$+25^{\circ}C$		9		pF
Output On-Capacitance	$C_{X(ON)}$	$V_{X_} = 0V, f = 1MHz, \text{ Test Circuit 3}$	$+25^{\circ}C$		18		pF
Off-Isolation	O_{ISO}	$R_L = 50\Omega, f = 1MHz, \text{ Test Circuit 4}$	$+25^{\circ}C$		-80		dB
Channel-to-Channel Crosstalk	X_{TALK}	$f = 1MHz, \text{ Test Circuit 4}$	$+25^{\circ}C$		-95		dB
-3dB Bandwidth	BW	$R_L = 50\Omega$	$+25^{\circ}C$		180		MHz
Total Harmonic Distortion	THD	$R_L = 600\Omega, 5V_{P-P}, f = 20Hz \text{ to } 20kHz$	$+25^{\circ}C$		0.35		%
Power Supply							
Power Supply Range	V_{CC}		Full	2.5		5.5	V
Power Supply Current	I_{CC}	$V_A, V_B, V_C, V_D = V_{CC} \text{ or } 0$	$+25^{\circ}C$		0.001	6	μA



ELECTRICAL CHARACTERISTICS (continued)

($V_{CC} = 3.3V$, Full = $-40^{\circ}C$ to $+85^{\circ}C$, x = A, B, C and D switch in/out or out/in, typical values are at $T_A = +25^{\circ}C$, unless otherwise noted.)





PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
Analog Switch							
Analog Signal Range	$V_{X_}, V_X$		Full	GND		V_{CC}	V
On-Resistance	R_{ON}	$I_X = 1mA$	+25°C		40	55	Ω
			Full			58	
Off Leakage Current	$I_{X(OFF)}$	$V_{X_} = 1V, 3V, V_X = 3V, 1V$	+25°C		1	1000	nA
Off Leakage Current	$I_{X(OFF)}$	$V_{X_} = 1V, 3V, V_X = 3V, 1V$	+25°C		1	1000	nA
On Leakage Current	$I_{X(ON)}$	$V_X = 3V, 1V$	+25°C		1	1000	nA
Digital I/O							
Logic Input Logic Threshold High	$V_{AH}, V_{BH}, V_{CH}, V_{DH}$		+25°C	1.7			V
Logic Input Logic Threshold Low	$V_{AL}, V_{BL}, V_{CL}, V_{DL}$		+25°C			0.5	V
Input-Current High	$I_{AH}, I_{BH}, I_{CH}, I_{DH}$	$V_A, V_B, V_C, V_D = V_{CC}$	+25°C		1		nA
Input-Current Low	$I_{AL}, I_{BL}, I_{CL}, I_{DL}$	$V_A, V_B, V_C, V_D = 0V$	+25°C		1		nA
Dynamic Characteristics							
Turn-On Time	t_{ON}	$V_{X_}, V_{Y_} = 3V, R_L = 300\Omega, C_L = 35pF, Test Circuit 1$	+25°C		75		ns
Turn-Off Time	t_{OFF}	$V_{X_}, V_{Y_} = 3V, R_L = 300\Omega, C_L = 35pF, Test Circuit 1$	+25°C		125		ns
Input Transition Rise or Fall Rate	$\Delta t/\Delta V$		+25°C			100	ns/V
-3dB Bandwidth	BW	$R_L = 50\Omega$	+25°C		180		MHz
Charge Injection	Q	$R_S = 0\Omega, C = 1nF, V_S = 0V, Test Circuit 2$	+25°C		3.5		pC
Power Supply							
Power Supply Current	I_{CC}	$V_A, V_B, V_C, V_D = V_{CC} \text{ or } 0$	+25°C		0.001	3	μA

TYPICAL PERFORMANCE CHARACTERISTICS


V_{CC} = 5.0V, unless otherwise noted.

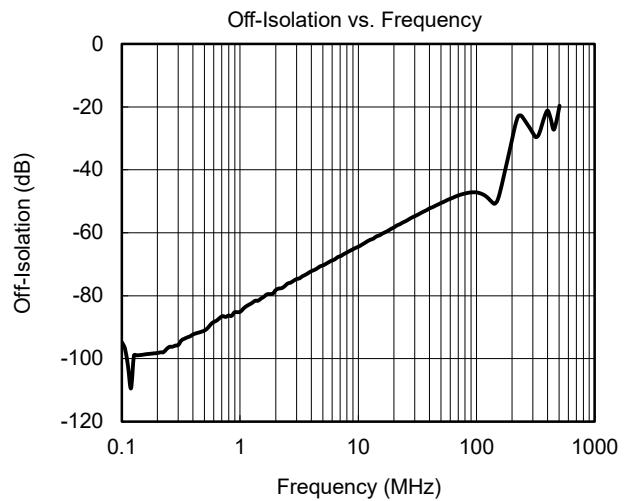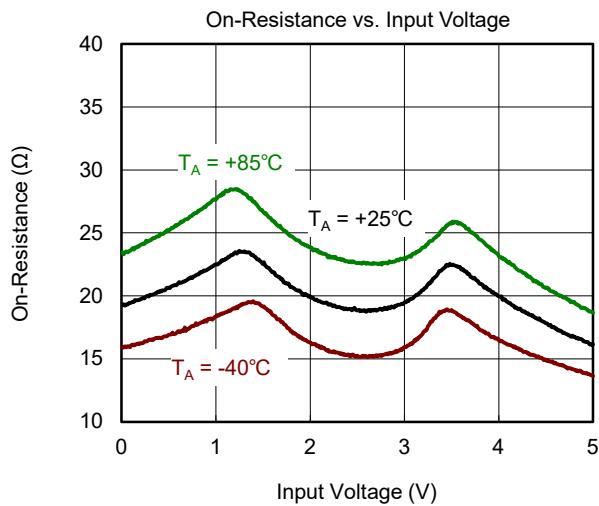


TEST CIRCUITS

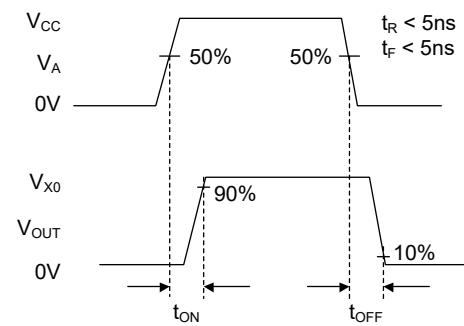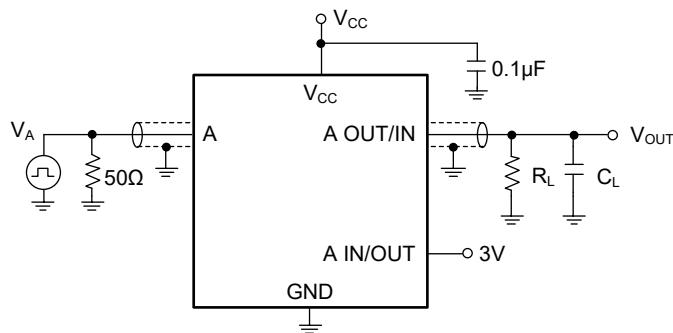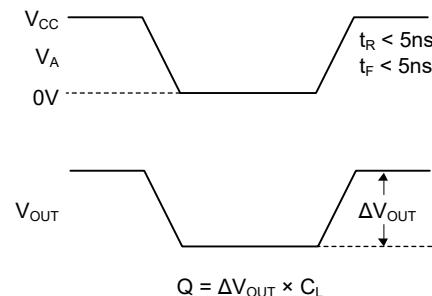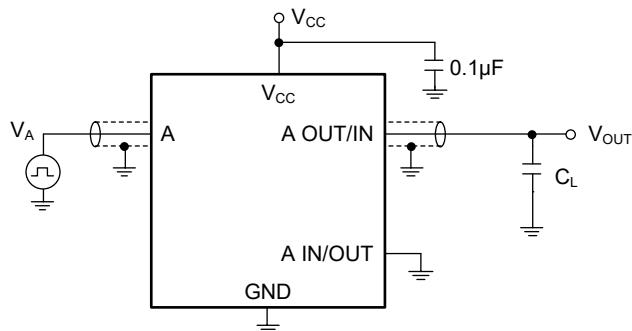Test Circuit 1. Switching Times (t_{ON} , t_{OFF})


Test Circuit 2. Charge Injection (Q)

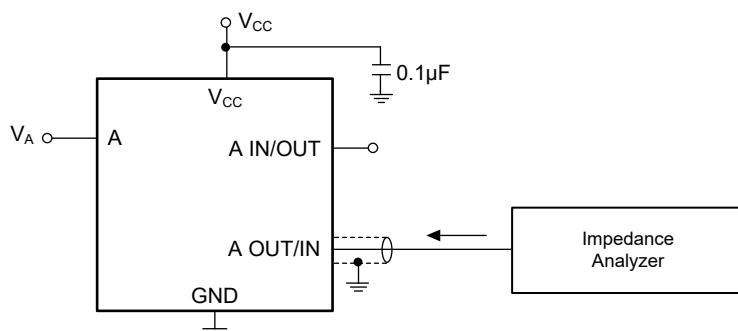


Test Circuit 3. Capacitance

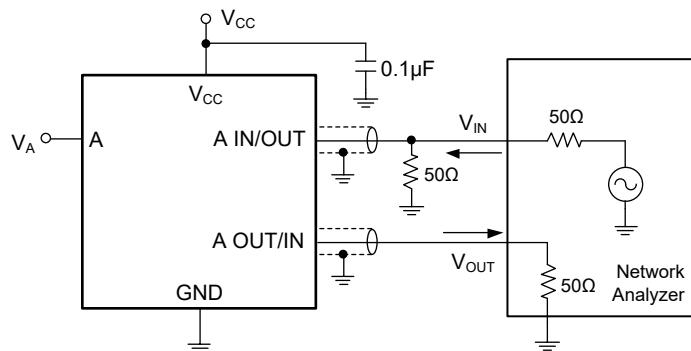TEST CIRCUITS (continued)

Off-Isolation = $20\log(V_{OUT}/V_{IN})$
Measured between A/B/C/D OUT/IN and "OFF" A/B/C/D IN/OUT Terminal on Each Switch.

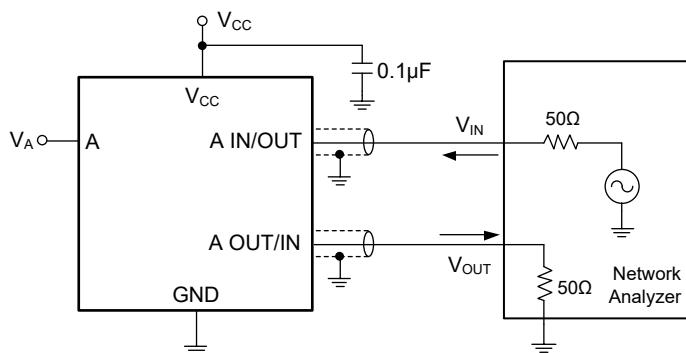Test Circuit 4. Off-Isolation

On Loss = $20\log(V_{OUT}/V_{IN})$
Measured between A/B/C/D OUT/IN and "ON" A/B/C/D IN/OUT Terminal on Each Switch.

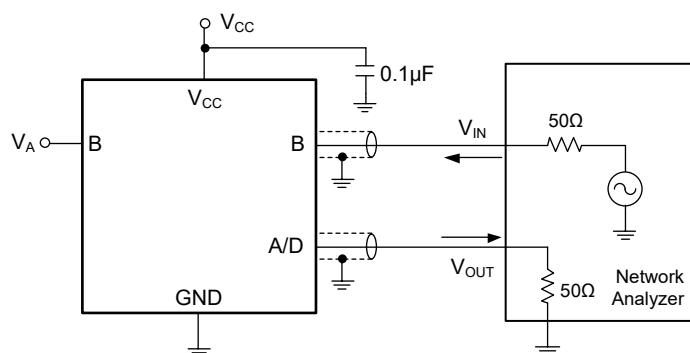Test Circuit 5. On Loss

Channel-to-Channel Crosstalk = $20\log(V_{OUT}/V_{IN})$
Measured from One Channel (A/B/C/D OUT/IN) to All other Channels.

Test Circuit 6. Channel-to-Channel Crosstalk

REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

SEPTEMBER 2023 – REV.A.1 to REV.A.2	Page
Updated Test Circuits section.....	7, 8

AUGUST 2022 – REV.A to REV.A.1	Page
Updated Test Circuits section.....	7



Changes from Original (MAY 2015) to REV.A

Changed from product preview to production data.....	All
--	-----



PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS

SOIC-14

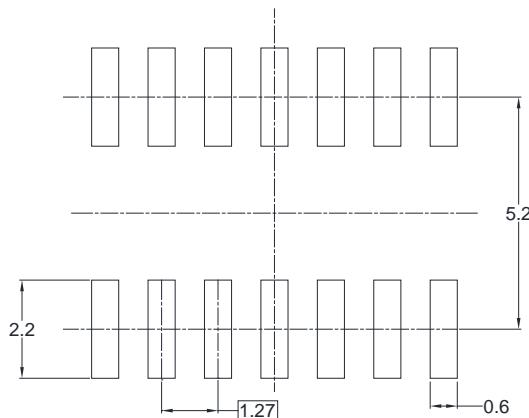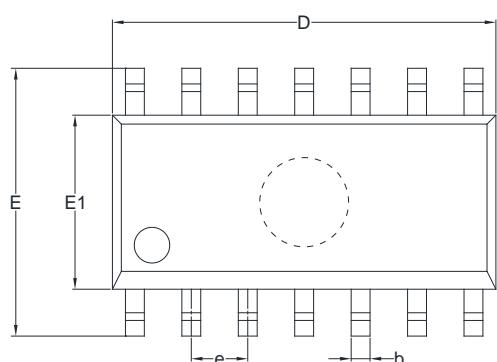

RECOMMENDED LAND PATTERN (Unit: mm)

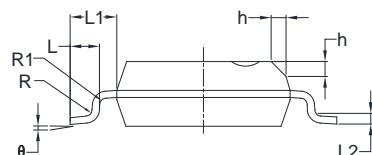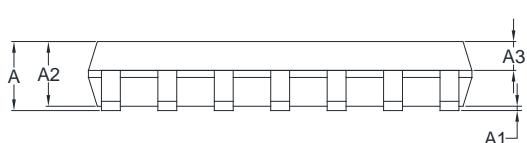

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.35	1.75	0.053	0.069
A1	0.10	0.25	0.004	0.010
A2	1.25	1.65	0.049	0.065
A3	0.55	0.75	0.022	0.030
b	0.36	0.49	0.014	0.019
D	8.53	8.73	0.336	0.344
E	5.80	6.20	0.228	0.244
E1	3.80	4.00	0.150	0.157
e	1.27 BSC		0.050 BSC	
L	0.45	0.80	0.018	0.032
L1	1.04 REF		0.040 REF	
L2	0.25 BSC		0.01 BSC	
R	0.07		0.003	
R1	0.07		0.003	
h	0.30	0.50	0.012	0.020
θ	0°	8°	0°	8°



NOTES:

1. Body dimensions do not include mode flash or protrusion.
2. This drawing is subject to change without notice.



PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS

TSSOP-14

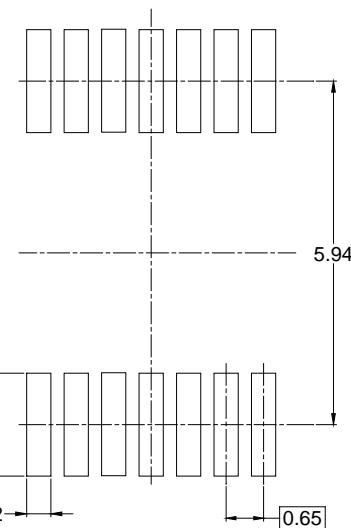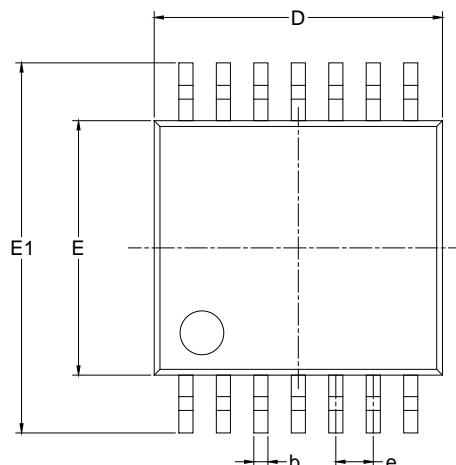

RECOMMENDED LAND PATTERN (Unit: mm)

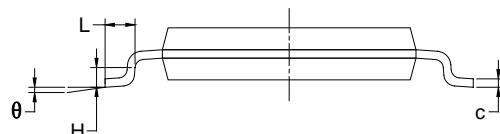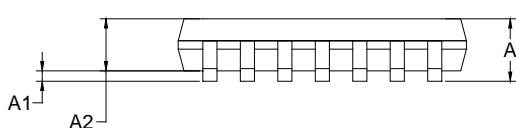

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A		1.200		0.047
A1	0.050	0.150	0.002	0.006
A2	0.800	1.050	0.031	0.041
b	0.190	0.300	0.007	0.012
c	0.090	0.200	0.004	0.008
D	4.860	5.100	0.191	0.201
E	4.300	4.500	0.169	0.177
E1	6.250	6.550	0.246	0.258
e	0.650 BSC		0.026 BSC	
L	0.500	0.700	0.02	0.028
H	0.25 TYP		0.01 TYP	
θ	1°	7°	1°	7°


NOTES:

1. Body dimensions do not include mode flash or protrusion.
2. This drawing is subject to change without notice.


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

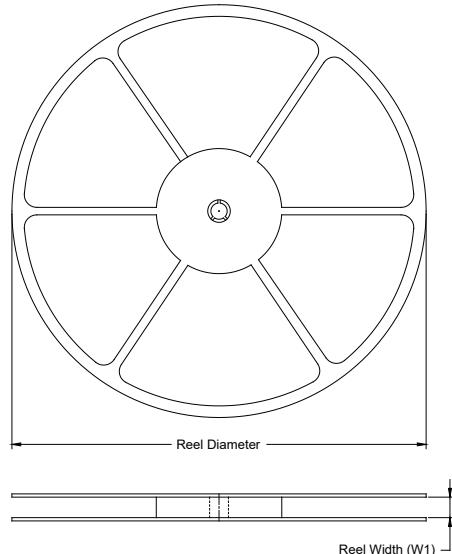

TAPE DIMENSIONS

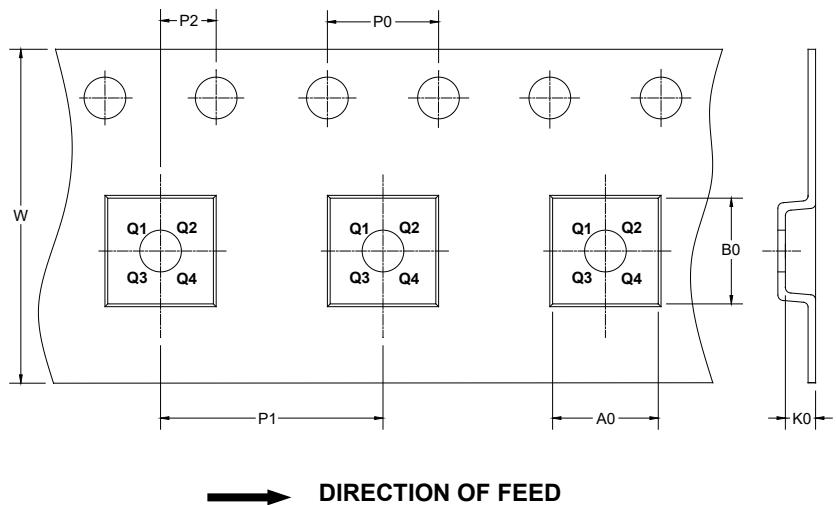

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOIC-14	13"	16.4	6.60	9.30	2.10	4.0	8.0	2.0	16.0	Q1
TSSOP-14	13"	12.4	6.95	5.60	1.50	4.0	8.0	2.0	12.0	Q1

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

00002