

GENERAL DESCRIPTION

The SGM4027A is a precision, low power, low noise and low dropout voltage reference, which is designed to offer low temperature drift and high initial accuracy, while consuming only 245μA (TYP) quiescent current.

The SGM4027A features high precision and low power consumption. The combination of these characteristics makes the device ideal for use in industrial applications, such as transmitters of temperature and pressure. To keep the stability and decrease the output noise of the output voltage, a capacitor with the capacitance of 2μF to 22μF should be added at the output pin of SGM4027A.

For the typical operation, the power supply voltage should be 0.2V beyond the V_{REF} . Due to the advantage of low dropout and low power dissipation, it is recommended to use SGM4027A in portable and battery-powered equipment.

The SGM4027A is available in a Green SOT-23 package. It is specified over the extended industrial temperature range of -40°C to +125°C.

FEATURES

- **Low Dropout Voltage: 0.2V (MAX)**
- **High Output Current: ±10mA (MAX)**
- **Limited Output Current: ±25mA (TYP)**
- **Stable Output C_{LOAD} Range: 2μF to 22μF**
- **High Initial Accuracy: ±0.1% (MAX)**
- **Low Temperature Drift:**
35ppm/°C (MAX) from -40°C to +125°C
- **Low Quiescent Current: 245μA (TYP)**
- **-40°C to +125°C Operating Temperature Range**
- **Available in a Green SOT-23 Package**

APPLICATIONS

Temperature and Pressure Transmitters
Handheld Test Equipment
Precision Data-Acquisition Systems
Portable Devices
Battery-Powered Equipment
Medical Instrumentation

TYPICAL APPLICATION

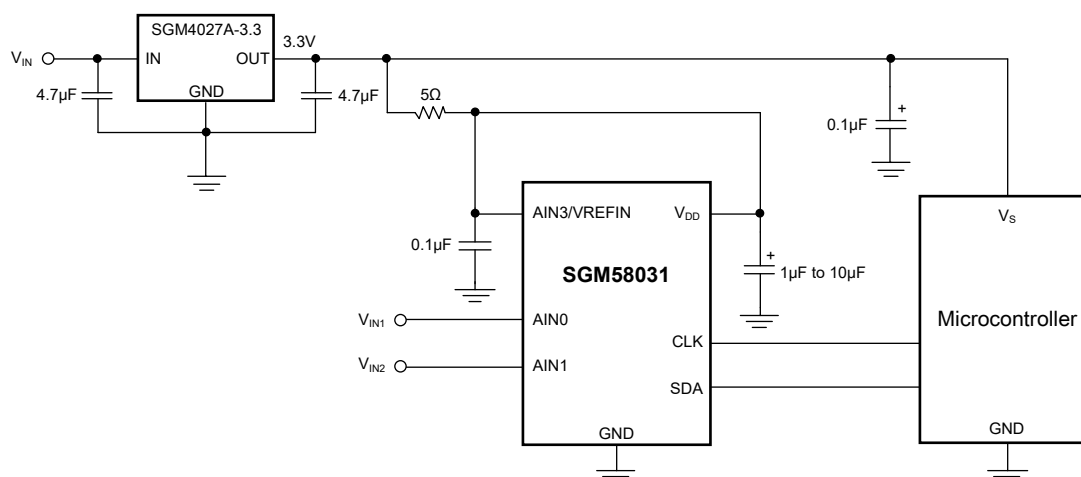


Figure 1. Typical Application Circuit

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM4027A-2.048	SOT-23	-40°C to +125°C	SGM4027A-2.048XN3LG/TR	0KYXX	Tape and Reel, 3000
SGM4027A-2.5	SOT-23	-40°C to +125°C	SGM4027A-2.5XN3LG/TR	0KXXX	Tape and Reel, 3000
SGM4027A-3.0	SOT-23	-40°C to +125°C	SGM4027A-3.0XN3LG/TR	0KZXX	Tape and Reel, 3000
SGM4027A-3.3	SOT-23	-40°C to +125°C	SGM4027A-3.3XN3LG/TR	0KWXX	Tape and Reel, 3000
SGM4027A-4.096	SOT-23	-40°C to +125°C	SGM4027A-4.096XN3LG/TR	0L0XX	Tape and Reel, 3000

MARKING INFORMATION

NOTE: XX = Date Code.

YYY X X
 └──┬──┬──
 └──┬──┬── Date Code - Week
 └──┬──┬── Date Code - Year
 └──┬──┬── Serial Number

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V_{IN} to GND 6V
 Output Short-Circuit Current Continuous
 Package Thermal Resistance
 SOT-23, θ_{JA} 183.5°C/W
 SOT-23, θ_{JB} 32.6°C/W
 Junction Temperature +150°C
 Storage Temperature Range -65°C to +150°C
 Lead Temperature (Soldering, 10s) +260°C
 ESD Susceptibility ^{(1) (2)}
 HBM ±8000V
 CDM ±1000V

NOTES:

1. For human body model (HBM), all pins comply with ANSI/ESDA/JEDEC JS-001 specifications.
2. For charged device model (CDM), all pins comply with ANSI/ESDA/JEDEC JS-002 specifications.

RECOMMENDED OPERATING CONDITIONS

Input Voltage, V_{IN} ($I_{OUT} = 0mA$)
 MAX($V_{REF} + 0.2V$, 3.0V) to 5.5V
 Load Current, I_{LOAD} ±10mA (MAX)
 Operating Temperature Range -40°C to +125°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

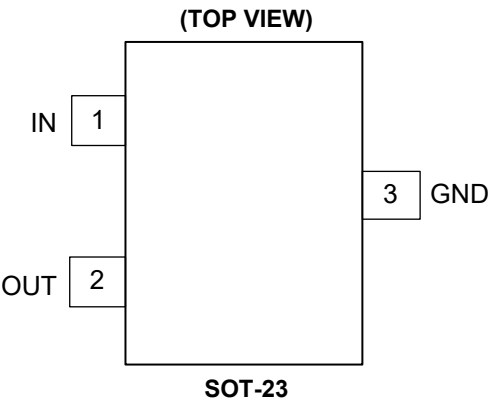
ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATION



PIN DESCRIPTION

PIN	NAME	I/O	FUNCTION
1	IN	I	Power Supply.
2	OUT	O	Reference Voltage Output.
3	GND	—	Ground.

ELECTRICAL CHARACTERISTICS(At $T_A = +25^\circ\text{C}$, $V_{IN} = 5\text{V}$, $I_{LOAD} = 0\text{mA}$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
SGM4027A-2.048						
Output Voltage	V_{OUT}			2.048		V
Initial Accuracy			-0.1		+0.1	%
Output Voltage Noise		$f = 0.1\text{Hz to }10\text{Hz}$		9.5		$\mu\text{V}_{PP}/\text{V}$
		$f = 10\text{Hz to }10\text{kHz}$		23		μV_{RMS}
Output Voltage Noise Density		$f = 1\text{kHz}$		220		$\text{nV}/\sqrt{\text{Hz}}$
Line Regulation		$3.0\text{V} \leq V_{IN} \leq 5.5\text{V}$		4.5		ppm/V
SGM4027A-2.5						
Output Voltage	V_{OUT}			2.5		V
Initial Accuracy			-0.1		+0.1	%
Output Voltage Noise		$f = 0.1\text{Hz to }10\text{Hz}$		9.5		$\mu\text{V}_{PP}/\text{V}$
		$f = 10\text{Hz to }10\text{kHz}$		27.5		μV_{RMS}
Output Voltage Noise Density		$f = 1\text{kHz}$		270		$\text{nV}/\sqrt{\text{Hz}}$
Line Regulation		$V_{REF} + 0.5\text{V} \leq V_{IN} \leq 5.5\text{V}$		5.0		ppm/V
SGM4027A-3.0						
Output Voltage	V_{OUT}			3.0		V
Initial Accuracy			-0.1		+0.1	%
Output Voltage Noise		$f = 0.1\text{Hz to }10\text{Hz}$		9.5		$\mu\text{V}_{PP}/\text{V}$
		$f = 10\text{Hz to }10\text{kHz}$		33		μV_{RMS}
Output Voltage Noise Density		$f = 1\text{kHz}$		330		$\text{nV}/\sqrt{\text{Hz}}$
Line Regulation ⁽¹⁾		$V_{REF} + 0.5\text{V} \leq V_{IN} \leq 5.5\text{V}$		7.0		ppm/V
SGM4027A-3.3						
Output Voltage	V_{OUT}			3.3		V
Initial Accuracy			-0.1		+0.1	%
Output Voltage Noise		$f = 0.1\text{Hz to }10\text{Hz}$		9.5		$\mu\text{V}_{PP}/\text{V}$
		$f = 10\text{Hz to }10\text{kHz}$		38		μV_{RMS}
Output Voltage Noise Density		$f = 1\text{kHz}$		360		$\text{nV}/\sqrt{\text{Hz}}$
Line Regulation ⁽¹⁾		$V_{REF} + 0.5\text{V} \leq V_{IN} \leq 5.5\text{V}$		7.0		ppm/V
SGM4027A-4.096						
Output Voltage	V_{OUT}			4.096		V
Initial Accuracy			-0.1		+0.1	%
Output Voltage Noise		$f = 0.1\text{Hz to }10\text{Hz}$		9.5		$\mu\text{V}_{PP}/\text{V}$
		$f = 10\text{Hz to }10\text{kHz}$		47.5		μV_{RMS}
Output Voltage Noise Density		$f = 1\text{kHz}$		470		$\text{nV}/\sqrt{\text{Hz}}$
Line Regulation ⁽¹⁾		$V_{REF} + 0.5\text{V} \leq V_{IN} \leq 5.5\text{V}$		15.0		ppm/V

NOTE:

1. For $V_{REF} > 2.5\text{V}$ version, SGM4027A can work at $V_{REF} + 0.3\text{V}$ supply voltage. On this supply condition, line regulation and PSRR may drop to about 20 ~ 30dB.

For $V_{REF} > 2.5\text{V}$ version, SGM4027A can also work at $V_{REF} + 0.2\text{V}$ supply voltage. On this supply condition, line regulation and PSRR may drop to about 30 ~ 40dB.







ELECTRICAL CHARACTERISTICS (continued)(At $T_A = +25^\circ\text{C}$, $V_{IN} = 5\text{V}$, $I_{LOAD} = 0\text{mA}$, unless otherwise noted.)







PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
SGM4027A						
Output Voltage Temperature Drift ⁽²⁾	dV_{OUT}/dT	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		10	35	ppm/°C
Long-Term Stability		0h to 1000h, $I_{OUT} = 0\text{mA}$		120		ppm
		1000h to 2000h, $I_{OUT} = 0\text{mA}$		20		
Load Regulation ⁽³⁾	$\Delta V_{O(\Delta I_L)}$	$-10\text{mA} < I_{LOAD} < 10\text{mA}$ ⁽⁴⁾		5	15	ppm/mA
Thermal Hysteresis	dT			150		ppm
Dropout Voltage	$V_{IN} - V_{OUT}$			5	200	mV
Short-Circuit Current	I_{SC}			±25		mA
Turn-On Settling Time		To 0.1% with $C_{LOAD} = 2.2\mu\text{F}$		800		μs
Power Supply						
Quiescent Current	I_Q			245	320	μA
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$			340	
Power Supply Range	V_{CC}		3		5.5	V

NOTES:

- The way to determine temperature drift is using Box Method.
- Load regulation is Kelvin sensed at the package.
- The minimum supply voltage for SGM4027A-2.048 and SGM4027A-2.5 is 3.0V.

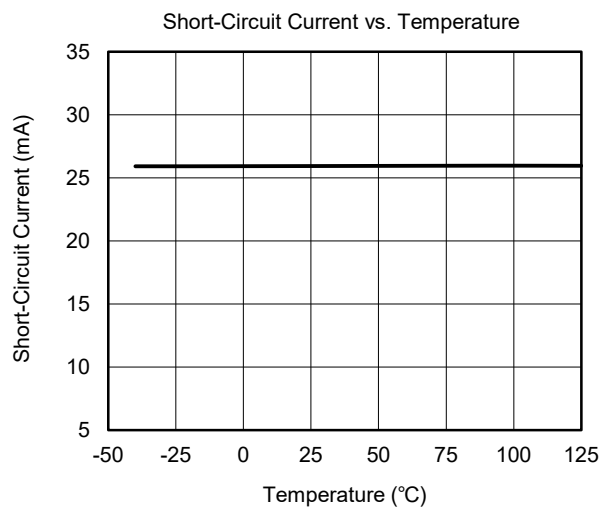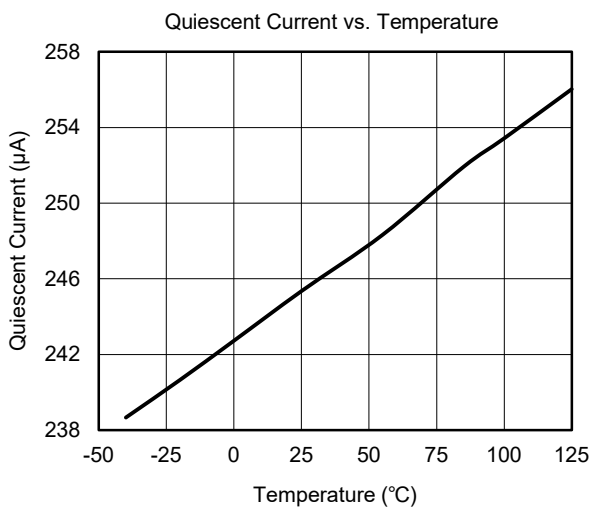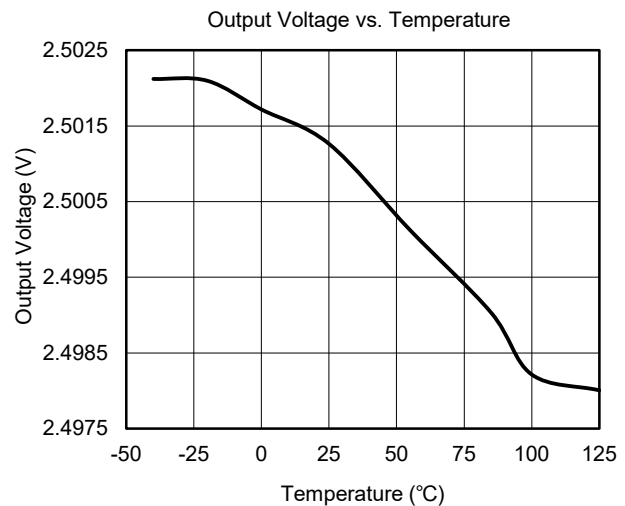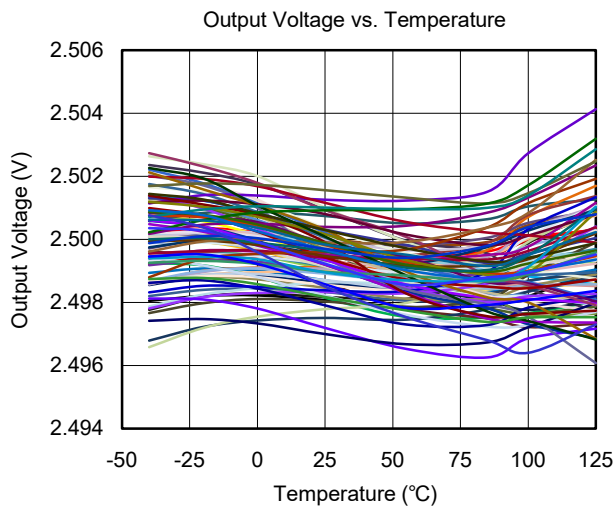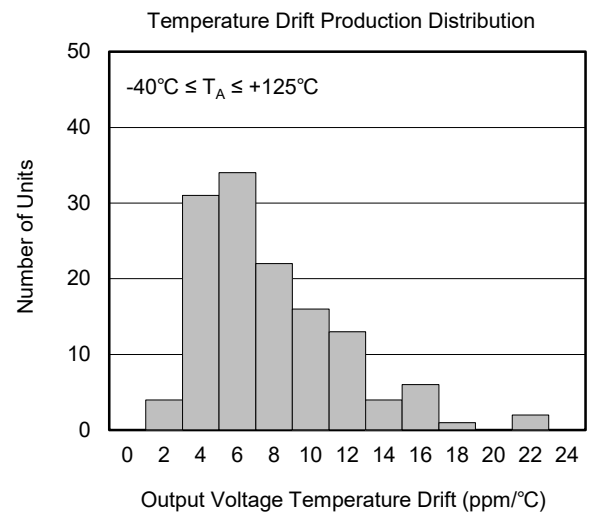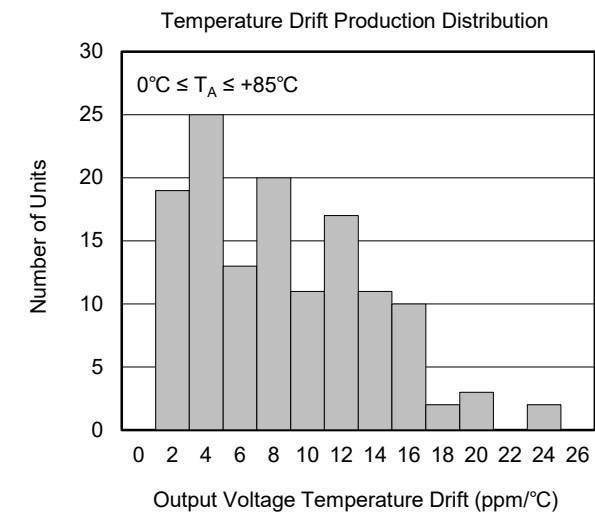TYPICAL PERFORMANCE CHARACTERISTICS

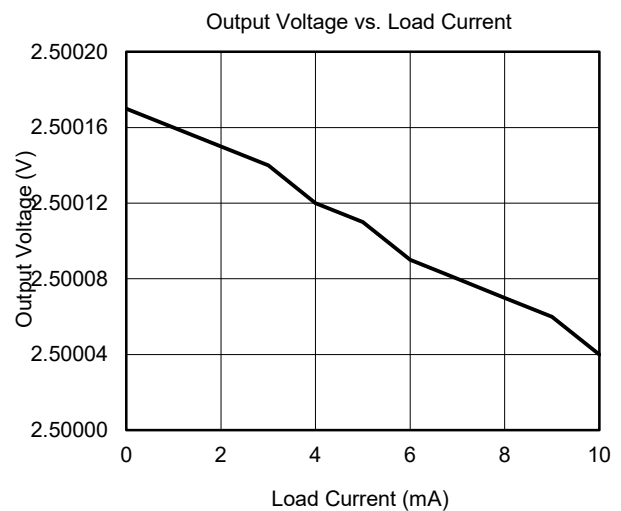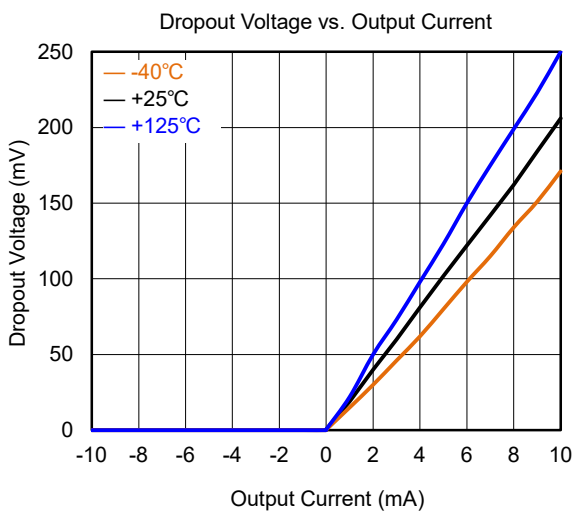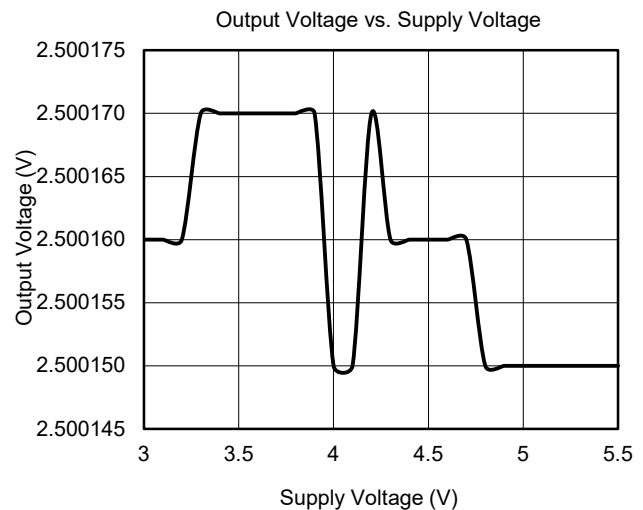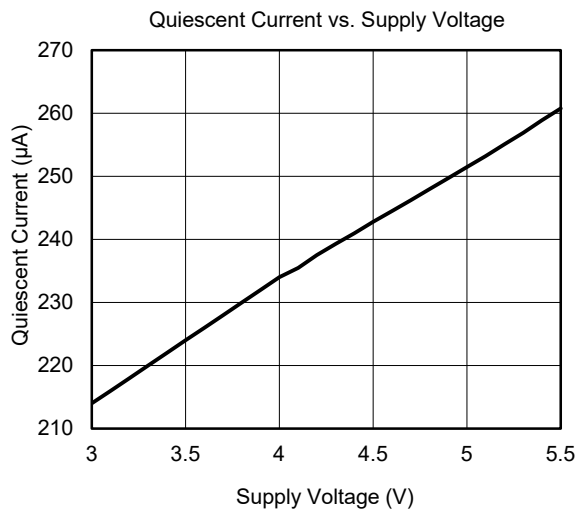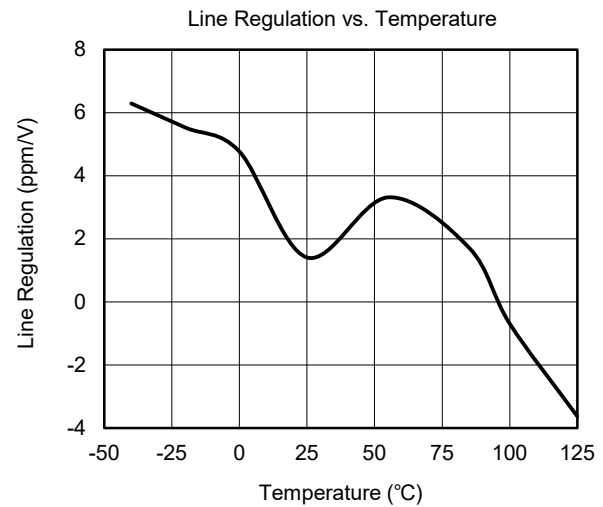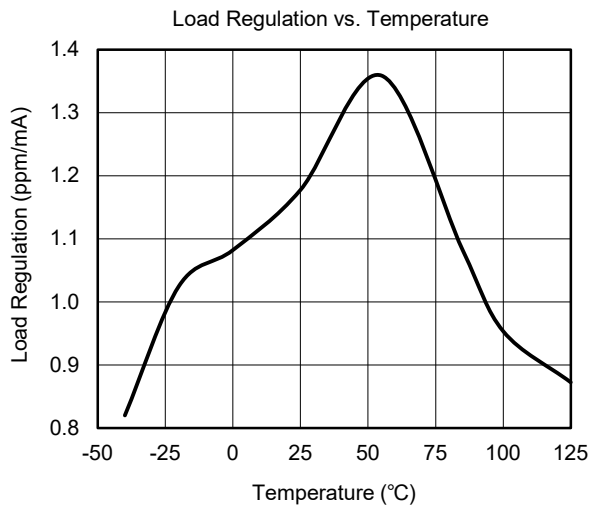
At $T_A = +25^\circ\text{C}$, $V_{\text{OUT}} = 2.5\text{V}$, unless otherwise noted.

TYPICAL PERFORMANCE CHARACTERISTICS (continued)At $T_A = +25^\circ\text{C}$, $V_{\text{OUT}} = 2.5\text{V}$, unless otherwise noted.


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_{OUT} = 2.5\text{V}$, unless otherwise noted.

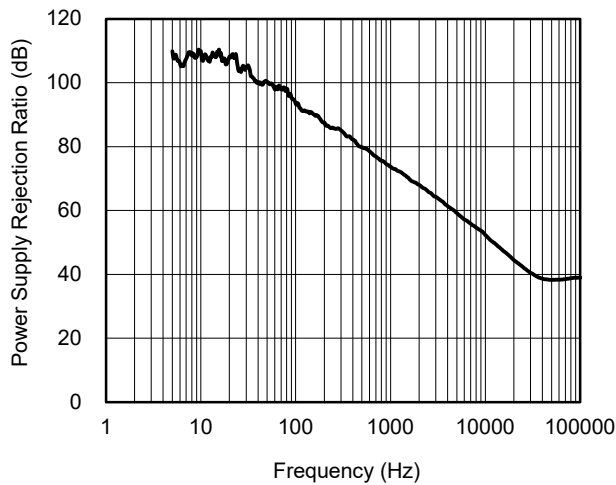
Power Supply Rejection Ratio vs. Frequency



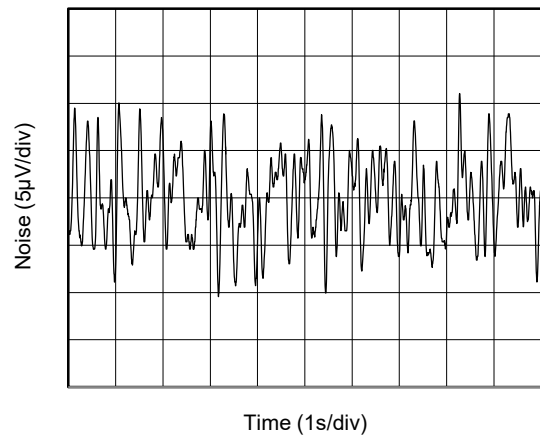
0.1Hz to 10Hz Noise



Start-Up

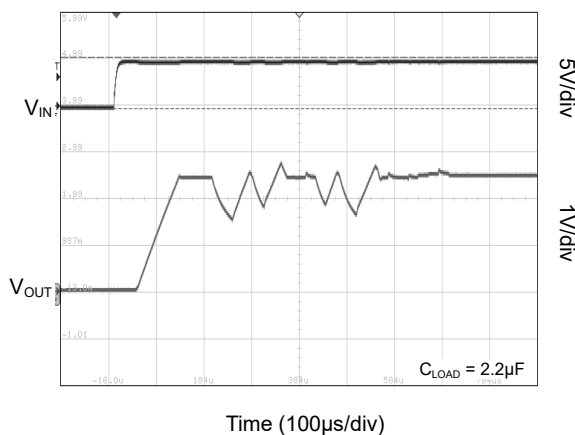


Start-Up

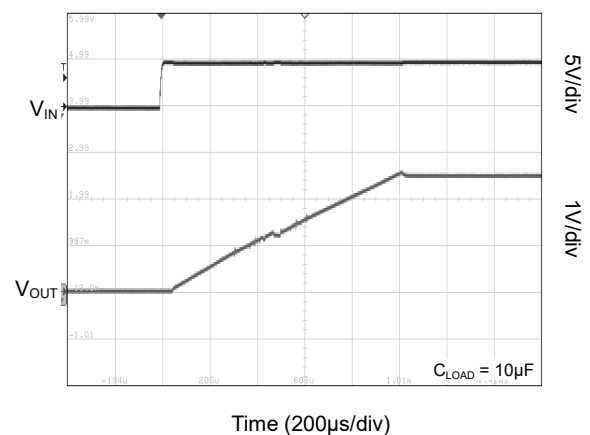


Time (100μs/div)

Time (200μs/div)

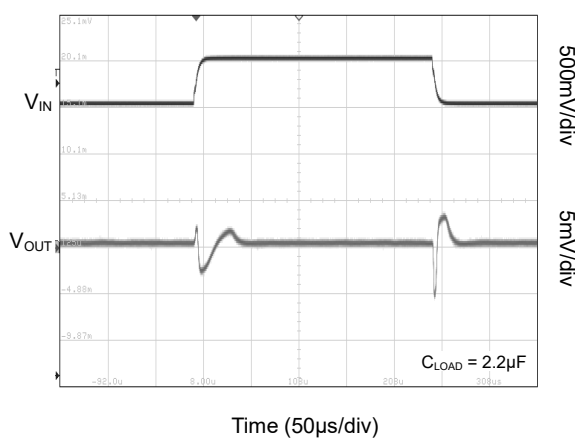Line Transient









Line Transient

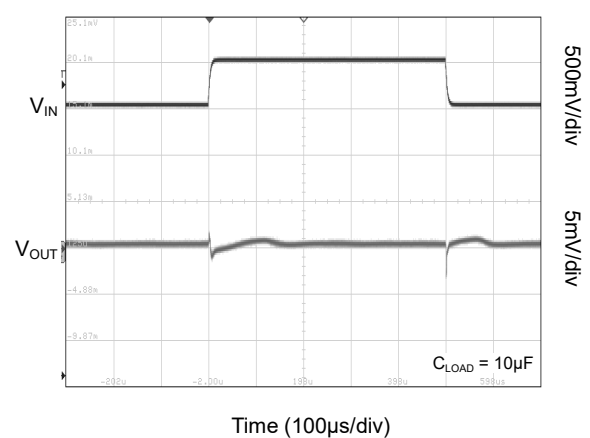

Time (50μs/div)

Time (100μs/div)

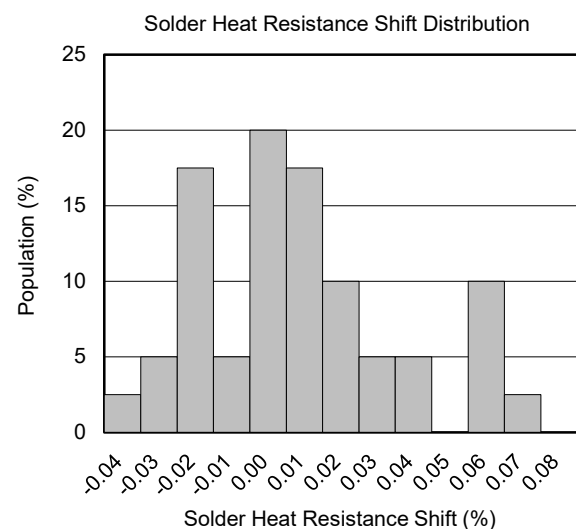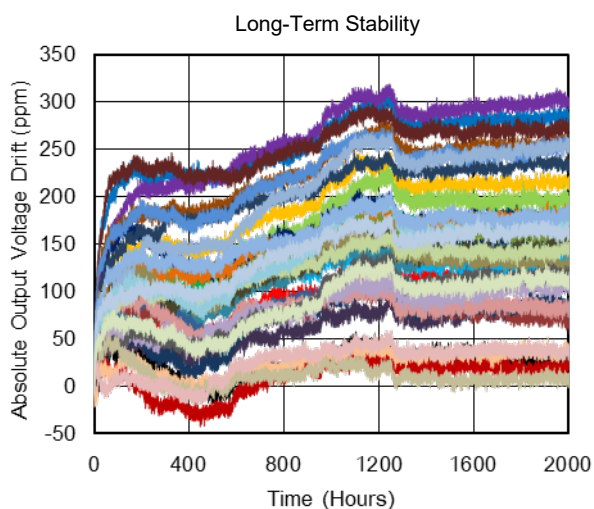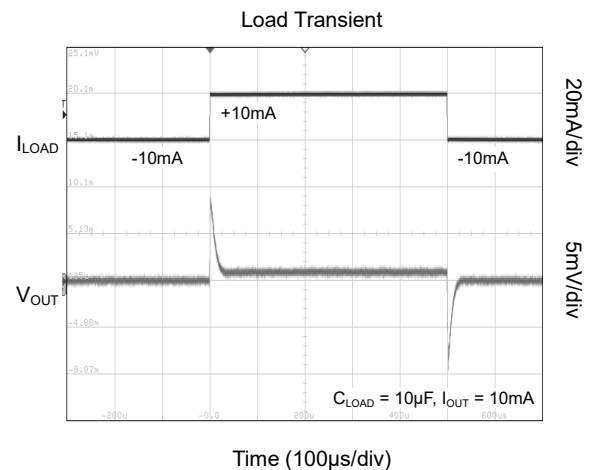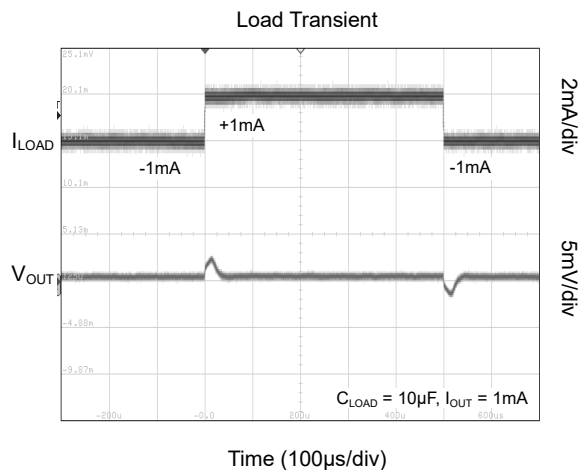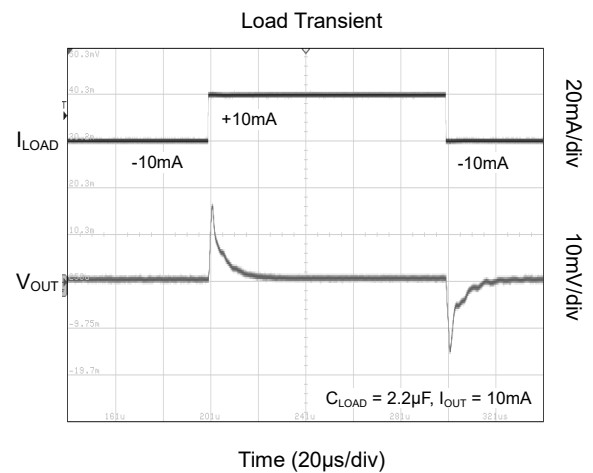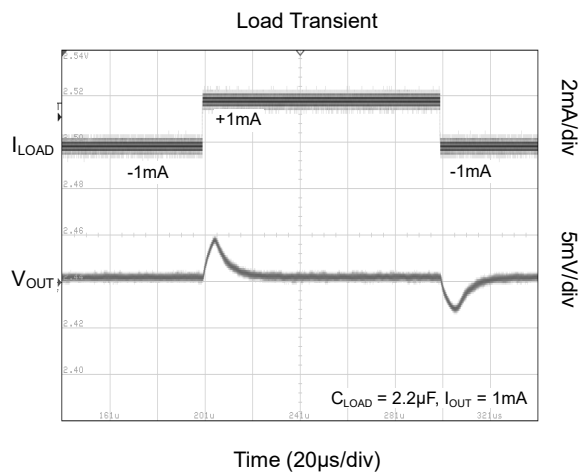TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_{OUT} = 2.5\text{V}$, unless otherwise noted.

FUNCTIONAL BLOCK DIAGRAM

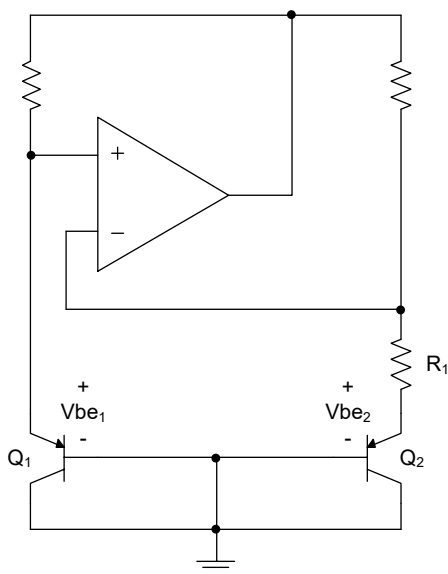


Figure 2. Block Diagram

DETAILED DESCRIPTION

Overview

The SGM4027A is a precision voltage reference with CMOS and bandgap technology and the above block diagram indicates its internal structure. The current density of Q_1 is greater than Q_2 and both two transistors are biased. The voltage across R_1 is the voltage difference of V_{be1} and V_{be2} . Also, the amplifier will amplify this voltage difference ($V_{be1} - V_{be2}$) and feed it back to the emitter of Q_2 , which has a negative temperature coefficient. With doing so, the output voltage cannot be affected by the external temperature. However, there is curvature for the bandgap voltage of the voltage reference, the reason for that is the temperature coefficient of V_{be2} of Q_2 is non-linear.

Feature Description

Supply Voltage

The maximum dropout voltage for SGM4027A series is 0.2V and it can be operated with a power supply between ($V_{REF} + 0.2V$) to 5.5V.

Due to the advantage of ultra-low quiescent current of SGM4027A, the stability of the output voltage is significant enhanced. As illustrated in the Electrical Characteristics, the quiescent current which is measured at +25°C is 245μA, and the maximum one over the temperature range is 340μA. Moreover, over the whole operation range of power supply voltage, the change of quiescent current is less than 50μA.

Thermal Hysteresis

To measure the thermal hysteresis, the V_{OUT} of the device should be measured at the temperature of +25°C. After finishing this, the SGM4027A will be cycled to the other temperatures, and then remove it back to +25°C and measure the V_{OUT} again. In conclusion, this voltage difference is the hysteresis of temperature.

$$V_{HYST} = \frac{|V_{PRE} - V_{POST}|}{V_{NOM}} \times 10^6 (\text{ppm}) \quad (1)$$

where:

V_{HYST} is the thermal hysteresis.

V_{PRE} is the output voltage measured at +25°C before the device is removed to the temperature range of -40°C to +125°C.

V_{POST} is the output voltage measured at +25°C after the device is removed to the temperature range of -40°C to +125°C.

V_{NOM} is the output voltage which is specified.

Temperature Drift

Usually, the temperature change slightly affects the output of SGM4027A. To evaluate this temperature drift, the Box Method is being used. After calculation, it is discovered that the temperature drift over the temperature range of -40°C to +125°C is 10ppm/°C (TYP).

Noise Performance

For the frequency within 0.1Hz to 10Hz, it is guaranteed that the noise level is below 9.5μV_{PP}/V. The external temperature and V_{OUT} can increase the noise level. The technology of filtering can be taken into account to decrease the level of noise; however, this may increase the output impedance of SGM4027A and degrade the performance of AC output signal.

Long-Term Stability

Usually, SGM4027A measures the output voltage drift for several months or years to check if the V_{OUT} will change for long-term period. The curve of the long-term stability illustrates how the output voltage changes. Typically, from 0 to 1000 hours, the drift value is 120ppm; from 1000 hours to 2000 hours, the drift value is 20ppm. To evaluate this parameter, 39 units of SGM4027A are evaluated to guarantee the long-term stability.

Load Regulation

Different load current can result in load regulation. To measure the load regulation, the technology of sense and force contacts should be used, which is shown in Figure 3. To enhance the accuracy and reduce the effect of the trace and contact resistance, the lines should be tied to the output pin of SGM4027A directly. In conclusion, the force and sense line can decrease the impact of load regulation.

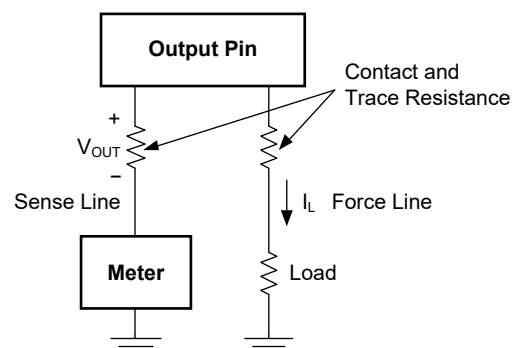


Figure 3. Accurate Load Regulation of SGM4027A

DETAILED DESCRIPTION (continued)**Device Functional Modes****Negative Reference Voltage**

If users desire to use SGM4027A to guarantee positive and negative voltage, SGM4027A and SGM8263 should be taken into account. In Figure 4, the output of SGM8263 is equal to the negative value of SGM4027A. The following circuit can also guarantee the accuracy as the offset voltage and drift of SGM8263 is also extreme low. In addition, the temperature coefficient of two resistors should be taken into account.

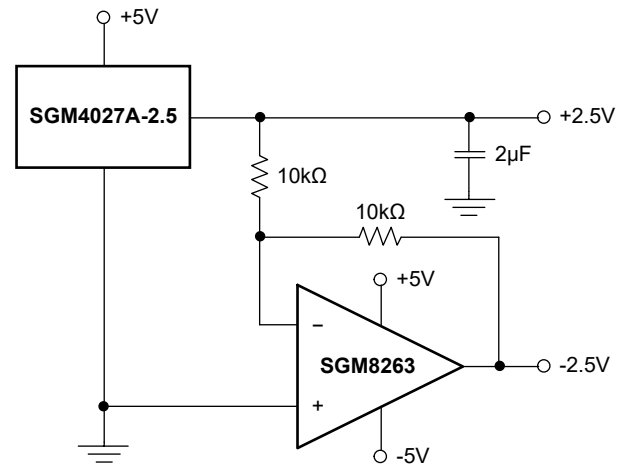


Figure 4. Positive and Negative Voltage Reference

APPLICATION INFORMATION

The advantage of accuracy and stability is beneficial for SGM4027A to be used as a voltage reference for analog-to-digital converters (ADC). Figure 5 shows a data acquisition system with SGM4027A.

24-Bit, 32KSPS Data Acquisition System

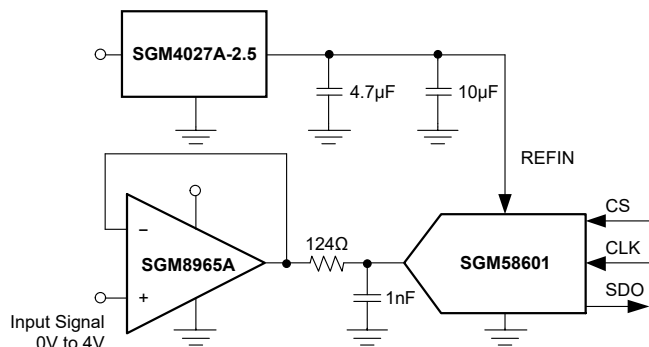


Figure 5. Data Acquisition System with SGM4027A

Design Requirements

The output capacitor should guarantee a desired filtering performance for SGM4027A. For enhance the stability, a bypass capacitor must be added at the input pin of SGM4027A. In addition, a buffer and an RC filter should also be added at the input pin of the analog-to-digital converter to provide high driven performance and filter the noise from the input signal.

Detailed Design Procedure

The bandwidth of RC filter which is at the output of the buffer should be at least 4 times less than the bandwidth of SGM8965A and it can filter out the switch noise, which is provided by ADC when sampling, so the output voltage at 1nF capacitor will be settled to 24-bit accuracy within the corresponding acquisition time. In addition, to provide a voltage reference for SGM58601, SGM4027A-2.5 should be taken into account so that the full-scale input voltage for SGM58601 is 5V ($V_{FS} = 2V_{REF}$).

Basic Connection

For typical connection which is shown in Figure 6, it is recommended that a capacitor from 2μF to 22μF should be connected at the OUT pin. For the condition of capacitive load, please take care when using low ESR capacitor or high capacitance. A 0.47μF capacitor should be connected to the IN pin for stability.

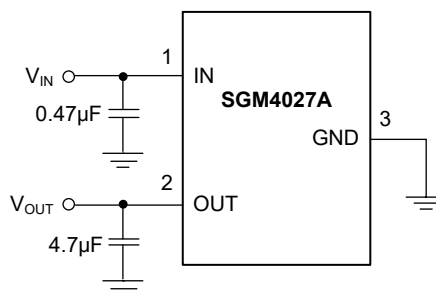


Figure 6. Typical Connections for Operating SGM4027A

Layout Guidelines

Some key considerations of printed-circuit board (PCB) layout using the SGM4027A are:

- ◆ A low ESR bypass capacitor with 0.47μF should be added at the input of SGM4027A.
- ◆ A decouple capacitor should be also added for the device which is associated with SGM4027A.
- ◆ A solid ground plane should be taken into account to decrease EMI and distribute heat.
- ◆ The external passive devices should be added as close as possible to SGM4027A in order to reduce the error which is from the parasitic parameter.
- ◆ The length of trace in PCB for the connections of ADC and INA should be as short as possible to decrease any possible noise.
- ◆ The analog trace should not be parallel with the digital trace to prevent the crosstalk. If the PCB is complicated and the crossing of these two traces cannot be avoid, then please make them in the different layer and keep perpendicular.


REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

JULY 2025 – REV.A to REV.A.1	Page
Updated Absolute Maximum Ratings section.....	2
Updated Recommended Operating Conditions section.....	2
Updated Electrical Characteristics section	5
Changes from Original (SEPTEMBER 2023) to REV.A	Page
Changed from product preview to production data.....	All

PACKAGE OUTLINE DIMENSIONS

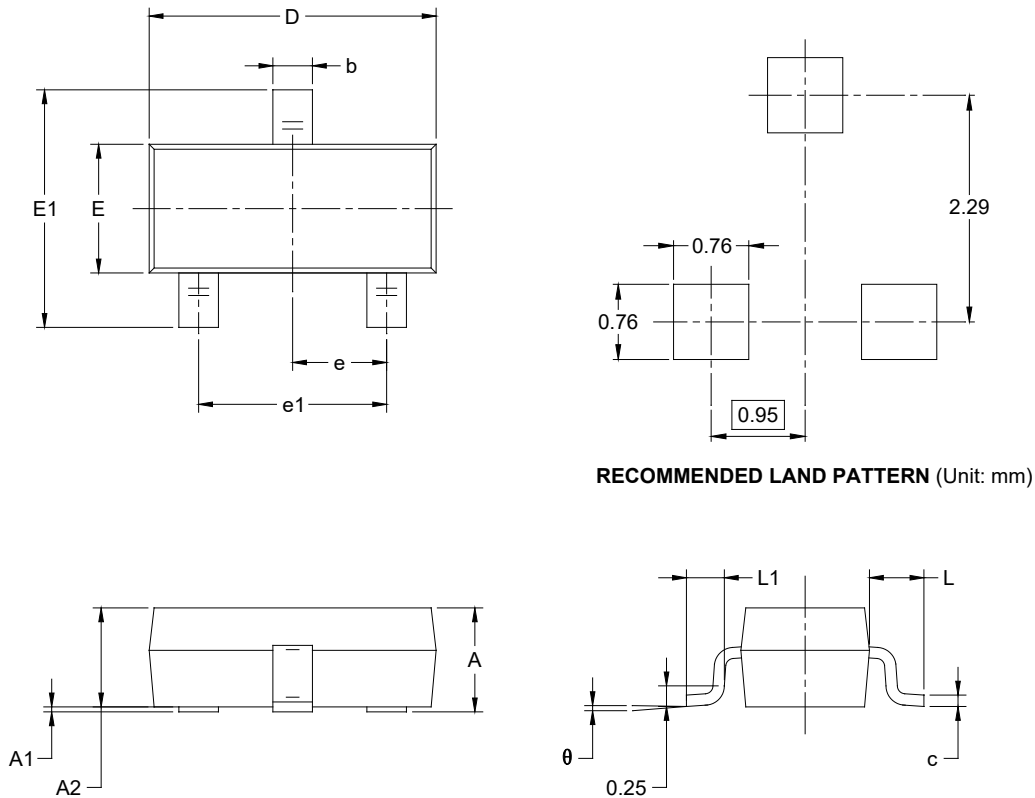SOT-23



RECOMMENDED LAND PATTERN (Unit: mm)

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.89	1.12	0.035	0.044
A1	0.01	0.10	0.000	0.004
A2	0.88	1.02	0.035	0.040
b	0.30	0.50	0.012	0.020
c	0.08	0.20	0.003	0.008
D	2.80	3.04	0.110	0.120
E	1.20	1.40	0.047	0.055
E1	2.10	2.64	0.083	0.104
e	0.95 BSC		0.037 BSC	
e1	1.90 BSC		0.075 BSC	
L	0.54 REF		0.021 REF	
L1	0.40	0.60	0.016	0.024
θ	0°	8°	0°	8°

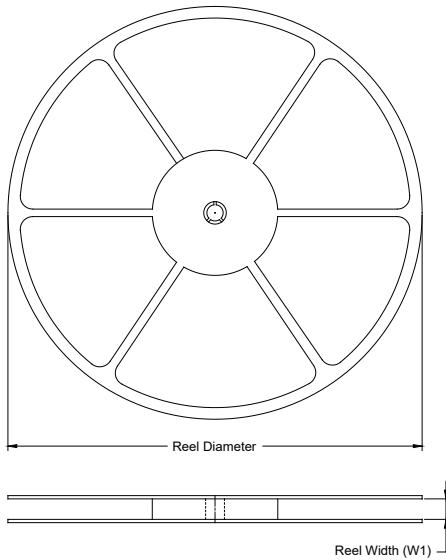
NOTES:

1. Body dimensions do not include mold flash or protrusion.
2. This drawing is subject to change without notice.


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS



TAPE DIMENSIONS

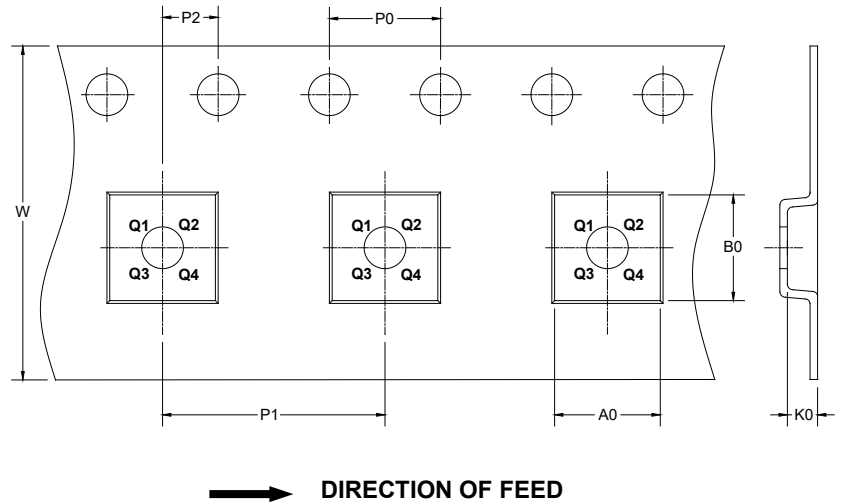

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23	7"	9.5	3.15	2.77	1.22	4.0	4.0	2.0	8.0	Q3

DD00001

PACKAGE INFORMATION

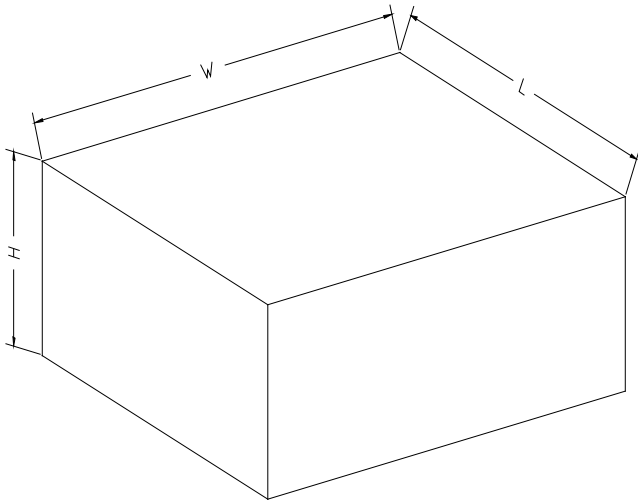CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002