

GENERAL DESCRIPTION

The SGM2578S/SGM2578SD family is a single load switch with reverse current protection function. The device can operate from 1.2V to 5.5V single supply and has the ability to drive up to 2A continuous current.

The device contains a 20mΩ low $R_{DS(ON)}$ N-MOSFET controlled by the ON pin. During power-up, a smart pull-down resistor is used to avoid the ON pin floating. Once the ON pin reaches a high voltage ($> V_{IH}$), the smart pull-down resistor is disconnected, which reduces the standby current and power loss. The small package and low $R_{DS(ON)}$ make the device very suitable for space limited, battery powered applications.

The device supports a wide input voltage range, which is suitable for different voltage rails. The rise time is used to avoid inrush current. The SGM2578SD offers the quick output discharge function in disabled status.

The SGM2578S and SGM2578SD are available in a Green WLCSP-0.9×0.9-4B-D package.

FEATURES

- Input Voltage Range: 1.2V to 5.5V
- Low On-Resistance: 20mΩ (TYP)
- Low Shutdown Current: 0.15μA (TYP)
- Low Quiescent Current: 0.24μA (TYP)
- Maximum Continuous Current: 2A
- Reverse Current Protection When Disabled
- Low Threshold 1.2V GPIO Control Input
- Smart ON
- Controlled Slew Rate
- Quick Output Discharge (SGM2578SD Only)
- Available in a Green WLCSP-0.9×0.9-4B-D Package

APPLICATIONS

Mobile Phone
 Ultrabook
 Tablet PC
 Digital Camera
 Wearable Technology
 Solid State Drive

TYPICAL APPLICATION

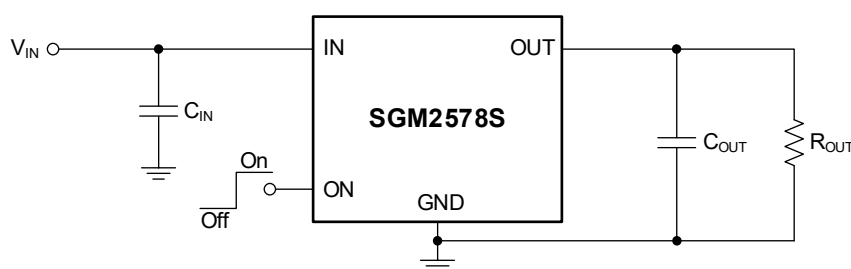


Figure 1. Typical Application Circuit

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM2578S	WLCSP-0.9×0.9-4B-D	-40°C to +125°C	SGM2578SYG/TR	03 XX	Tape and Reel, 3000
SGM2578SD	WLCSP-0.9×0.9-4B-D	-40°C to +125°C	SGM2578SDYG/TR	00 XX	Tape and Reel, 3000

MARKING INFORMATION

NOTE: XX = Date Code.

YY — Serial Number
X X
└── Date Code - Week
└── Date Code - Year

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Input Voltage Range, V_{IN}..... -0.3V to 6V
Output Voltage Range, V_{OUT}..... -0.3V to 6V
ON Pin Voltage Range, V_{ON}..... -0.3V to 6V
Maximum Continuous Switch Current, I_{MAX}..... 2A
Package Thermal Resistance
WLCSP-0.9×0.9-4B-D, θ_{JA}..... 211.3°C/W
WLCSP-0.9×0.9-4B-D, θ_{JB}..... 79.5°C/W
WLCSP-0.9×0.9-4B-D, θ_{JC}..... 70.8°C/W
Junction Temperature +150°C
Storage Temperature Range..... -65°C to +150°C
Lead Temperature (Soldering, 10s) +260°C
ESD Susceptibility ^{(1) (2)}
HBM..... ±3000V
CDM ±1000V

NOTES:

1. For human body model (HBM), all pins comply with ANSI/ESDA/JEDEC JS-001 specifications.
2. For charged device model (CDM), all pins comply with ANSI/ESDA/JEDEC JS-002 specifications.

RECOMMENDED OPERATING CONDITIONS

Input Voltage Range, V_{IN}..... 1.2V to 5.5V
Output Voltage Range, V_{OUT}..... 0V to 5.5V
ON Pin Input High Voltage, V_{IH}..... 0.71V to 5.5V
ON Pin Input Low Voltage, V_{IL}..... 0V to 0.3V
Operating Junction Temperature Range -40°C to +125°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

ESD SENSITIVITY CAUTION


This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATION

(TOP VIEW)




WLCSP-0.9×0.9-4B-D

PIN DESCRIPTION

PIN	NAME	FUNCTION
A1	OUT	Switch Output.
A2	IN	Switch Input. It is recommended to use a bypass capacitor (ceramic) to ground.
B1	GND	Ground.
B2	ON	Switch Control Input. Setting the ON pin to a high logic level enables the device, and setting it to a low logic level disables the device.

FUNCTIONAL BLOCK DIAGRAM

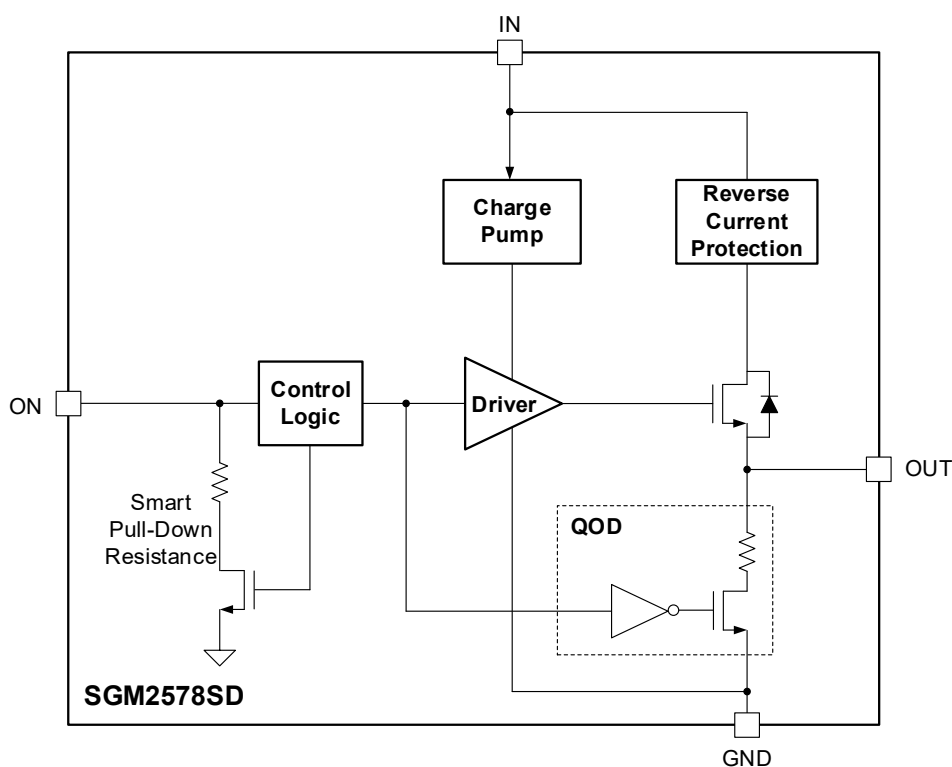

ELECTRICAL CHARACTERISTICS

(For SGM2578SD only, T_J = -40°C to +125°C, V_{IN} = 1.2V to 5.5V, C_{IN} = 1μF, C_{OUT} = 0.1μF, typical values are at T_J = +25°C, unless otherwise noted.)


PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Voltage Range	V _{IN}		1.2		5.5	V
UVLO Threshold, Rising	V _{UVLO_R}			0.9	1.15	V
UVLO Hysteresis	V _{UVLO_HYS}			70		mV
Quiescent Current	I _Q	V _{IN} = 5.5V, V _{ON} = 1.2V, I _{OUT} = 0mA		0.59	1.9	μA
		V _{IN} = 3.3V, V _{ON} = 1.2V, I _{OUT} = 0mA		0.39	1.3	
		V _{IN} = 1.2V, V _{ON} = 1.2V, I _{OUT} = 0mA		0.24	0.85	
Shutdown Current	I _{SD}	V _{IN} = 5.5V, V _{ON} = 0V	T _J = -40°C to +85°C	0.15	0.6	μA
			T _J = -40°C to +125°C	0.15	1.9	
Supply Leakage Current in Shutdown Mode	I _{LEAKAGE}	V _{IN} = 5.5V, V _{ON} = 0V, V _{OUT} = 0V	T _J = -40°C to +85°C	0.15	0.6	μA
			T _J = -40°C to +125°C	0.15	1.9	
On-Resistance	R _{DS(on)}	V _{IN} = 5.5V, V _{ON} = 1.2V, I _{OUT} = -200mA		20	44	mΩ
		V _{IN} = 3.3V, V _{ON} = 1.2V, I _{OUT} = -200mA		20	44	
		V _{IN} = 1.2V, V _{ON} = 1.2V, I _{OUT} = -200mA		25		
ON Pin Leakage Current	I _{ON}	V _{ON} = 5.5V		10	670	nA
Reverse Current When Disabled	I _{RC}	V _{IN} = V _{ON} = 0V, V _{OUT} = 5V		10	1400	nA
Output Pull-Down Resistance	R _{PD}	V _{IN} = 3.3V, V _{ON} = 0V, I _{OUT} = 1mA		230	300	Ω
Smart Pull-Down Resistance	R _{PD_ON}	Disabled		1		MΩ
ON Pin Input High Voltage	V _{IH}		0.71			V
ON Pin Input Low Voltage	V _{IL}				0.3	V
True Reverse Current Blocking						
RCB Protection Trip Point	V _{T_RCB}	V _{OUT} - V _{IN}	6	24	50	mV
RCB Hysteresis	V _{RCB_HYS}			30		mV

SWITCHING CHARACTERISTICS

(For SGM2578SD only, $T_J = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, $V_{IN} = 1.2\text{V}$ to 5.5V , $C_{IN} = 1\mu\text{F}$, $C_{OUT} = 0.1\mu\text{F}$, typical values are at $T_J = +25^{\circ}\text{C}$, unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNITS
Turn-On Time	t_{ON}	$V_{IN} = 3.3\text{V}$		620	1600	μs
Turn-Off Time	t_{OFF}	$V_{IN} = 3.3\text{V}$		6		μs
V_{OUT} Rise Time	t_R	$V_{IN} = 3.3\text{V}$		440	800	μs
V_{OUT} Fall Time	t_F	$V_{IN} = 3.3\text{V}$		2		μs
Delay Time	t_D	$V_{IN} = 3.3\text{V}$		480	1300	μs

PARAMETER MEASUREMENT INFORMATION

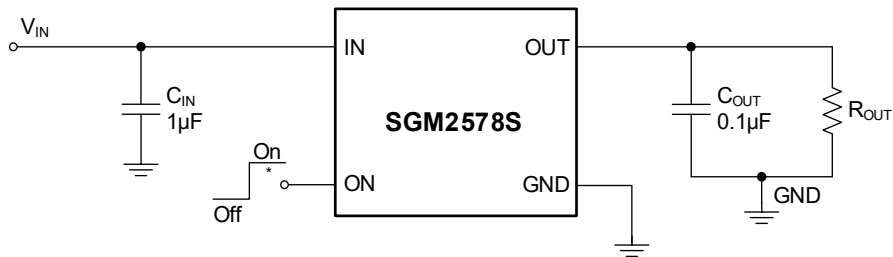

*: Rise and fall times of the control signal are 100ns.

Figure 2. Test Circuit







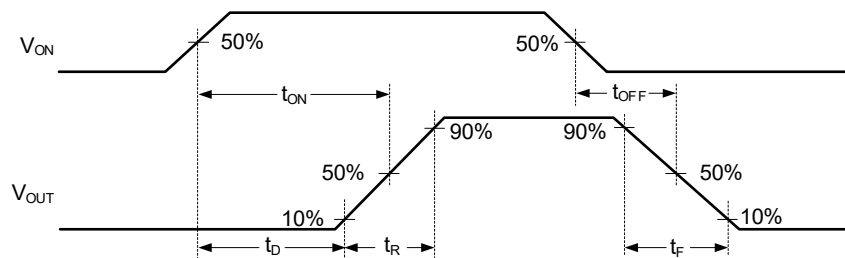


Figure 3. Timing Waveforms







TYPICAL PERFORMANCE CHARACTERISTICS

$T_J = +25^\circ\text{C}$, unless otherwise noted.

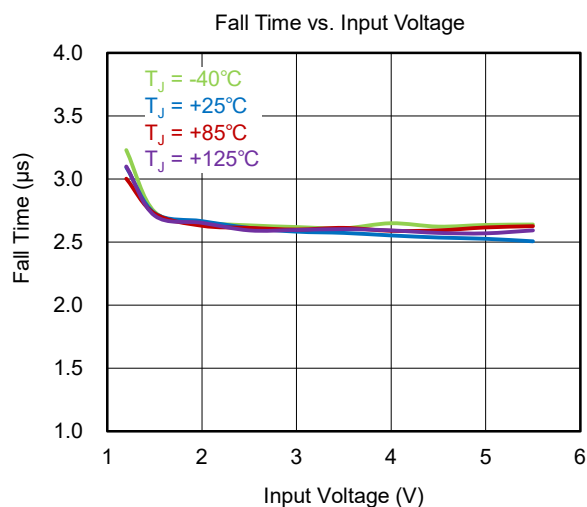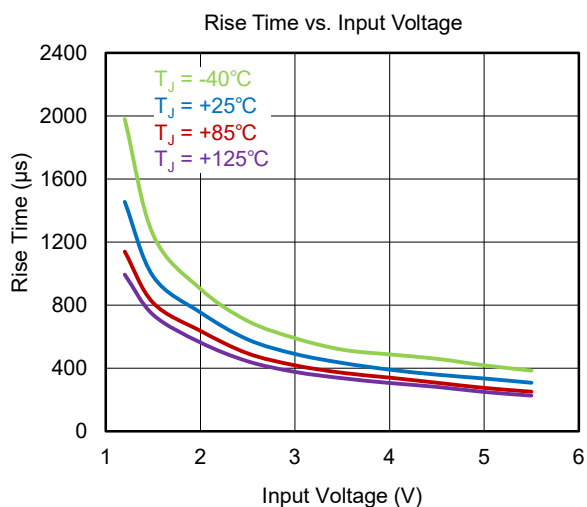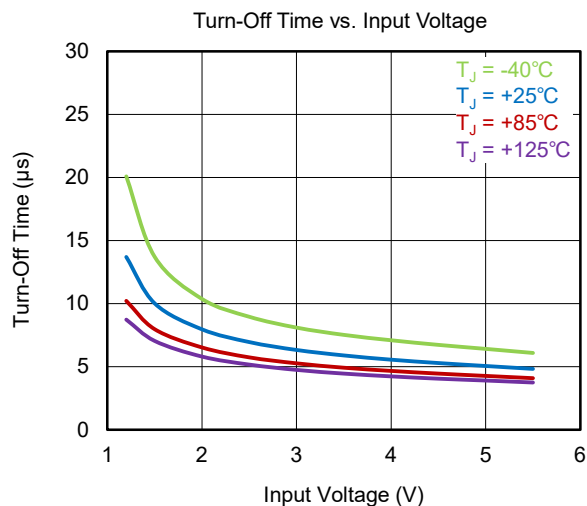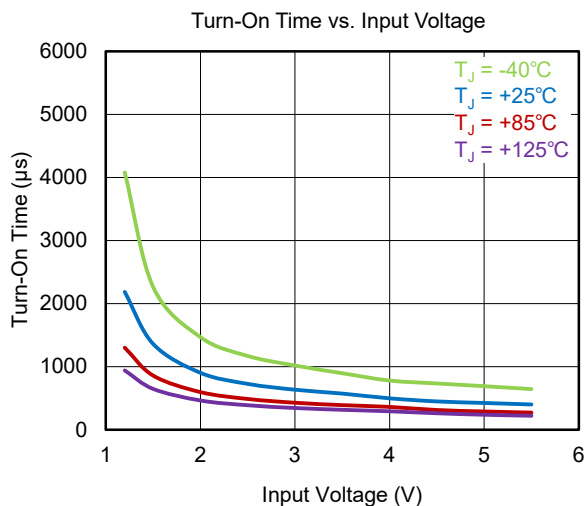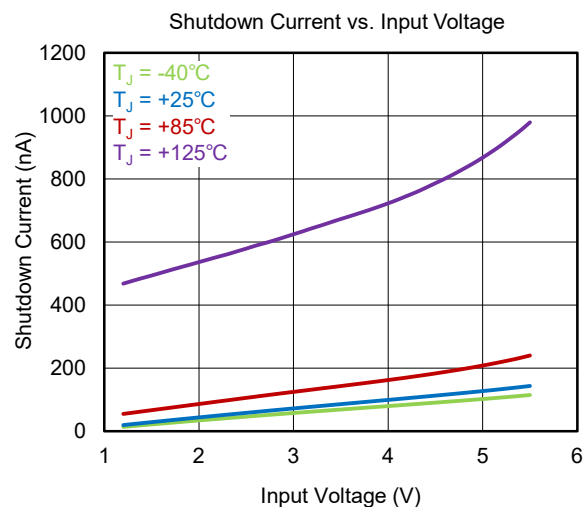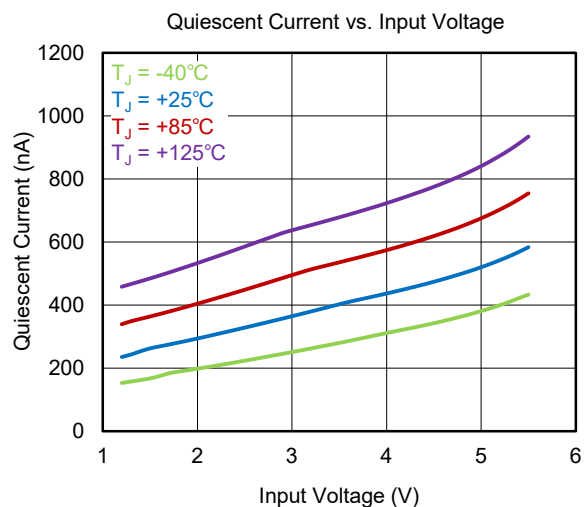

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$T_J = +25^\circ\text{C}$, unless otherwise noted.

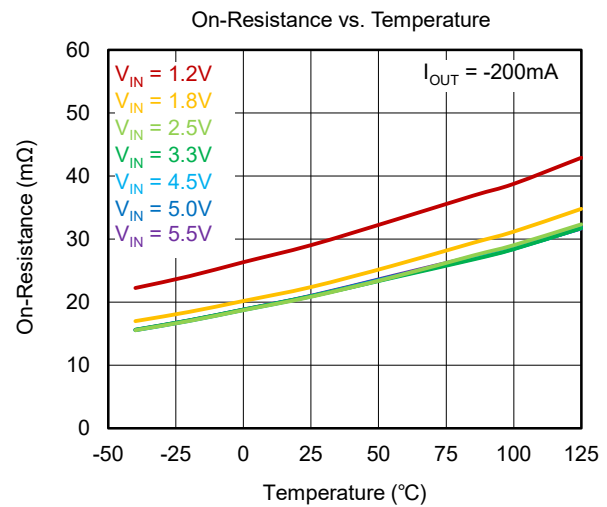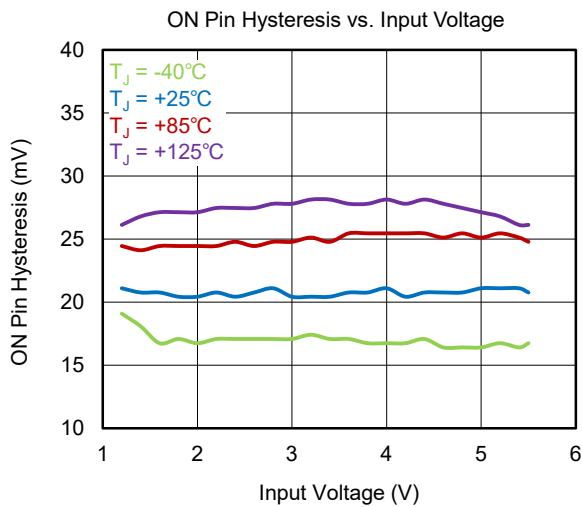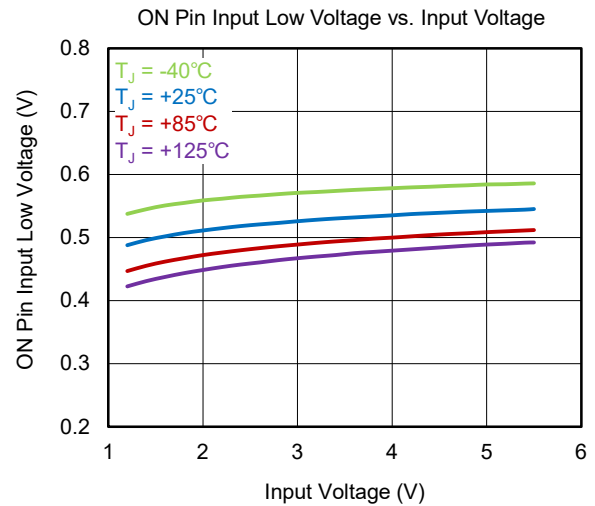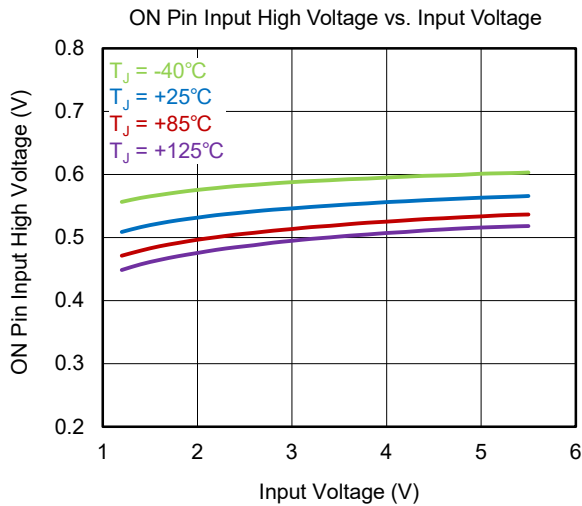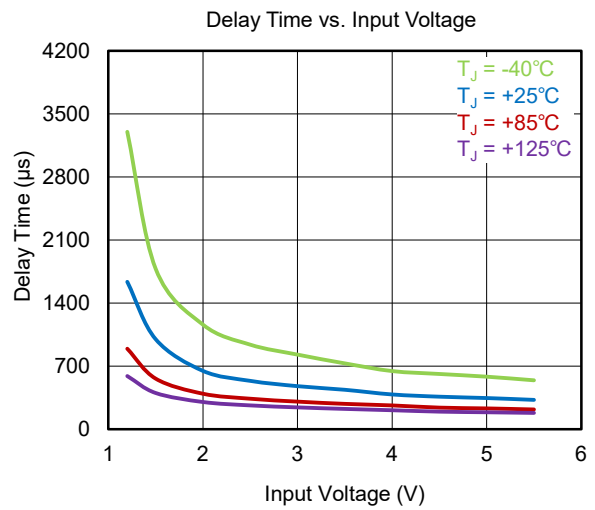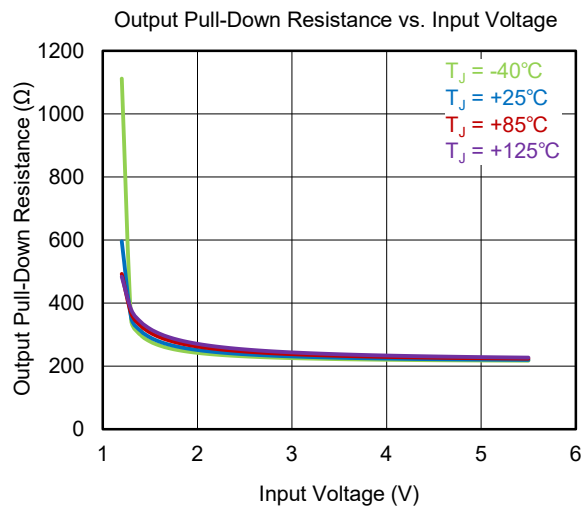

DETAILED DESCRIPTION

The SGM2578S/SGM2578SD family is a single, 4-ball, 2A load switch. A low on-resistance N-MOSFET is integrated, which makes a low voltage drop across the device. To choose suitable rise time is always used to avoid inrush current.

Quick Output Discharge (SGM2578SD Only)

The quick output discharge feature is available for SGM2578SD. If the ON pin is pulled low, a discharge resistor of 230Ω (TYP) is connected between OUT and GND pins to prevent the output from floating when the switch is disabled.

Control Pin

The ON pin can control the device. Setting the ON pin to a high logic level enables the device, and setting it to a low logic level disables the device. It has the ability to interface with low-voltage GPIO. It can support with 1.2V, 1.8V, 2.5V, 3.3V GPIOs.

Table 1. Smart ON Functional Modes

ON	ON Pin
Below V_{IL}	Pull-Down Active
Above V_{IH}	No Pull-Down

APPLICATION INFORMATION

The SGM2578S/SGM2578SD family is a single, up to 2A current capability load switch with low on-resistance. The device has a wide input range, which can be used in different terminal equipment to set power sequence, reduce inrush current and maintain low standby leakage current. The typical application circuit of SGM2578S is shown in Figure 4.

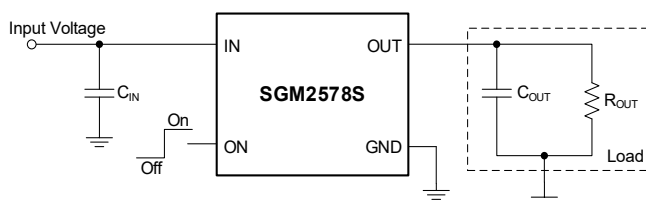


Figure 4. Typical Application Circuit

Input Capacitor

A 1μF input capacitor (C_{IN}) is recommended to use between IN and GND close to the device pins. It can limit the voltage drop on the input supply. Larger C_{IN} can reduce voltage dip in high current applications.


Output Capacitor

A 1μF output capacitor (C_{OUT}) should be placed between OUT and GND as close to the device pins as possible. This capacitor will prevent parasitic board inductances from forcing V_{OUT} below GND when the switch is shutdown.

APPLICATION INFORMATION (continued)

Reverse Current Protection

The reverse current protection function is activated when V_{OUT} is higher than V_{IN} by V_{T_RCB} . The reverse current protection is enabled whether the ON pin is high or low. This function prevents the current flowing from OUT to IN, and is very useful when SGM2578S/SGM2578SD is disabled and the output needs to be driven by another voltage source.

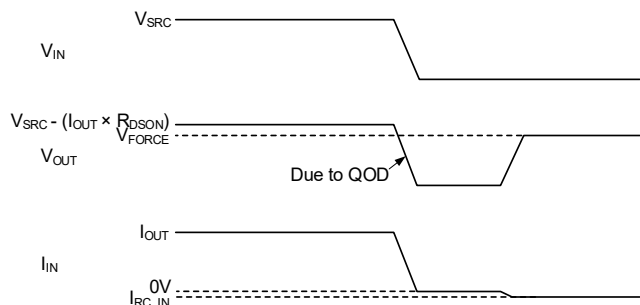

NOTE: V_{SRC} is the input power supply to the equipment. V_{FORCE} is the external power source forced at OUT pin. I_{IN} is the current of IN pin. I_{OUT} is output load current.

Figure 5. Reverse Current Protection

Figure 5 shows how the reverse current protection circuit is activated in SGM2578S. When V_{IN} is turned off, the device is shut down and an external voltage (V_{FORCE}) is forced to OUT pin, the reverse current is tested very small given by I_{RC_IN} . This will prevent any large extra current flowing from the V_{FORCE} (added on V_{OUT}) to V_{IN} .

Power Supply Recommendations

The SGM2578S/SGM2578SD is designed for a wide operate input voltage range of 1.2V to 5.5V. Place a 1μF input bypass capacitor close to the device terminal is recommended.

Power Supply Sequencing without a GPIO Input

In many terminal devices, each module needs to be powered up in a pre-determined manner. SGM2578S/SGM2578SD can set a power sequence by the t_{DELAY} without extra GPIO, and may reduce inrush current. Figure 6 shows the sequence that the ON pin of first load switch is connected to the IN, and the second load switch ON pin is connected to the OUT of first load switch. The second load switch is powered up when the first load switch is turned on, this is the fixed sequence and the delay time set by default t_{DELAY} .

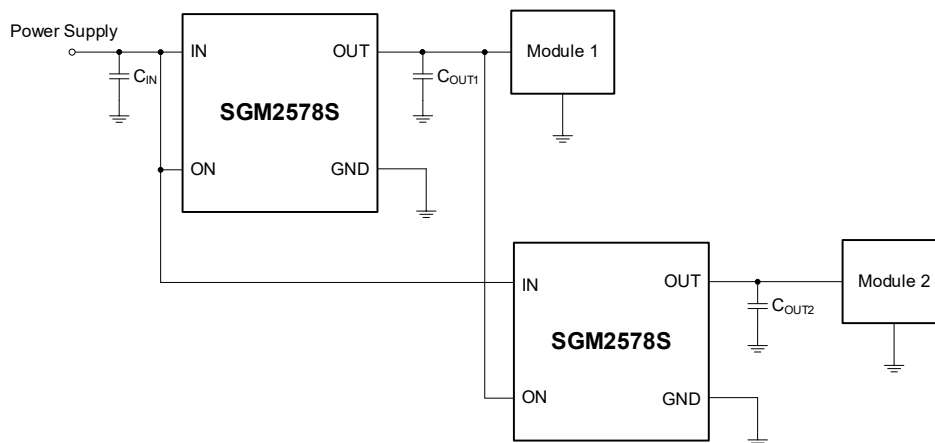


Figure 6. Power Supply Sequencing without a GPIO Input

REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

JULY 2025 – REV.A to REV.A.1

Page

Updated Electrical Characteristics section	4
--	---

Changes from Original to REV.A (JUNE 2025)


Page

Changed from product preview to production data	All
---	-----


PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS


WLCSP-0.9×0.9-4B-D

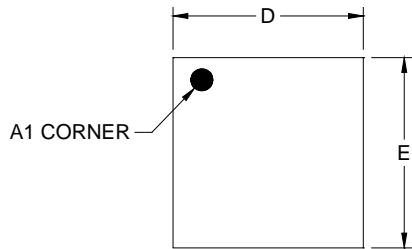


TOP VIEW

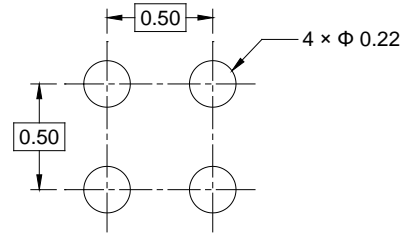

RECOMMENDED LAND PATTERN (Unit: mm)

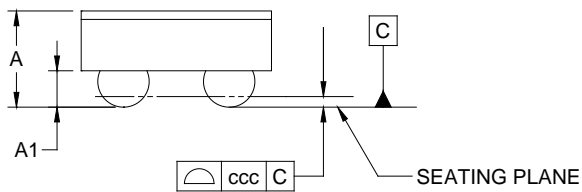

SIDE VIEW

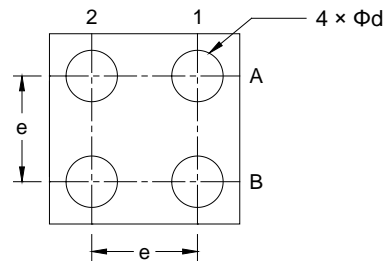

BOTTOM VIEW


Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	-	-	0.493
A1	0.152	-	0.192
D	0.870	-	0.930
E	0.870	-	0.930
d	0.213	-	0.273
e	0.500 BSC		
ccc	0.050		

NOTE: This drawing is subject to change without notice.


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

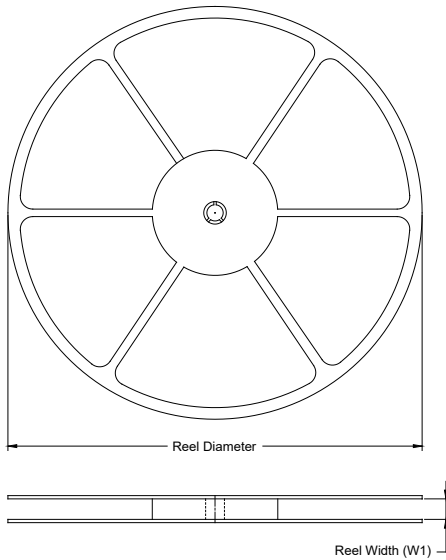

TAPE DIMENSIONS

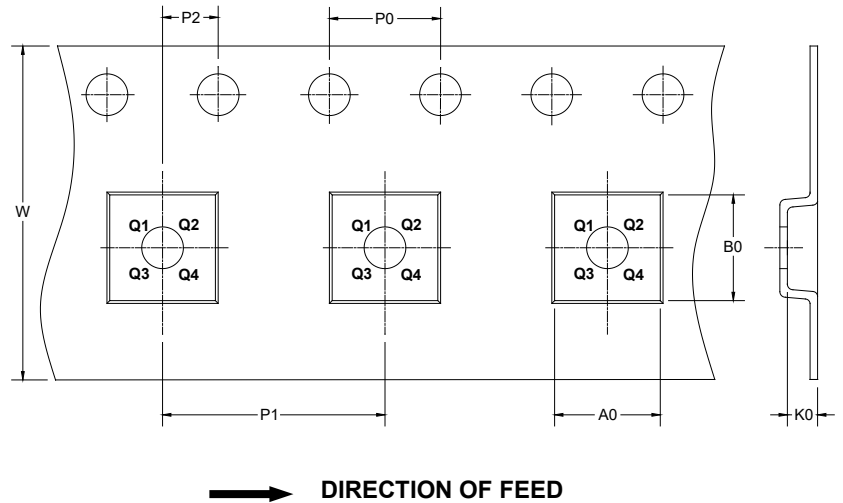

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
WLCSP-0.9×0.9-4B-D	7"	9.0	0.99	0.99	0.59	4.0	4.0	2.0	8.0	Q1

DD00001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

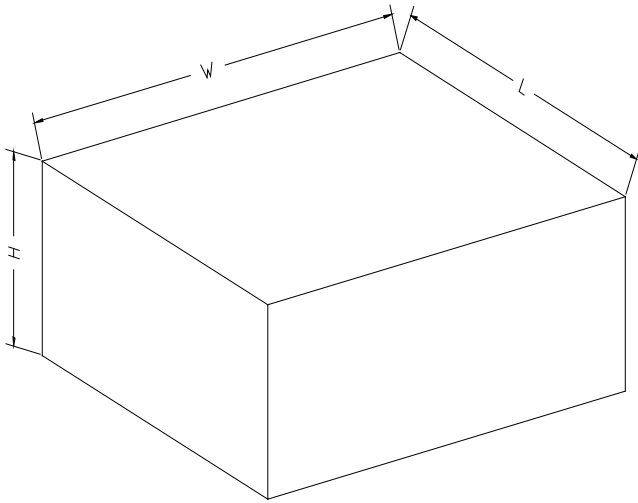

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002