

GENERAL DESCRIPTION

The SGM13003A is a low noise amplifier (LNA) for GLONASS Galileo, Beidou and GPS applications. The device delivers 17.4dB gain at an extremely low noise figure of 1.00dB. It also features high gain and excellent linearity performance that operates from 1160MHz to 1300MHz and 1550MHz to 1615MHz.

The device requires 2.2mA from a single 1.5V to 3.6V supply, dropping to below 1 μ A in power down mode.

No external DC blocking capacitors are required on the RF paths as long as no external DC voltage is applied, which can save PCB area and cost.

The SGM13003A is available in a Green UTDFN-1.1 $\times$ 0.7-6L package.

APPLICATIONS

GPS Chip Module
 Personal Navigation Device (PND)
 Cell Phone with GPS
 MID/PAD with GPS

FEATURES

- **High Gain:**
 - ♦ 17.0dB at 1176.45MHz
 - ♦ 18.0dB at 1227.60MHz
 - ♦ 17.4dB at 1575.42MHz
- **Low Noise Figure:**
 - ♦ 0.96dB at 1176.45MHz
 - ♦ 0.93dB at 1227.60MHz
 - ♦ 1.00dB at 1575.42MHz
- **Low Operation Current: 2.2mA**
- **Current Less than 1 μ A in Power Down Mode**
- **Operating Frequency Range:**
 - ♦ 1160MHz to 1300MHz
 - ♦ 1550MHz to 1615MHz
- **Single Supply Voltage Range: 1.5V to 3.6V**
- **Low Cost BOM**
- **Lead-Free and RoHS Compliant**
- **Available in a Green UTDFN-1.1 $\times$ 0.7-6L Package**

BLOCK DIAGRAM

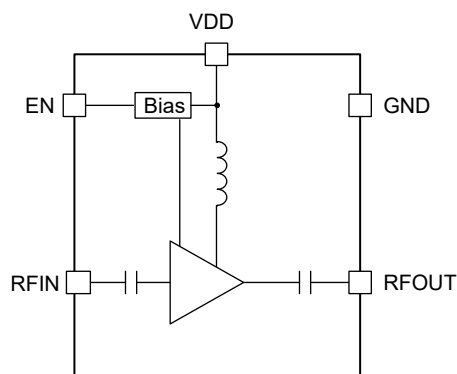


Figure 1. SGM13003A Block Diagram

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM13003A	UTDFN-1.1×0.7-6L	-40°C to +85°C	SGM13003AYUEC6G/TR	00	Tape and Reel, 10000

MARKING INFORMATION

NOTE: Fixed character for 00.

YY
Serial Number

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V_{DD} -0.3V to 4.0V
 EN to GND -0.3V to 4.0V
 RFIN, RFOUT to GND -0.3V to 0.3V
 RF Input Power, P_{IN} 10dBm
 Junction Temperature +150°C
 Storage Temperature Range -55°C to +150°C
 Lead Temperature (Soldering, 10s) +260°C
 ESD Susceptibility ^{(1) (2)}
 HBM ±1000V
 CDM ±2000V

NOTES:

1. For human body model (HBM), all pins comply with ANSI/ESDA/JEDEC JS-001 specifications.
2. For charged device model (CDM), all pins comply with ANSI/ESDA/JEDEC JS-002 specifications.

RECOMMENDED OPERATING CONDITIONS

Operating Temperature Range -40°C to +85°C
 Supply Voltage, V_{DD} 1.5V to 3.6V
 Operating Frequency Range,
 f_0 1160MHz to 1300MHz
 f_0' 1550MHz to 1615MHz
 Control Voltage High, V_{CTL_H} 1.35V to V_{DD}
 Control Voltage Low, V_{CTL_L} 0V to 0.45V

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATION

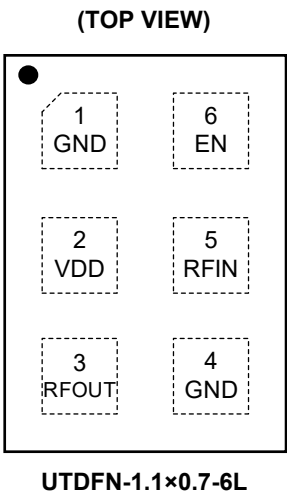

PIN DESCRIPTION

PIN	NAME	FUNCTION
1, 4	GND	Ground.
2	VDD	Power Supply.
3	RFOUT	LNA Output.
5	RFIN	LNA Input from Antenna.
6	EN	Active High Enable Input for the Device. Pull high enable, pull low into power down mode.

ELECTRICAL CHARACTERISTICS

($V_{DD} = 1.5V$ to $3.6V$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$, $f_0 = 1160MHz$ to $1300MHz$, typical values are at $V_{DD} = 2.8V$, $T_A = +25^{\circ}C$, $f_0 = 1176.45MHz$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
DC Characteristics						
Supply Voltage	V _{DD}		1.5		3.6	V
Supply Current	I _{VDD}	EN = High		2.2	6.0	mA
	I _{SD}	EN = Low	0	0.01	1	μA
Control Voltage	V _{CTL_H}	High	1.35	1.8	V _{DD}	V
	V _{CTL_L}	Low	0	0	0.45	
RF Characteristics						
RF Frequency Range	f ₀	None	1160	1176.45	1300	MHz
Power Gain	S21			17.0		dB
Noise Figure	NF			0.96		dB
Input Return Loss	S11			-3.6		dB
Output Return Loss	S22			-4.0		dB
Reverse Isolation	S12			-31.5		dB
Stability	Kf	Frequency range from 0.5GHz to 5GHz	1			
Input Power 1dB Compression Point	P _{1dB}	1176.45MHz		-7.7		dBm
Input In-Band IP3	IIP3_inb	f ₁ = 1175.45MHz, f ₂ = 1176.45MHz, -30dBm		-7.3		dBm
Turn-On Time	t _{ON}	Time from EN on to 90% of the gain		2.2		μs
Turn-Off Time	t _{OFF}	Time from EN off to 10% of the gain		114		ns

($V_{DD} = 1.5V$ to $3.6V$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$, $f_0 = 1160MHz$ to $1300MHz$, typical values are at $V_{DD} = 1.8V$, $T_A = +25^{\circ}C$, $f_0 = 1176.45MHz$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
DC Characteristics						
Supply Voltage	V _{DD}		1.5		3.6	V
Supply Current	I _{VDD}	EN = High		2.4	6.0	mA
	I _{SD}	EN = Low	0	0.01	1	μA
Control Voltage	V _{CTL_H}	High	1.35	1.8	V _{DD}	V
	V _{CTL_L}	Low	0	0	0.45	
RF Characteristics						
RF Frequency Range	f ₀	None	1160	1176.45	1300	MHz
Power Gain	S ₂₁			17.5		dB
Noise Figure	NF			0.91		dB
Input Return Loss	S ₁₁			-3.6		dB
Output Return Loss	S ₂₂			-4.4		dB
Reverse Isolation	S ₁₂			-31.0		dB
Stability	K _f	Frequency range from 0.5GHz to 5GHz	1			
Input Power 1dB Compression Point	P _{1dB}	1176.45MHz		-11.5		dBm
Input In-Band IP3	IIP3_inb	f ₁ = 1175.45MHz, f ₂ = 1176.45MHz, -30dBm		-6.4		dBm
Turn-On Time	t _{ON}	Time from EN on to 90% of the gain		2.4		μs
Turn-Off Time	t _{OFF}	Time from EN off to 10% of the gain		121		ns

ELECTRICAL CHARACTERISTICS (continued)

($V_{DD} = 1.5V$ to $3.6V$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$, $f_0 = 1160MHz$ to $1300MHz$, typical values are at $V_{DD} = 2.8V$, $T_A = +25^{\circ}C$, $f_0 = 1227.60MHz$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
DC Characteristics						
Supply Voltage	V _{DD}		1.5		3.6	V
Supply Current	I _{VDD}	EN = High		2.2	6.0	mA
	I _{SD}	EN = Low	0	0.01	1	μA
Control Voltage	V _{CTL_H}	High	1.35	1.8	V _{DD}	V
	V _{CTL_L}	Low	0	0	0.45	
RF Characteristics						
RF Frequency Range	f ₀	None	1160	1227.60	1300	MHz
Power Gain	S21			18.0		dB
Noise Figure	NF			0.93		dB
Input Return Loss	S11			-4.4		dB
Output Return Loss	S22			-5.7		dB
Reverse Isolation	S12			-30.2		dB
Stability	Kf	Frequency range from 0.5GHz to 5GHz	1			
Input Power 1dB Compression Point	P _{1dB}	1227.60MHz		-8.1		dBm
Input In-Band IP3	IIP3_inb	f ₁ = 1226.60MHz, f ₂ = 1227.60MHz, -30dBm		-8.2		dBm
Turn-On Time	t _{ON}	Time from EN on to 90% of the gain		2.1		μs
Turn-Off Time	t _{OFF}	Time from EN off to 10% of the gain		108		ns

($V_{DD} = 1.5V$ to $3.6V$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$, $f_0 = 1160MHz$ to $1300MHz$, typical values are at $V_{DD} = 1.8V$, $T_A = +25^{\circ}C$, $f_0 = 1227.60MHz$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
DC Characteristics						
Supply Voltage	V _{DD}		1.5		3.6	V
Supply Current	I _{VDD}	EN = High		2.4	6.0	mA
	I _{SD}	EN = Low	0	0.01	1	μA
Control Voltage	V _{CTL_H}	High	1.35	1.8	V _{DD}	V
	V _{CTL_L}	Low	0	0	0.45	
RF Characteristics						
RF Frequency Range	f ₀	None	1160	1227.60	1300	MHz
Power Gain	S21			18.5		dB
Noise Figure	NF			0.91		dB
Input Return Loss	S11			-4.4		dB
Output Return Loss	S22			-6.4		dB
Reverse Isolation	S12			-29.8		dB
Stability	Kf	Frequency range from 0.5GHz to 5GHz	1			
Input Power 1dB Compression Point	P _{1dB}	1227.60MHz		-12.2		dBm
Input In-Band IP3	IIP3_inb	f ₁ = 1226.60MHz, f ₂ = 1227.60MHz, -30dBm		-7.4		dBm
Turn-On Time	t _{ON}	Time from EN on to 90% of the gain		2.3		μs
Turn-Off Time	t _{OFF}	Time from EN off to 10% of the gain		136		ns

ELECTRICAL CHARACTERISTICS (continued)

($V_{DD} = 1.5V$ to $3.6V$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$, $f_0' = 1550MHz$ to $1615MHz$, typical values are at $V_{DD} = 2.8V$, $T_A = +25^{\circ}C$, $f_0' = 1575.42MHz$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
DC Characteristics						
Supply Voltage	V _{DD}		1.5		3.6	V
Supply Current	I _{VDD}	EN = High		2.2	6.0	mA
	I _{SD}	EN = Low	0	0.01	1	μA
Control Voltage	V _{CTL_H}	High	1.35	1.8	V _{DD}	V
	V _{CTL_L}	Low	0	0	0.45	
RF Characteristics						
RF Frequency Range	f ₀ '	None	1550	1575.42	1615	MHz
Power Gain	S21		15.4	17.4		dB
Noise Figure	NF			1.00		dB
Input Return Loss	S11			-7.7		dB
Output Return Loss	S22			-7.4		dB
Reverse Isolation	S12			-28.4	-26.4	dB
Stability	Kf	Frequency range from 0.5GHz to 5GHz	1			
Input Power 1dB Compression Point	P _{1dB}	1575.42MHz		-6.5		dBm
Input In-Band IP3	IIP3_inb	f ₁ = 1574.42MHz, f ₂ = 1575.42MHz, -30dBm		-3.0		dBm
Turn-On Time	t _{ON}	Time from EN on to 90% of the gain		2.1	3.5	μs
Turn-Off Time	t _{OFF}	Time from EN off to 10% of the gain		95	700	ns

($V_{DD} = 1.5V$ to $3.6V$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$, $f_0' = 1550MHz$ to $1615MHz$, typical values are at $V_{DD} = 1.8V$, $T_A = +25^{\circ}C$, $f_0' = 1575.42MHz$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
DC Characteristics						
Supply Voltage	V _{DD}		1.5		3.6	V
Supply Current	I _{VDD}	EN = High		2.4	6.0	mA
	I _{SD}	EN = Low	0	0.01	1	μA
Control Voltage	V _{CTL_H}	High	1.35	1.8	V _{DD}	V
	V _{CTL_L}	Low	0	0	0.45	
RF Characteristics						
RF Frequency Range	f ₀ '	None	1550	1575.42	1615	MHz
Power Gain	S21		15.5	17.5		dB
Noise Figure	NF			0.95		dB
Input Return Loss	S11			-8.1		dB
Output Return Loss	S22			-6.9		dB
Reverse Isolation	S12			-28.4	-26.4	dB
Stability	Kf	Frequency range from 0.5GHz to 5GHz	1			
Input Power 1dB Compression Point	P _{1dB}	1575.42MHz		-10.6		dBm
Input In-Band IP3	IIP3_inb	f ₁ = 1574.42MHz, f ₂ = 1575.42MHz, -30dBm		-3.1		dBm
Turn-On Time	t _{ON}	Time from EN on to 90% of the gain		2.3	3.5	μs
Turn-Off Time	t _{OFF}	Time from EN off to 10% of the gain		141	700	ns

TYPICAL APPLICATION CIRCUIT

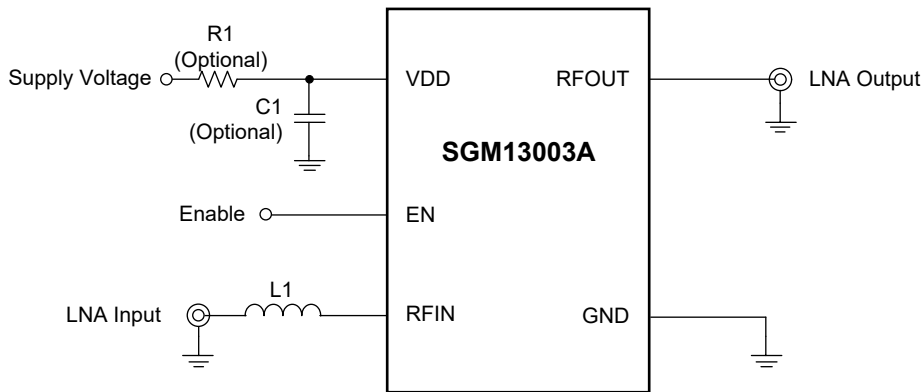


Figure 2. SGM13003A Typical Application Circuit

Table 1. SGM13003A Function Table

Component	Matching Band	Vendor	Type	Part Number & Value
L1	1160MHz to 1300MHz	Murata	Wired inductor, high Q	LQW15AN20N, 20nH
L1	1550MHz to 1615MHz	Murata	Wired inductor, high Q	LQW15AN13N, 13nH

EVALUATION BOARD LAYOUT

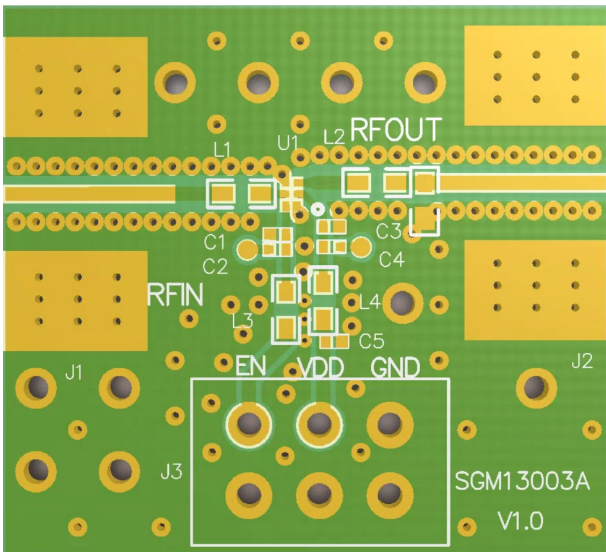


Figure 3. SGM13003A Evaluation Board Layout


REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


JULY 2025 - REV.A.1 to REV.A.2	Page
Updated Package Outline Dimensions.....	9
DECEMBER 2023 - REV.A to REV.A.1	Page
Updated Electrical Characteristics	6
Changes from Original (MAY 2023) to REV.A	Page
Changed from product preview to production data.....	All

PACKAGE OUTLINE DIMENSIONS


UTDFN-1.1×0.7-6L

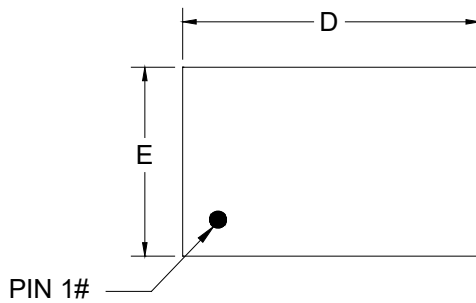


TOP VIEW

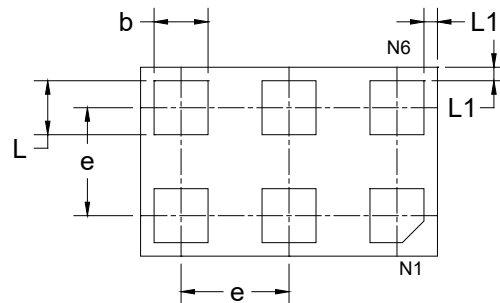

BOTTOM VIEW

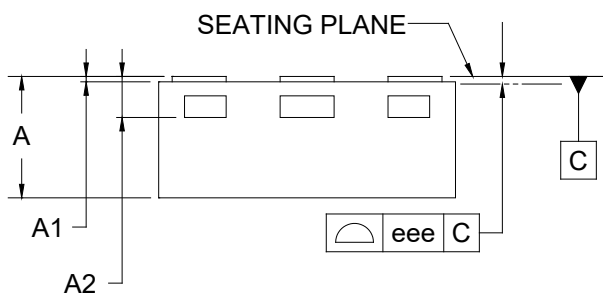

SIDE VIEW

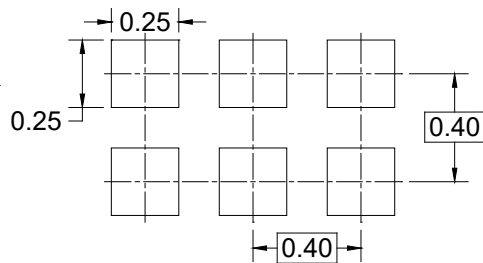

RECOMMENDED LAND PATTERN (Unit: mm)


Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	0.400	-	0.500
A1	0.000	-	0.050
A2	0.152 REF		
b	0.150	-	0.250
D	1.050	-	1.150
E	0.650	-	0.750
e	0.400 BSC		
L	0.150	-	0.250
L1	0.000	-	0.100
eee	0.080		

NOTE: This drawing is subject to change without notice.


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

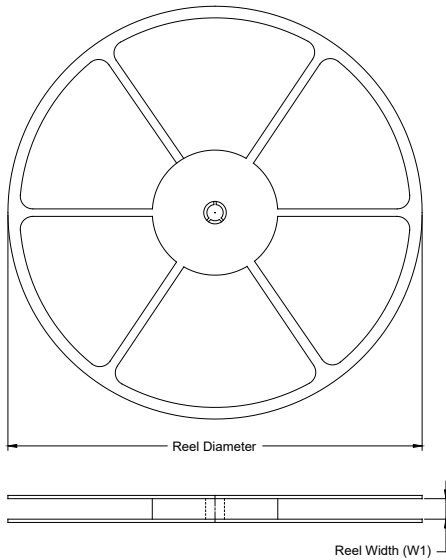

TAPE DIMENSIONS

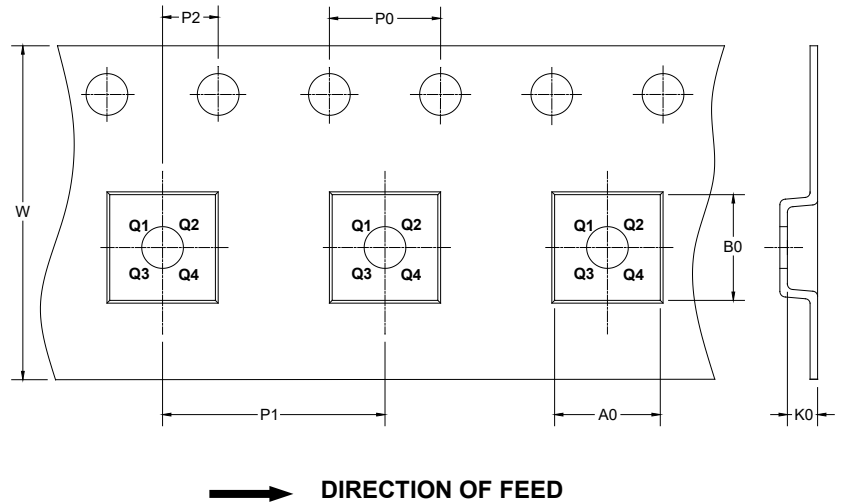

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
UTDFN-1.1×0.7-6L	7"	9.5	0.80	1.20	0.55	4.0	2.0	2.0	8.0	Q1

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

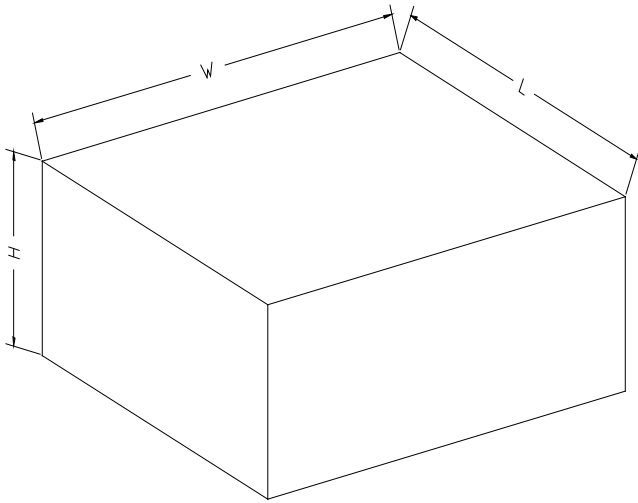

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002