



# SGM8140

## Low Power, Vibration Sensor and PIR Sensor Analog Front End (AFE)

### GENERAL DESCRIPTION

The SGM8140 is a PIR sensor and vibration sensor analog front end which consists of 2 independent building block circuits. One is a dual rail-to-rail input and output operational amplifier, and the other is an ultra-low power comparator. Both the operational amplifier and the comparator have been specifically designed to operate over a wide range of voltages from 1.4V to 5.5V. The SGM8140 only consumes 1.1 $\mu$ A working current, so it is ideal for use in a variety of battery-powered applications.

The operational amplifier is unity-gain stable and features a 5kHz gain-bandwidth product. It is suitable for low frequency systems in the case of monitoring battery current and conditioning sensor signal.

The comparator has a push-pull output, which drive resistive or capacitive with absolute lowest power consumption.

The SGM8140 is available in a Green TQFN-4x4-16L package. It is specified for the -40 °C to +85 °C industrial temperature range.

### FEATURES

- Ultra-Low Power: 1.1 $\mu$ A (TYP) at  $V_S = 5V$
- Wide Supply Voltage Range: 1.4V to 5.5V
- Rail-to-Rail Input and Output Amplifier
- Amplifier Gain-Bandwidth Product:  
5kHz (TYP) at  $V_S = 5V$
- Amplifier is Unity-Gain Stable
- Comparator Propagation Delay: 6 $\mu$ s (TYP)
- Comparator Push-Pull Output Current Drive:  
19mA (TYP) at  $V_S = 5V$
- -40°C to +85°C Operating Temperature Range
- Available in a Green TQFN-4x4-16L Package

### APPLICATIONS


Toll Booth Tags  
Wearable Products  
Battery-Powered Systems  
Temperature Measurements  
Vibration Detectors  
Alarm and Monitoring Circuits

**PACKAGE/ORDERING INFORMATION**

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM8140	TQFN-4x4-16L	-40°C to +85°C	SGM8140YTQE16G/TR	SGM8140 YTQE16 XXXXX	Tape and Reel, 3000

**MARKING INFORMATION**

NOTE: XXXXX = Date Code and Vendor Code.

**XXXXX**

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

**ABSOLUTE MAXIMUM RATINGS**

Supply Voltage, V <sub>CC</sub> .....	6V
Input Common Mode Voltage Range .....	(-V <sub>S</sub> ) - 0.1V to (+V <sub>S</sub> ) + 0.1V
Differential Input Voltage .....	(-V <sub>S</sub> ) - (+V <sub>S</sub> )
Junction Temperature .....	+150°C
Storage Temperature Range.....	-65°C to +150°C
Lead Temperature (Soldering, 10s) .....	+260°C
ESD Susceptibility	
HBM .....	4000V
CDM .....	1000V

may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

**ESD SENSITIVITY CAUTION**

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

**RECOMMENDED OPERATING CONDITIONS**

Operating Temperature Range ..... -40°C to +85°C


**OVERSTRESS CAUTION**

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods


**DISCLAIMER**

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

## PIN CONFIGURATION

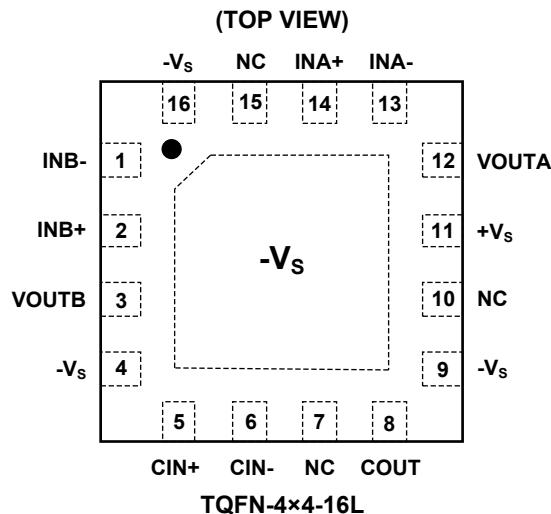

## FUNCTIONAL BLOCK DIAGRAM

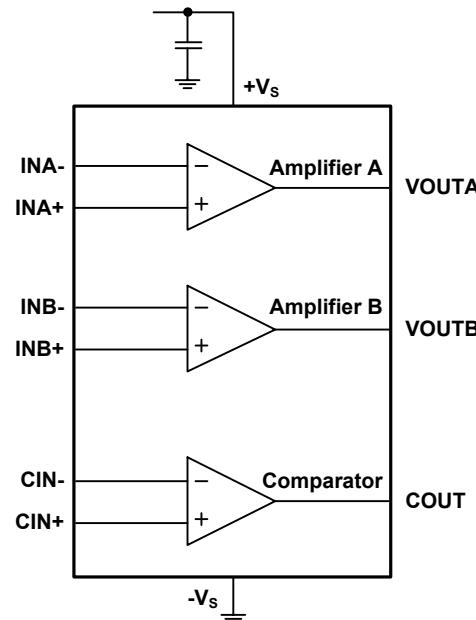

## PIN DESCRIPTION

PIN	NAME	FUNCTION
1	INB-	Negative Input of Amplifier B.
2	INB+	Positive Input of Amplifier B.
3	VOUTB	Output of Amplifier B.
4	-Vs	Negative Supply. Always connect this pin to ground for single power supply application.
5	CIN+	Positive Input of Comparator.
6	CIN-	Negative Input of Comparator.
7	NC	No Connection.
8	COUT	Output of Comparator.
9	-Vs	Negative Supply. Always connect this pin to ground for single power supply application.
10	NC	No Connection.
11	+Vs	Positive Power Supply.
12	VOUTA	Output of Amplifier A.
13	INA-	Negative Input of Amplifier A.
14	INA+	Positive Input of Amplifier A.
15	NC	No Connection.
16	-Vs	Negative Supply. Always connect this pin to ground for single power supply application.

## ELECTRICAL CHARACTERISTICS

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Quiescent Current	$V_S = 5V, V_{CM} = 2.5V, T_A = +25^\circ C$		1.1	2.2	$\mu A$
	$V_S = 1.4V, V_{CM} = 0.7V, T_A = +25^\circ C$		0.9		

## Operational Amplifier Only

( $V_S = 1.4V$  to  $5V$ ,  $-V_S = GND$ ,  $T_A = +25^\circ C$ ,  $V_{CM} = V_S/2$ ,  $V_{OUT} \approx V_S/2$  and  $R_L = 1M\Omega$  to  $V_S/2$ , unless otherwise noted.)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
<b>DC Electrical Characteristics</b>					
Input Offset Voltage ( $V_{OS}$ )	$V_{CM} = V_S/2$		0.4	2.5	mV
Input Offset Voltage Drift ( $\Delta V_{OS}/\Delta T$ )	$V_{CM} = V_S/2$		2		$\mu V/\text{ }^\circ C$
Power Supply Rejection Ratio (PSRR)	$V_S = 1.4V$ to $5.5V$	69	80		dB
Input Common Mode Voltage Range ( $V_{CMR}$ )		$(-V_S) - 0.1$		$(+V_S) + 0.1$	V
Common Mode Rejection Ratio (CMRR)	$V_S = 5V, V_{CM} = -0.1V$ to $5.1V$	68	83		dB
	$V_S = 5V, V_{CM} = 2.5V$ to $5.1V$	67	82		
	$V_S = 5V, V_{CM} = -0.1V$ to $2.5V$	62	77		
Large-Signal Voltage Gain ( $A_{VO}$ )	$V_S = 1.4V, R_L = 50k\Omega, V_{OUT} = (+V_S) - 0.1V$	75	80		dB
	$V_S = 5V, R_L = 50k\Omega, V_{OUT} = (+V_S) - 0.1V$	87	93		
Input Bias Current ( $I_B$ )			1		pA
Input Offset Current ( $I_{OS}$ )			1		pA
Maximum Output Voltage Swing	$V_{OH}$	$V_S = 1.4V, R_L = 50k\Omega$	5	12	mV
		$V_S = 5V, R_L = 50k\Omega$	4	12	
	$V_{OL}$	$V_S = 1.4V, R_L = 50k\Omega$	4.6	12	
		$V_S = 5V, R_L = 50k\Omega$	3.6	12	
Short-Circuit Current ( $I_{SC}$ )	$V_S = 5V$ , source	20	24		mA
	$V_S = 5V$ , sink	20	24		
Supply Voltage		1.4		5.5	V
<b>AC Electrical Characteristics (<math>C_L = 60pF</math>)</b>					
Gain-Bandwidth Product (GBP)	$V_S = 1.4V$		4.3		kHz
	$V_S = 5V$		5		
Slew Rate (SR)	$V_S = 1.4V, V_{OUT} = 1V$ step		1.3		V/ms
	$V_S = 5V, V_{OUT} = 2V$ step		1.6		
Phase Margin (PM)	$V_S = 1.4V$ to $5.5V$		60		°
Input Voltage Noise ( $e_n$ p-p)	$V_S = 1.4V, f = 0.1Hz$ to $10Hz$		4.4		$\mu V_{P-P}$
	$V_S = 5V, f = 0.1Hz$ to $10Hz$		4.0		
Input Voltage Noise Density ( $e_n$ )	$V_S = 1.4V, f = 1kHz$		135		$nV/\sqrt{Hz}$
	$V_S = 5V, f = 1kHz$		130		

**ELECTRICAL CHARACTERISTICS (continued)****Comparator Only**(T<sub>A</sub> = +25°C, V<sub>S</sub> = 1.4V, -V<sub>S</sub> = 0V, V<sub>CM</sub> = V<sub>S</sub>/2 and V<sub>OUT</sub> = -V<sub>S</sub>, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Offset Voltage	V <sub>OS</sub>	V <sub>CM</sub> = 0V		0.5	3.3	mV
		V <sub>CM</sub> = 1.4V		0.5	3.2	
Input Offset Average Drift				2		µV/°C
Common Mode Rejection Ratio	CMRR	V <sub>CM</sub> stepped from 0V to 0.3V		65		dB
		V <sub>CM</sub> stepped from 0.8V to 1.4V		75		
		V <sub>CM</sub> stepped from 0V to 1.4V		75		
Power Supply Rejection Ratio	PSRR	V <sub>S</sub> = 1.8V to 5.5V, V <sub>CM</sub> = 0V	65	95		dB
Large-Signal Voltage Gain	A <sub>VO</sub>			100		dB
Output Swing High	V <sub>OH</sub>	V <sub>S</sub> = 1.8V, I <sub>OUT</sub> = 500µA		131	202	mV
		-40°C ≤ T <sub>A</sub> ≤ +85°C			219	
		V <sub>S</sub> = 1.8V, I <sub>OUT</sub> = 1mA		292	476	
		-40°C ≤ T <sub>A</sub> ≤ +85°C			512	
Output Swing Low	V <sub>OL</sub>	V <sub>S</sub> = 1.8V, I <sub>OUT</sub> = -500µA		82	112	mV
		-40°C ≤ T <sub>A</sub> ≤ +85°C			127	
		V <sub>S</sub> = 1.8V, I <sub>OUT</sub> = -1mA		167	225	
		-40°C ≤ T <sub>A</sub> ≤ +85°C			253	
Output Current	I <sub>OUT</sub>	Source		0.7		mA
		Sink		2.0		
Propagation Delay (High to Low)		Overdrive = 10mV		12		µs
		Overdrive = 100mV		6		
Propagation Delay (Low to High)		Overdrive = 10mV		26		µs
		Overdrive = 100mV		17		
Rise Time	t <sub>Rise</sub>	Overdrive = 10mV, C <sub>L</sub> = 30pF, R <sub>L</sub> = 1MΩ		220		ns
		Overdrive = 100mV, C <sub>L</sub> = 30pF, R <sub>L</sub> = 1MΩ		220		
Fall Time	t <sub>Fall</sub>	Overdrive = 10mV, C <sub>L</sub> = 30pF, R <sub>L</sub> = 1MΩ		155		ns
		Overdrive = 100mV, C <sub>L</sub> = 30pF, R <sub>L</sub> = 1MΩ		155		







**ELECTRICAL CHARACTERISTICS (continued)****Comparator Only (continued)**(T<sub>A</sub> = +25°C, V<sub>S</sub> = 5V, -V<sub>S</sub> = 0V, V<sub>CM</sub> = V<sub>S</sub>/2 and V<sub>OUT</sub> = -V<sub>S</sub>, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Offset Voltage	V <sub>OS</sub>	V <sub>CM</sub> = 0V		0.5	3.3	mV
		V <sub>CM</sub> = 5V		0.5	3.2	
Input Offset Average Drift				2		µV/°C
Common Mode Rejection Ratio	CMRR	V <sub>CM</sub> stepped from 0V to 3.9V		85		dB
		V <sub>CM</sub> stepped from 4.4V to 5V		85		
		V <sub>CM</sub> stepped from 0V to 5V		85		
Power Supply Rejection Ratio	PSRR	V <sub>S</sub> = 1.8V to 5.5V, V <sub>CM</sub> = 0V	65	95		dB
Large-Signal Voltage Gain	A <sub>VO</sub>			105		dB
Output Swing High	V <sub>OH</sub>	I <sub>OUT</sub> = 500µA		48	77	mV
		-40°C ≤ T <sub>A</sub> ≤ +85°C			84	
		I <sub>OUT</sub> = 1mA		96	136	
		-40°C ≤ T <sub>A</sub> ≤ +85°C			152	
Output Swing Low	V <sub>OL</sub>	I <sub>OUT</sub> = -500µA		52	80	mV
		-40°C ≤ T <sub>A</sub> ≤ +85°C			90	
		I <sub>OUT</sub> = -1mA		104	130	
		-40°C ≤ T <sub>A</sub> ≤ +85°C			143	
Output Current	I <sub>OUT</sub>	Source	13.5	18		mA
		-40°C ≤ T <sub>A</sub> ≤ +85°C	11.5			
		Sink	15	19		
		-40°C ≤ T <sub>A</sub> ≤ +85°C	12.9			
Propagation Delay (High to Low)		Overdrive = 10mV		13		µs
		Overdrive = 100mV		6		
Propagation Delay (Low to High)		Overdrive = 10mV		42		µs
		Overdrive = 100mV		33		
Rise Time	t <sub>Rise</sub>	Overdrive = 10mV, C <sub>L</sub> = 30pF, R <sub>L</sub> = 1MΩ		85		ns
		Overdrive = 100mV, C <sub>L</sub> = 30pF, R <sub>L</sub> = 1MΩ		85		
Fall Time	t <sub>Fall</sub>	Overdrive = 10mV, C <sub>L</sub> = 30pF, R <sub>L</sub> = 1MΩ		70		ns
		Overdrive = 100mV, C <sub>L</sub> = 30pF, R <sub>L</sub> = 1MΩ		60		

## TYPICAL PERFORMANCE CHARACTERISTICS

## Operational Amplifier Only



$T_A = +25^\circ\text{C}$ ,  $V_S = 1.4\text{V}$  to  $5\text{V}$ ,  $-V_S = \text{GND}$ ,  $V_{CM} = V_S/2$ ,  $V_{OUT} \approx V_S/2$  and  $R_L = 1\text{M}\Omega$  to  $V_S/2$ ,  $C_L = 60\text{pF}$ , unless otherwise noted.

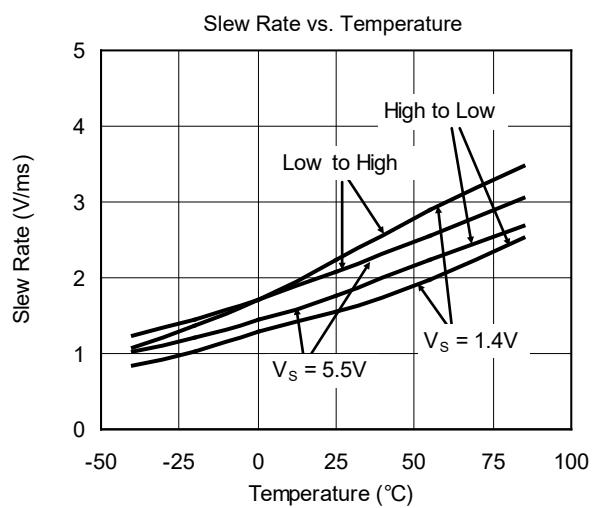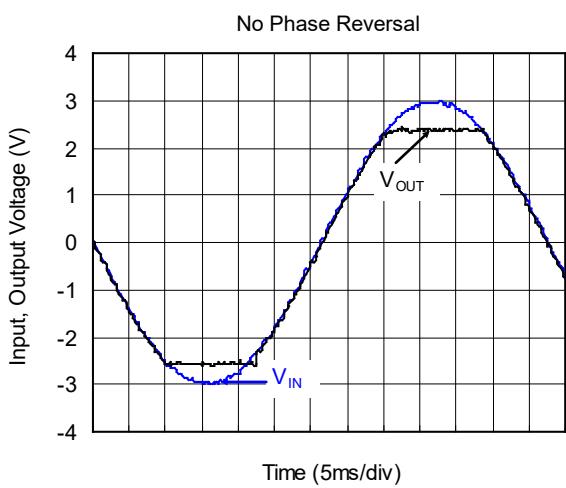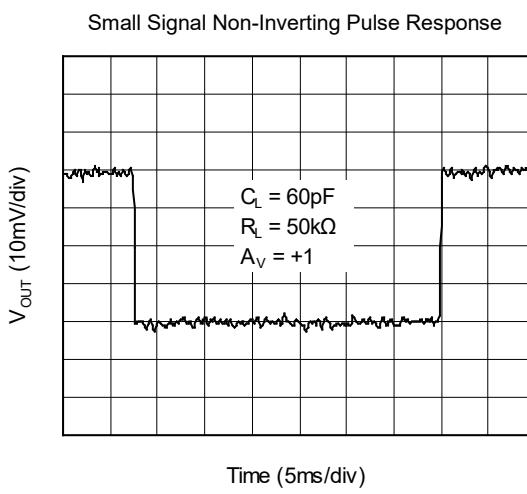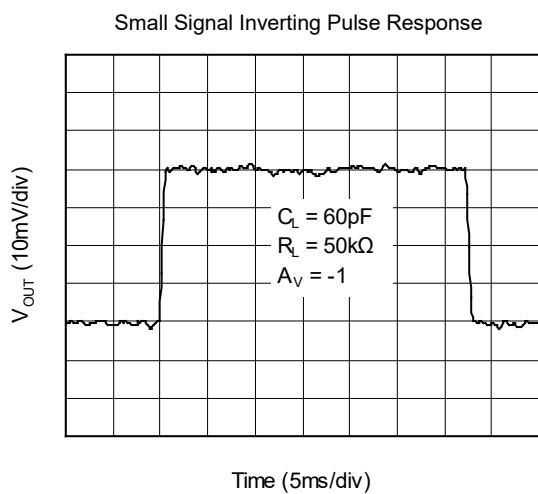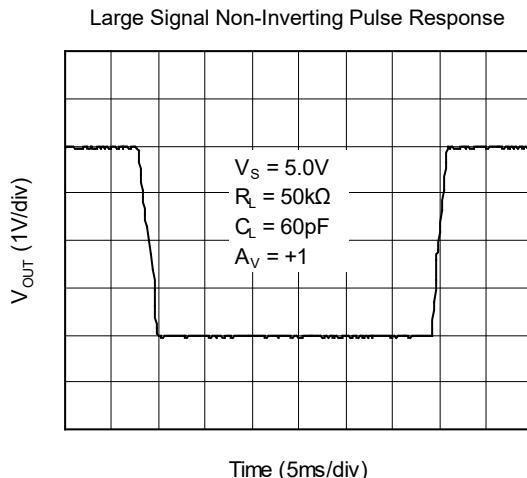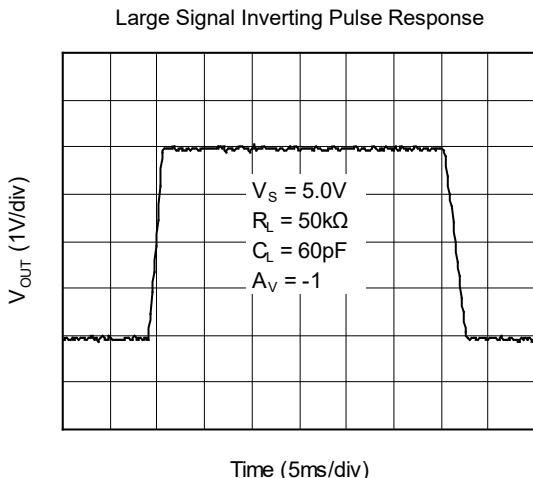



## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

## Operational Amplifier Only (continued)

$T_A = +25^\circ\text{C}$ ,  $V_S = 1.4\text{V}$  to  $5\text{V}$ ,  $-V_S = \text{GND}$ ,  $V_{CM} = V_S/2$ ,  $V_{OUT} \approx V_S/2$  and  $R_L = 1\text{M}\Omega$  to  $V_S/2$ ,  $C_L = 60\text{pF}$ , unless otherwise noted.





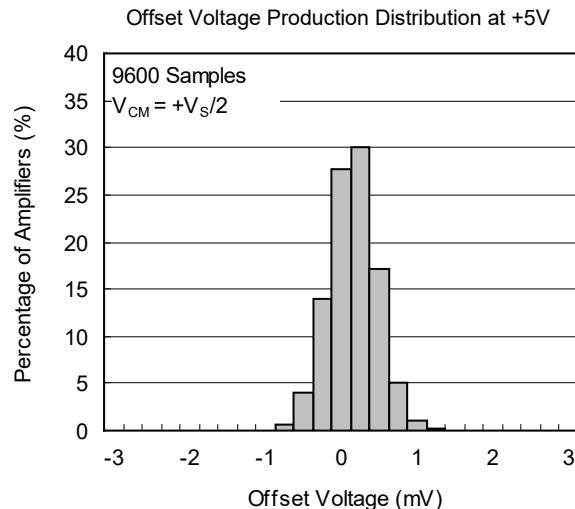
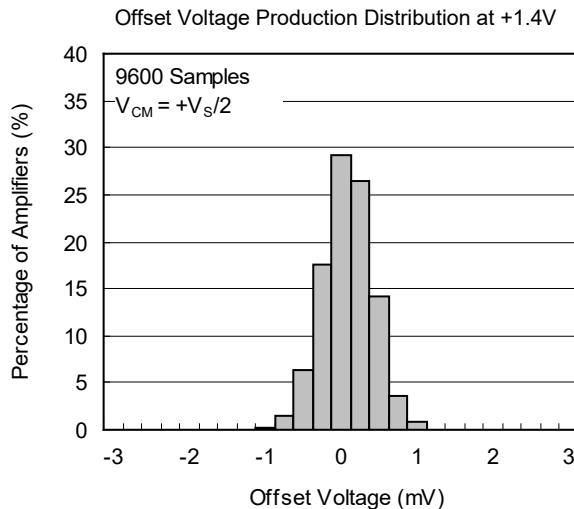


## Comparator Only

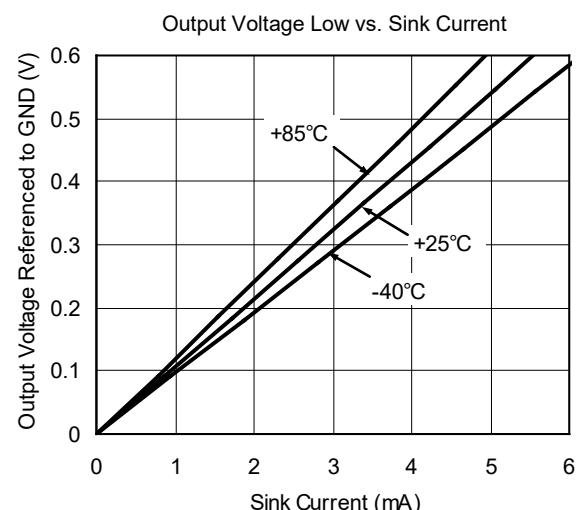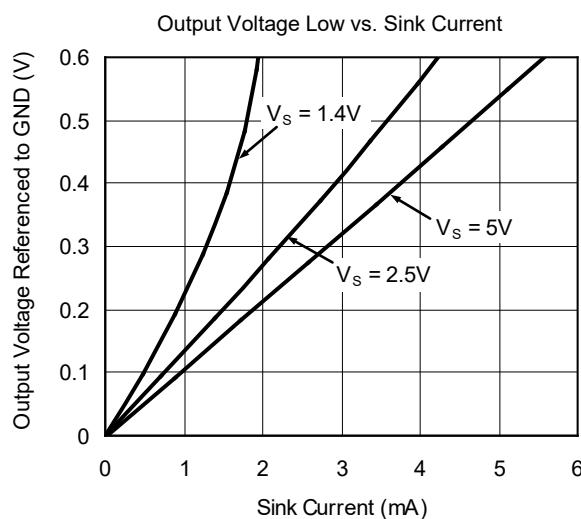







## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

## Comparator Only (continued)

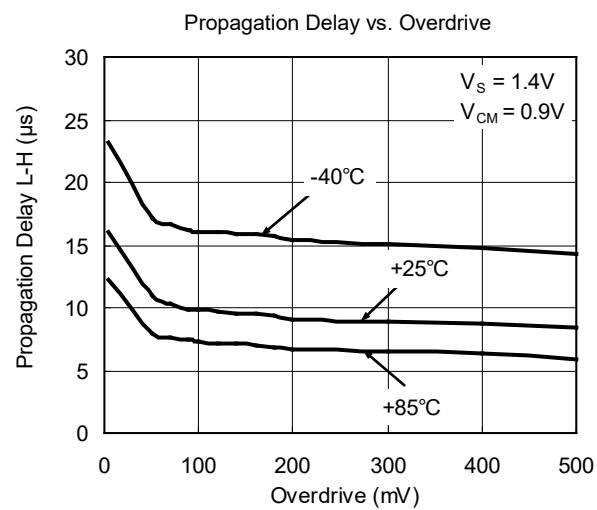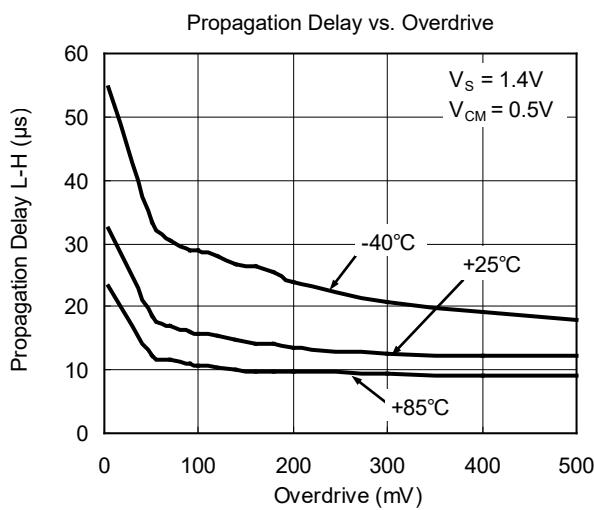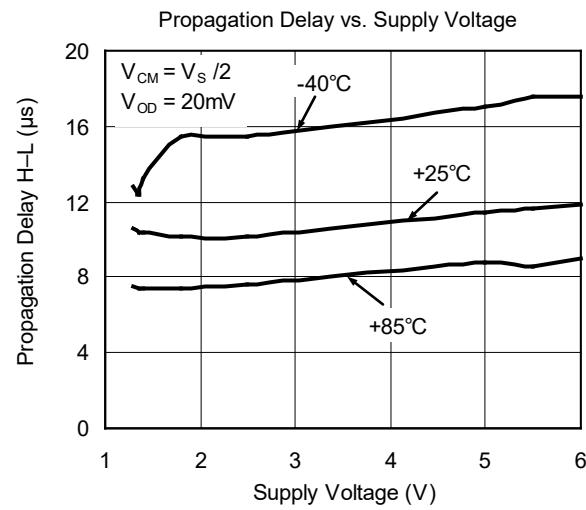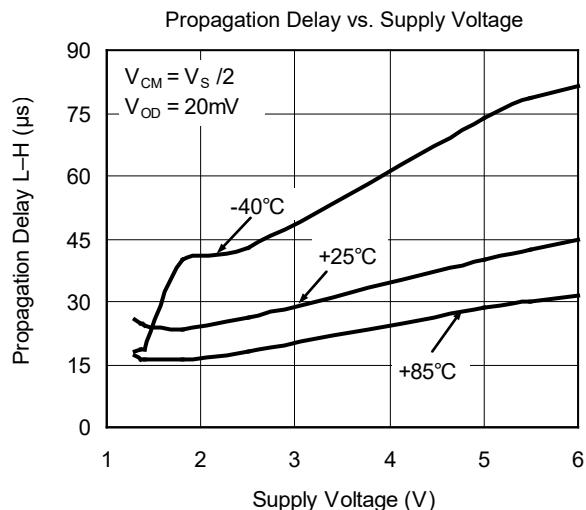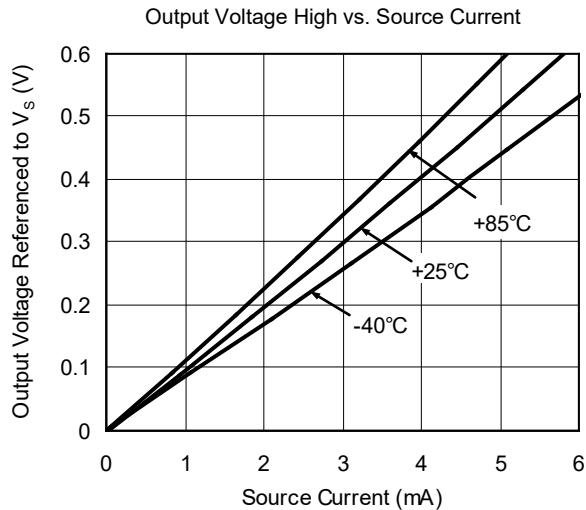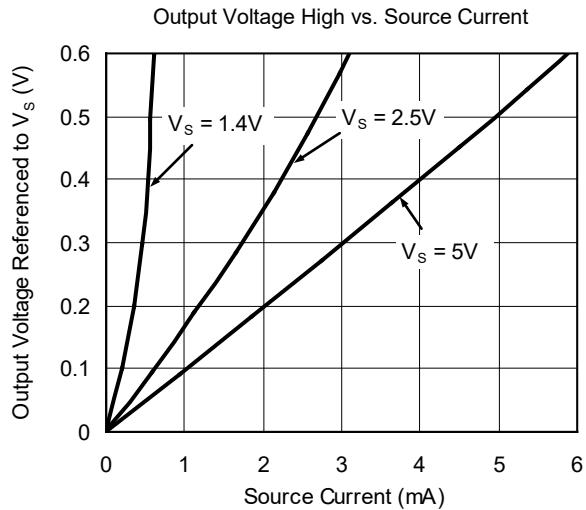







## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

## Comparator Only (continued)

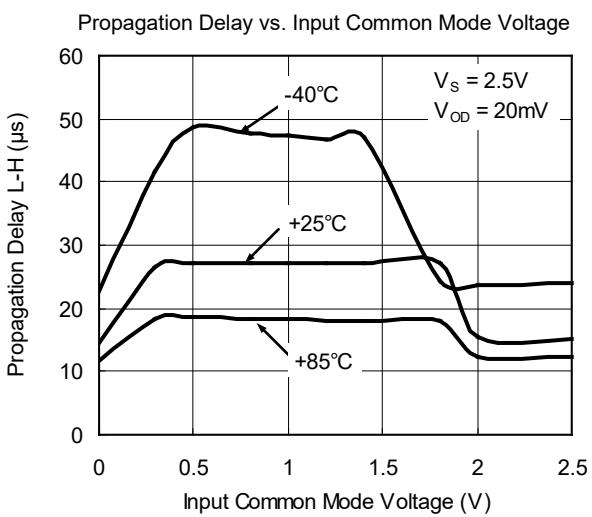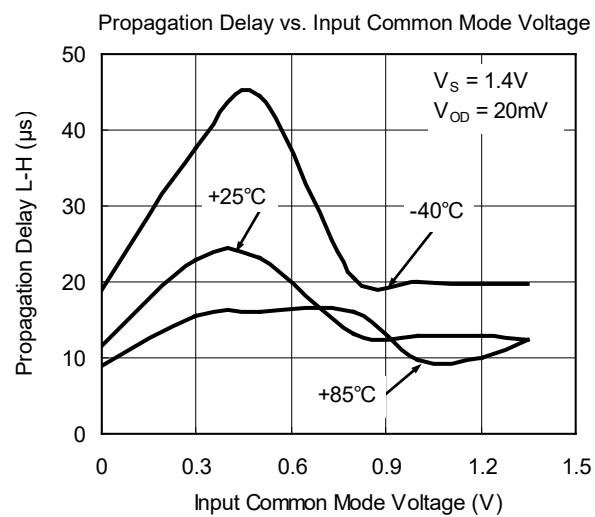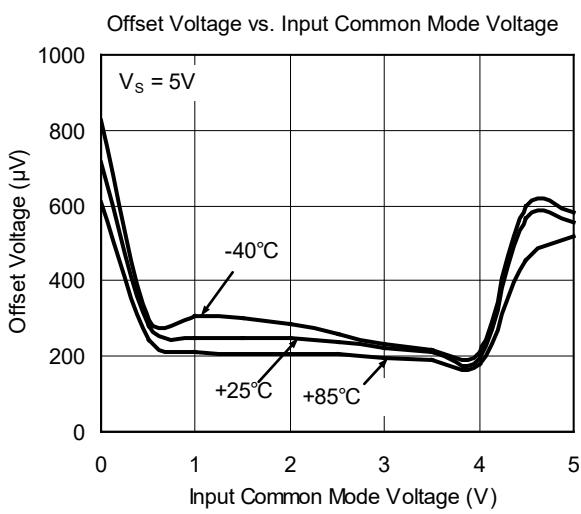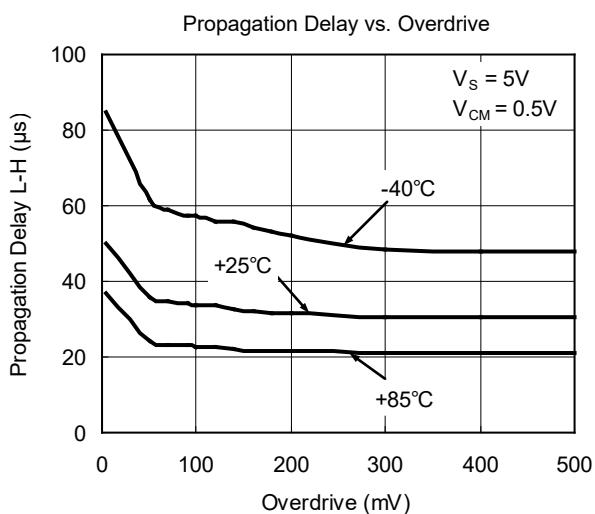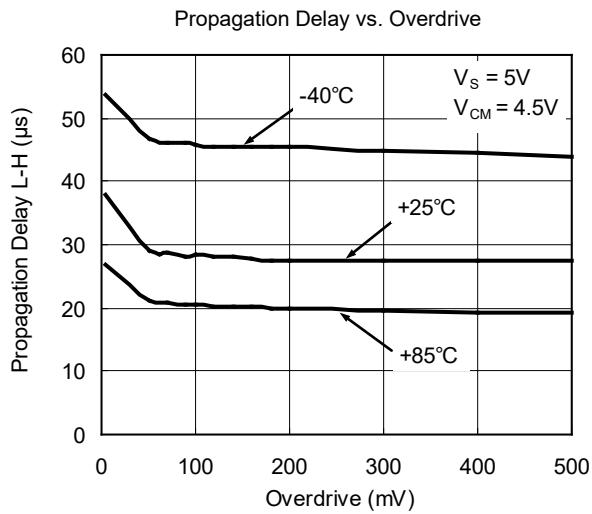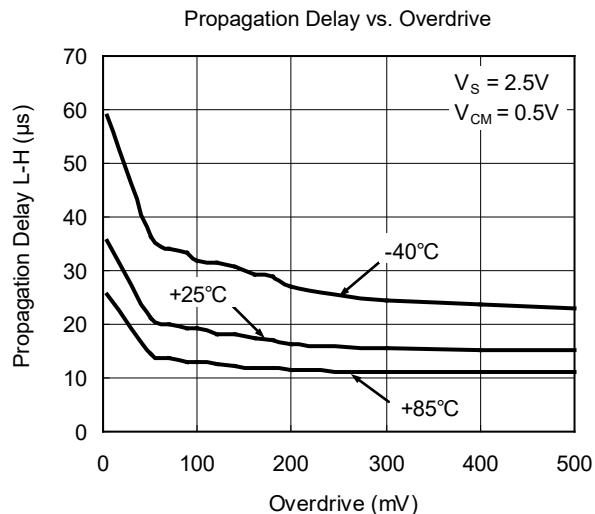

## TYPICAL PERFORMANCE CHARACTERISTICS (continued)

## Comparator Only (continued)

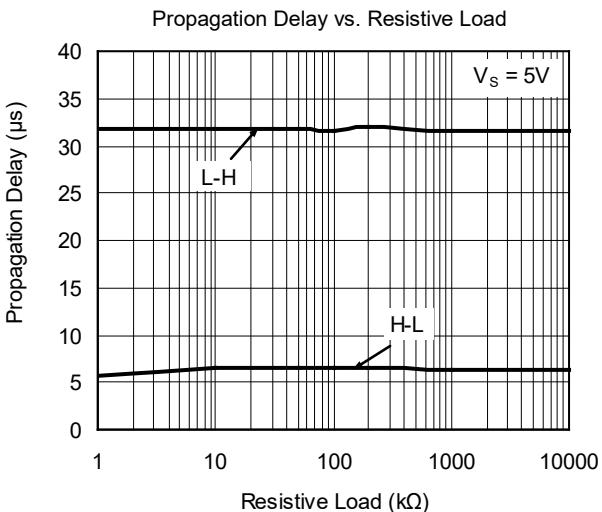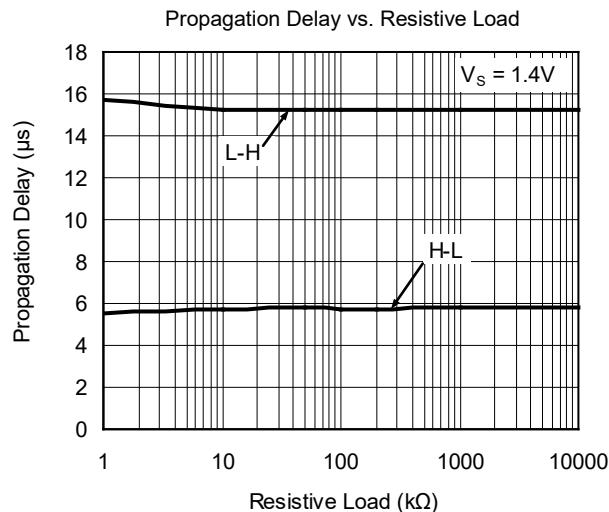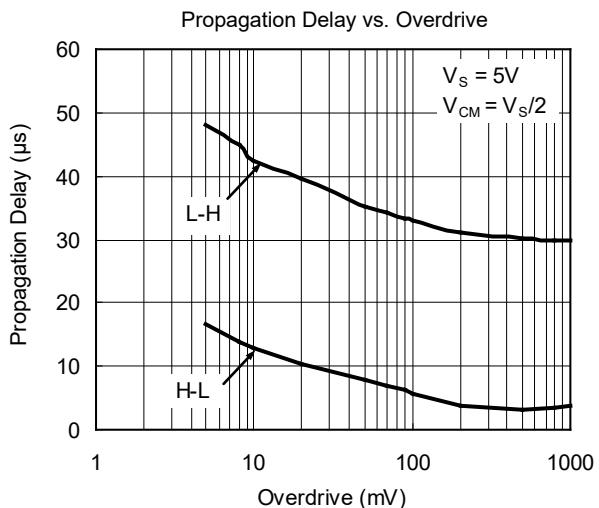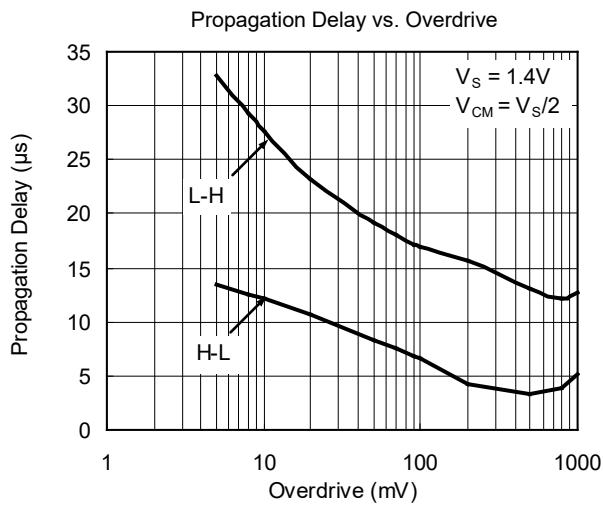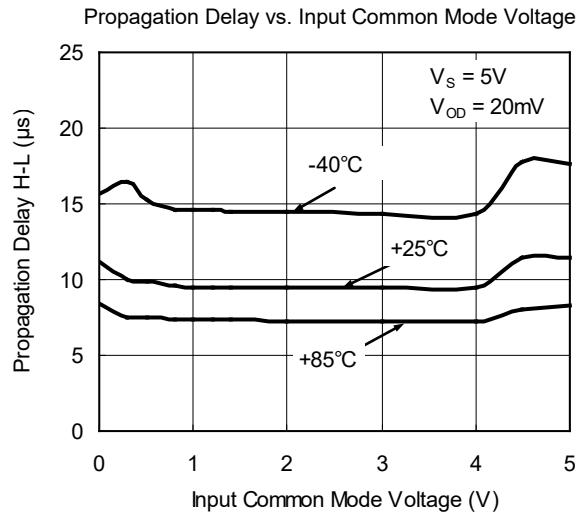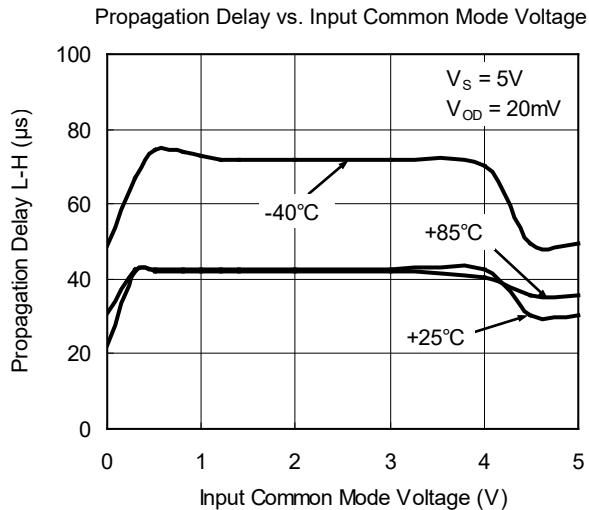

## APPLICATION CIRCUIT

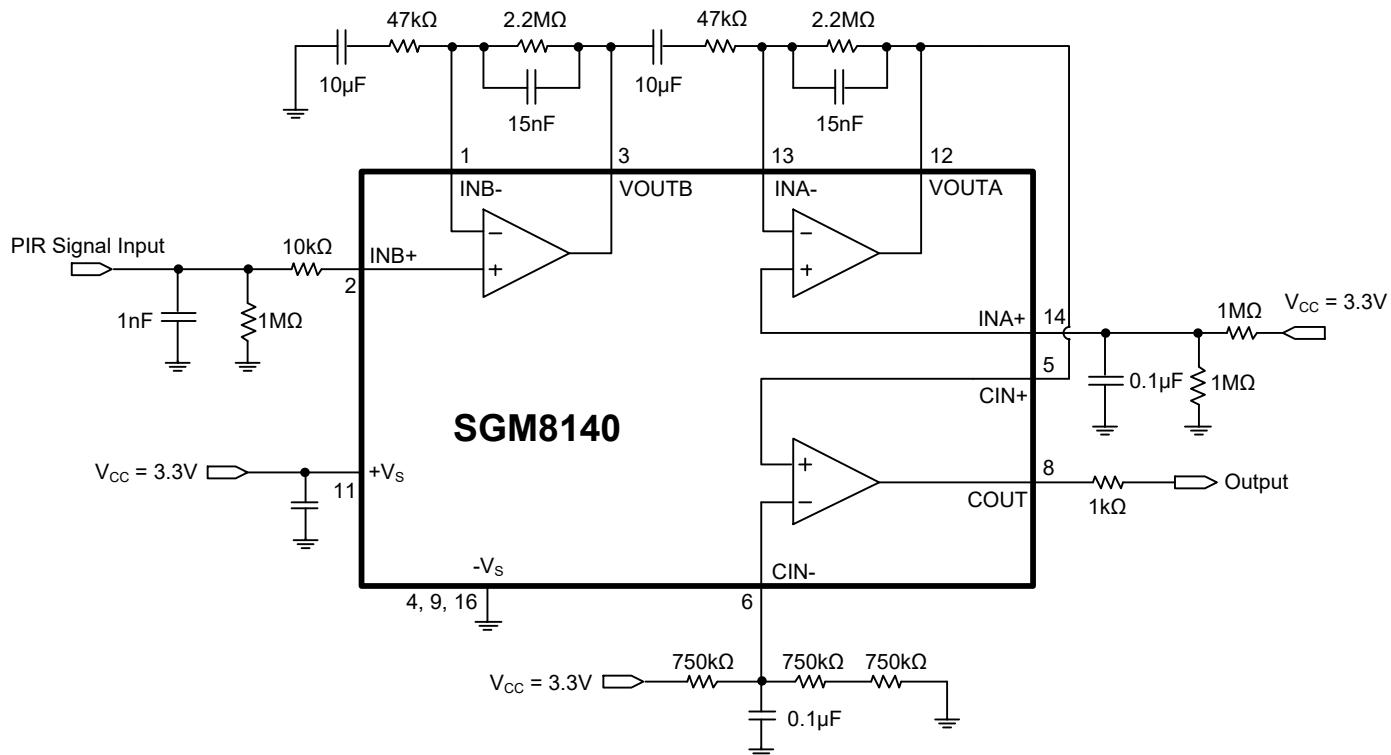


Figure 1. Application Circuit for PIR Sensor

## REVISION HISTORY


NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Original (NOVEMBER 2015) to REV.A	Page
Changed from product preview to production data.....	All

# PACKAGE INFORMATION

## PACKAGE OUTLINE DIMENSIONS

### TQFN-4x4-16L

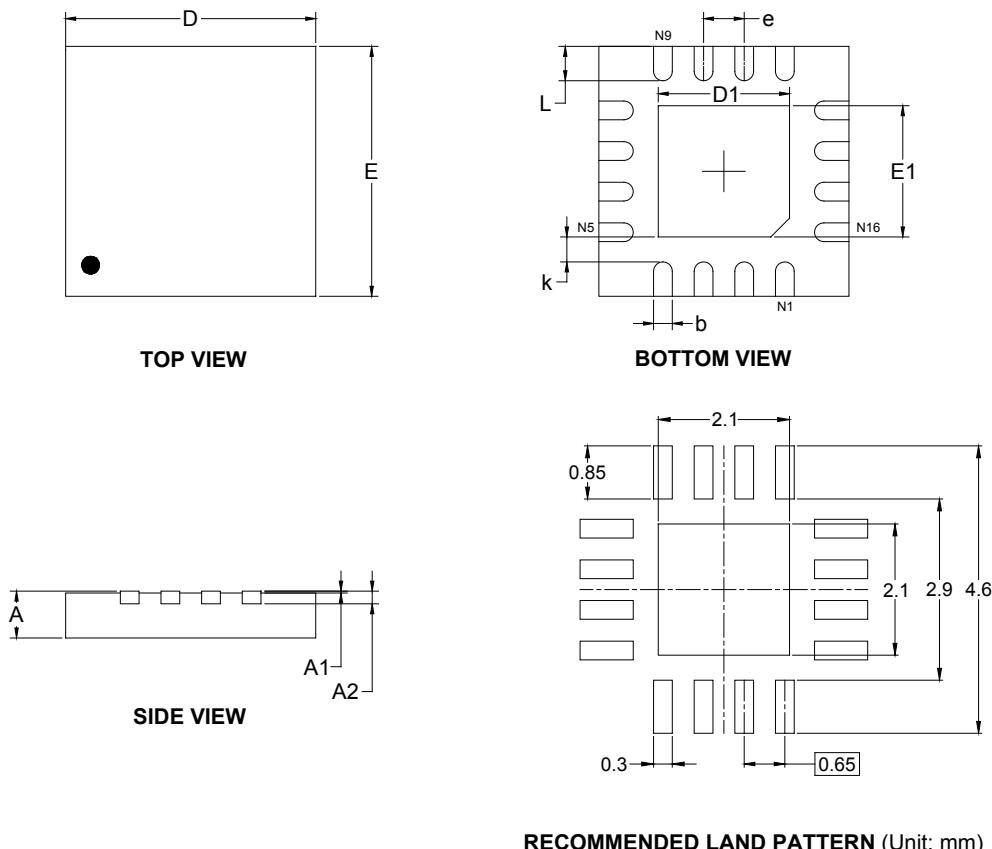


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A2	0.203 REF		0.008 REF	
D	3.900	4.100	0.154	0.161
D1	2.000	2.200	0.079	0.087
E	3.900	4.100	0.154	0.161
E1	2.000	2.200	0.079	0.087
k	0.200 MIN		0.008 MIN	
b	0.250	0.350	0.010	0.014
e	0.650 TYP		0.026 TYP	
L	0.450	0.650	0.018	0.026


# PACKAGE INFORMATION

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS

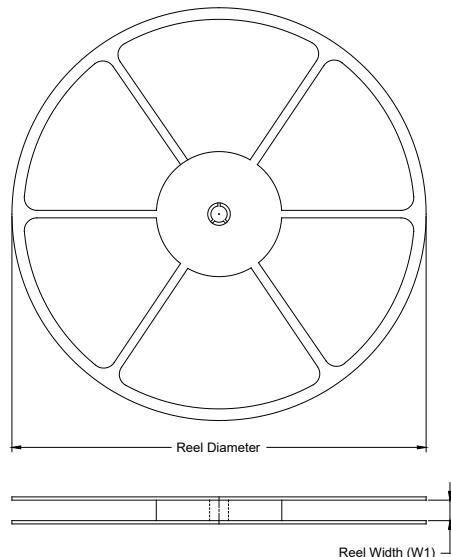

### TAPE DIMENSIONS

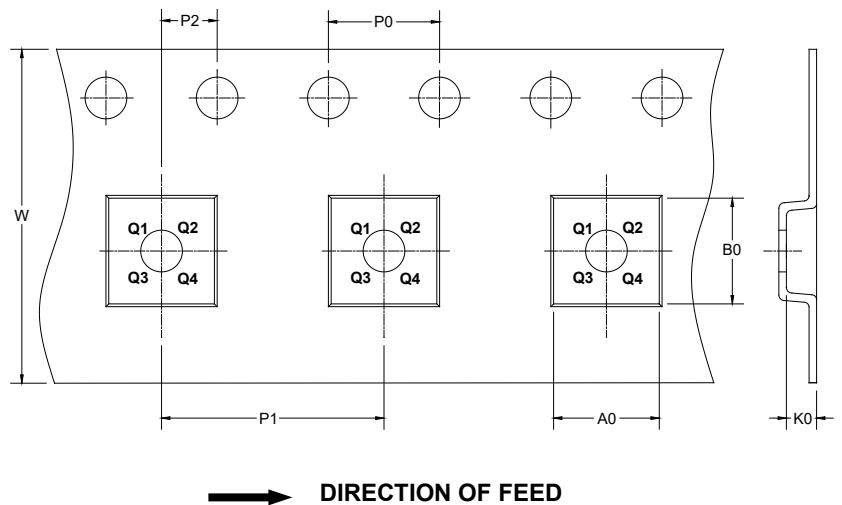


NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant	DD0001
TQFN-4x4-16L	13"	12.4	4.30	4.30	1.10	4.0	8.0	2.0	12.0	Q1	

## PACKAGE INFORMATION

### CARTON BOX DIMENSIONS

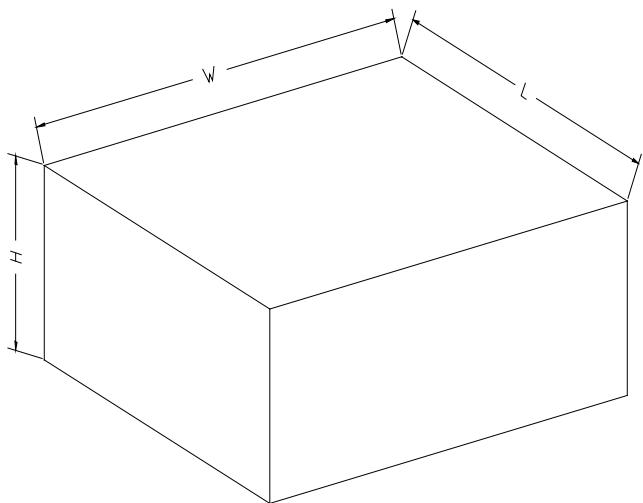

NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

00002