



SGM48536/SGM48537 SGM48538/SGM48539/SGM48540 Single High-Speed, Low-Side Gate Drivers with Negative Input Voltage Capability

GENERAL DESCRIPTION

The SGM48536/37/38/39/40 are single high-speed low-side gate drivers for MOSFET and IGBT power switches. These devices can provide rail-to-rail driving capability and very small propagation delays (18.5ns, TYP). They also provide 4A peak source current and 8A peak sink current (asymmetrical drive) when $V_{DD} = 12V$. The input can withstand a maximum negative voltage of -10V.

The operating voltage range is 9V to 25V. The devices feature under-voltage lockout (UVLO) function. After UVLO is triggered, the output remains low.

The SGM48536 adopts separate output architecture. The separate output structure with asymmetric drive improves the immunity of the device to the parasitic Miller conduction effect and reduces ground bounce.

The SGM48537 adopts a dual-input design. IN+ or IN- can independently control the output of the driver. The unused pin can be functioned as an enable control pin. In order to ensure that the output remains low when an input pin is floating, these input pins have internal pull-up and pull-down resistors.

The input thresholds of these devices are compatible with low voltage TTL and CMOS logic, which will not be affected by V_{DD} changes. A Schmitt trigger is used at the input, and a wide range of hysteresis voltage is designed to enhance the immunity.

The SGM48536 is available in a Green SOT-23-6 package. The SGM48537/38/39/40 are all available in a Green SOT-23-5 package.






FEATURES

- **Asymmetrical Drive**
 - ♦ 4A Peak Source Current
 - ♦ 8A Peak Sink Current
- **TTL and CMOS Compatible Logic Threshold**
- **Logic Levels Independent of Supply Voltage**
- **Hysteretic Input Logic for High Noise Immunity**
- **Outputs are Logic Low when Inputs are Floating**
- **Negative Voltage Handling Capability:**
 - ♦ -10V DC at Inputs
 - ♦ -2V, 200ns Pulse for Outputs
- **Glitch-Free Operation at Power-Up and Power-Down: Outputs are Pulled Low during Supply UVLO**
- **Fast Propagation Delay: 18.5ns (TYP)**
- **Fast Rise Time: 9.5ns (TYP)**
- **Fast Fall Time: 8ns (TYP)**
- **SGM48536 Separate Output Options Allow for Tuning of Turn-on and Turn-off Currents**
- **SGM48537 Dual Input Design (Choice of an Inverting (IN-) or Non-Inverting (IN+) Driver Configuration)**
 - ♦ **Unused Input Pin Can be Used for Enable or Disable Function**
- **Input Pin Absolute Maximum Voltage Levels Not Restricted by VDD Pin Bias Supply Voltage**
- **-40°C to +140°C Operating Junction Temperature Range**
- **Packaging:**
 - SGM48536 Available in a Green SOT-23-6 Package
 - SGM48537/38/39/40 Available in a Green SOT-23-5 Package

APPLICATIONS

Power MOSFETs
IGBT Driving for Power Supplies
DC/DC Converters
Solar Power, Motor Drivers

PIN CONFIGURATIONS

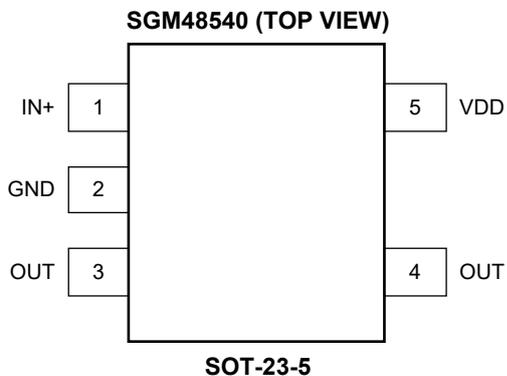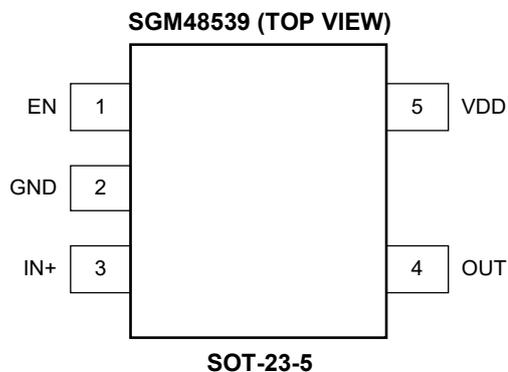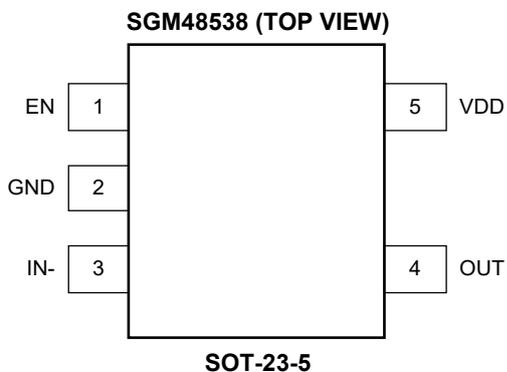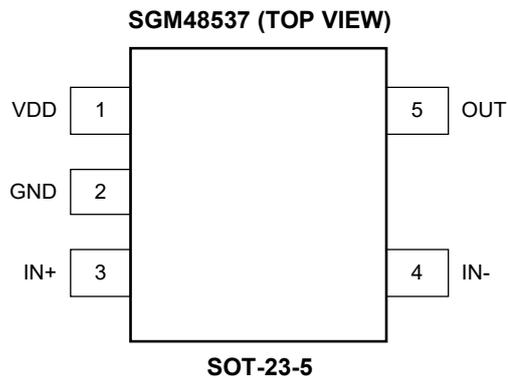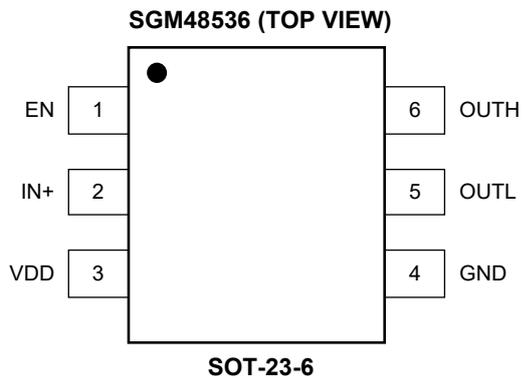

PIN DESCRIPTION



PIN					NAME	I/O	FUNCTION
SGM48536	SGM48537	SGM48538	SGM48539	SGM48540			
1	—	1	1	—	EN	I	Enable Input. Pull EN high or leave it floating to enable output. Pull EN low to disable output, ignoring input state.
2	3	—	3	1	IN+	I	Non-Inverting Input. OUT is logic low if IN+ is unbiased or left floating. For the SGM48537, when IN- is used as an inverting input, pull IN+ up to VDD to enable output. Inject PWM signal to this pin when the driver is used in non-inverting configuration.
—	4	3	—	—	IN-	I	Inverting Input. OUT is logic low if IN- is unbiased or left floating. For the SGM48537, when IN+ is used as a non-inverting input, pull IN- down to GND to enable output. Inject PWM signal to this pin when the driver is used in inverting configuration.
3	1	5	5	5	VDD	I	Power Supply Input.
4	2	2	2	2	GND	—	Ground. Reference pin for all signals.
5	—	—	—	—	OUTL	O	Driver Sink Current Output.
6	—	—	—	—	OUTH	O	Driver Source Current Output.
—	5	4	4	3, 4	OUT	O	Driver Source/Sink Current Output.

NOTE: I: input, O: output.



PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS

SOT-23-5

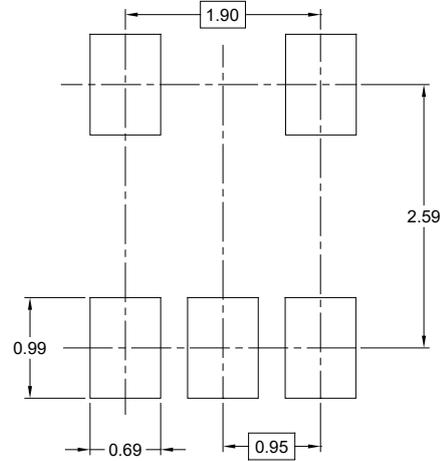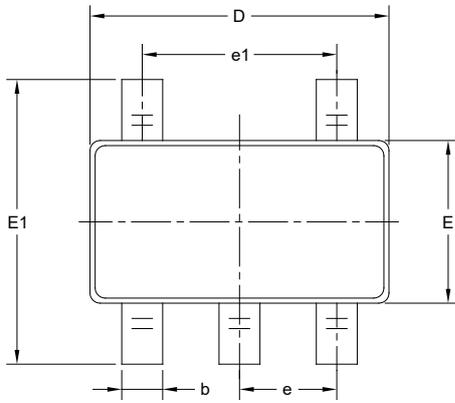

RECOMMENDED LAND PATTERN (Unit: mm)

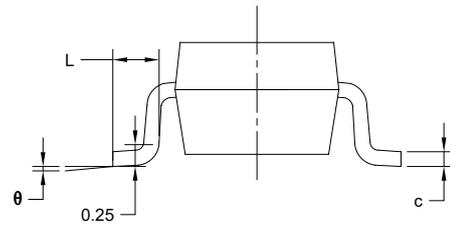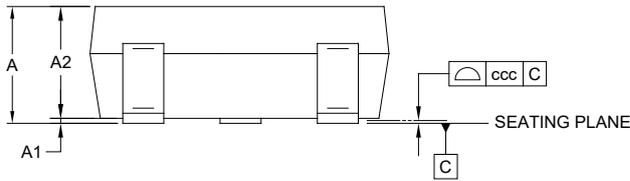



Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	-	-	1.450
A1	0.000	-	0.150
A2	0.900	-	1.300
b	0.300	-	0.500
c	0.080	-	0.220
D	2.750	-	3.050
E	1.450	-	1.750
E1	2.600	-	3.000
e	0.950 BSC		
e1	1.900 BSC		
L	0.300	-	0.600
θ	0°	-	8°
ccc	0.100		

NOTES:


1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-178.

PACKAGE OUTLINE DIMENSIONS

SOT-23-6

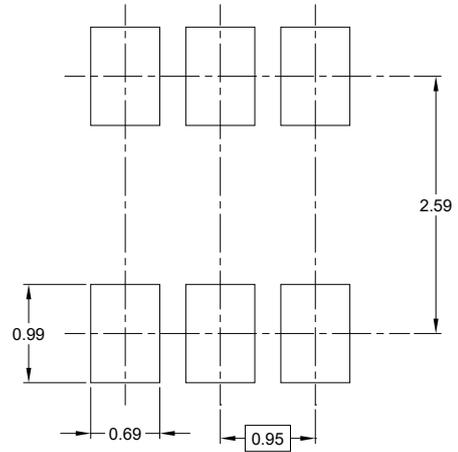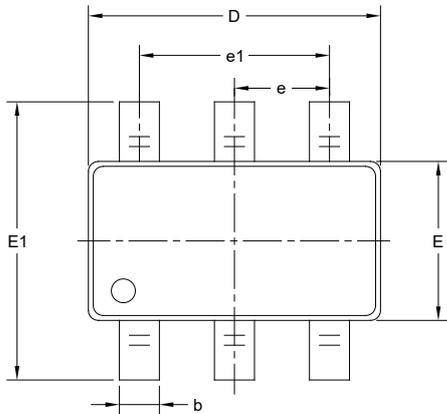

RECOMMENDED LAND PATTERN (Unit: mm)

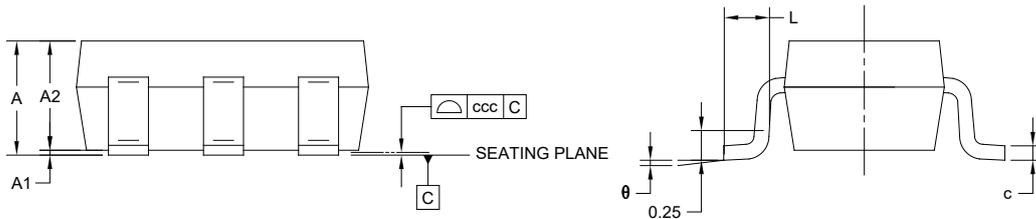

Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	-	-	1.450
A1	0.000	-	0.150
A2	0.900	-	1.300
b	0.300	-	0.500
c	0.080	-	0.220
D	2.750	-	3.050
E	1.450	-	1.750
E1	2.600	-	3.000
e	0.950 BSC		
e1	1.900 BSC		
L	0.300	-	0.600
θ	0°	-	8°
ccc	0.100		


NOTES:

1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-178.


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

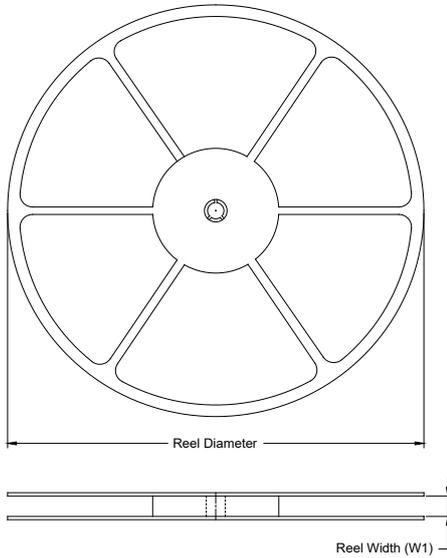

TAPE DIMENSIONS

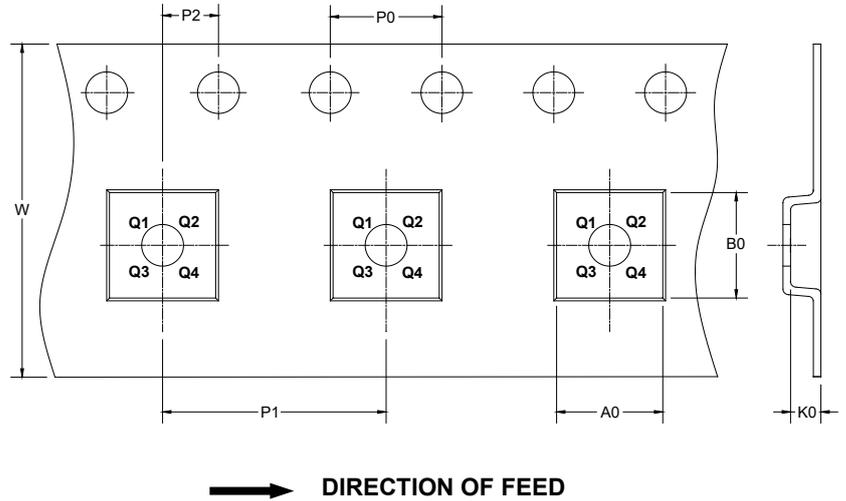

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23-5	7"	9.5	3.20	3.20	1.40	4.0	4.0	2.0	8.0	Q3
SOT-23-6	7"	9.5	3.23	3.17	1.37	4.0	4.0	2.0	8.0	Q3

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

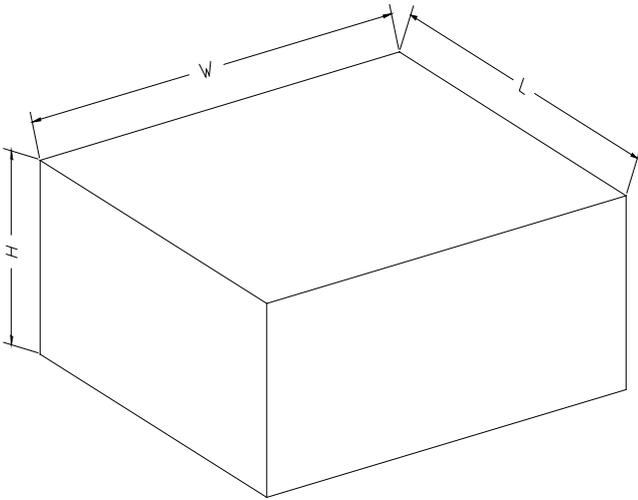

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002