

GENERAL DESCRIPTION

The SGM6332 is a current-mode buck converter with an internal power MOSFET switch. This device has a fixed switching frequency of 1.4MHz. It can efficiently provide up to 3A output load current over a wide input supply range from 4.5V to 18V with excellent load and line regulation responses.

In addition, the SGM6332 is an efficient, 91% peak efficiency when the device is in operation. The shutdown supply current consumed is less than 18 μ A. Protection features include cycle-by-cycle current limit and thermal shutdown. The device also includes an internal soft-start and an external adjustable soft-start function to limit the inrush current and prevent the overshoot of output voltage.

The SGM6332 is available in a Green SOIC-8 (Exposed Pad) package and also minimizes the external components of the device to complete a 3A buck DC/DC converter solution.

FEATURES

- 4.5V to 18V Input Voltage Range
- 0.8V to 14V Adjustable Output Voltage Range
- 3A Output Current
- High Efficiency: Up to 91%
- Shutdown Supply Current: 18 μ A (MAX)
- 100m Ω Internal Power MOSFET Switch
- 1.4MHz Fixed Switching Frequency
- Cycle-by-Cycle Current Limit Protection
- Thermal Shutdown Protection
- Under-Voltage Lockout
- Support Low ESR Ceramic Capacitors
- -40°C to +85°C Operating Temperature Range
- Available in a Green SOIC-8 (Exposed Pad) Package

APPLICATIONS

Battery Chargers
Flat Panel TVs
Set-Top Boxes
Cigarette Lighter Powered Devices
Pre-Regulators

TYPICAL APPLICATION

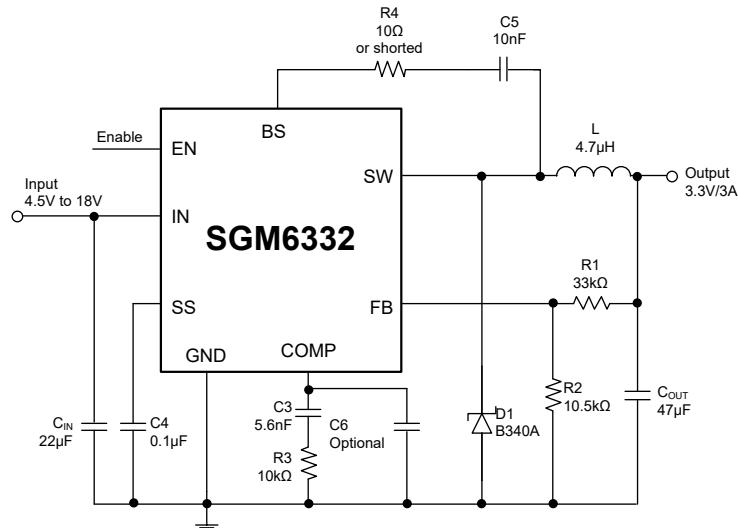



Figure 1. Typical Application Circuit

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM6332	SOIC-8 (Exposed Pad)	-40°C to +85°C	SGM6332YPS8G/TR	SGM 6332YPS8 XXXXX	Tape and Reel, 2500

MARKING INFORMATION

NOTE: XXXXX = Date Code and Vendor Code.

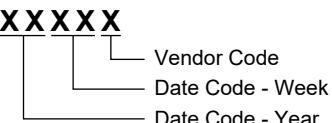

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V_{IN}	-0.3V to 20V
SW Voltage, V_{SW}	-0.5V to V_{IN} + 0.3V
Boost Voltage, V_{BS}	V_{SW} - 0.3V to V_{SW} + 6V
All Other Pins.....	-0.3V to 6V
Package Thermal Resistance	
SOIC-8 (Exposed Pad), θ_{JA}	50°C/W
Junction Temperature.....	+150°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10s)	+260°C
ESD Susceptibility	
HBM.....	4000V
MM.....	250V

RECOMMENDED OPERATING CONDITIONS

Operating Temperature Range -40°C to +85°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATION

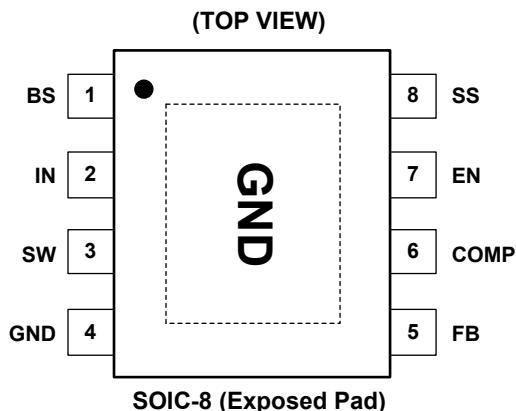

PIN DESCRIPTION







PIN	NAME	FUNCTION
1	BS	High-side Gate Drive Boost Input. A 10Ω resistor placed between SW and BS cap is strongly recommended to reduce SW spike voltage.
2	IN	Power Input. This pin powers the device and step-down converter switches. A large enough capacitor is used to bypass this pin to GND to eliminate input's noise.
3	SW	Power Switching Output. Place a capacitor between SW and BS to supply the high-side switch.
4	GND	Ground. (Exposed pad is connected to the backside of GND)
5	FB	Feedback Input. Connect to the resistor divider between output and ground to set output voltage.
6	COMP	Compensation Node for regulation control loop compensation. An additional capacitor between COMP and GND may be needed.
7	EN	Enable Input for regulator's turn-on or turn-off. Drive EN high to turn on the regulator, and drive EN low to turn it off. Output voltage is discharged when the IC is off. EN is disconnected in automatic startup.
8	SS	Soft-Start Control Input. A capacitor is placed between SS and GND to set the soft-start period. Disconnect the SS to disable the soft-start function.
Exposed Pad	GND	Power Ground Exposed Pad. Must be connected to GND plane.

ELECTRICAL CHARACTERISTICS(V_{IN} = 12V, T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Voltage Range	V _{IN}		4.5		18	V
Feedback Voltage	V _{FB}		0.776	0.8	0.824	V
Shutdown Supply Current	I _{SHDN}	V _{EN} = 0V		10	18	µA
Quiescent Supply Current	I _Q	V _{EN} = 2.6V, V _{FB} = 1.0V		0.8	1.7	mA
High-side Switch (M1) On-Resistance	R _{ONH}			100		mΩ
Low-side Switch (M2) On-Resistance	R _{ONL}			10		Ω
Error Amplifier Transconductance	G _{EA}	ΔV _{FB} = ±12.5mV	500	800	1120	µA/V
Error Amplifier Voltage Gain	A _{EA}			10000		V/V
SW Leakage Current	I _{LSW}	V _{EN} = 0V, V _{SW} = 0V			1	µA
Current Limit	I _{LIM}			4.2		A
Current Sense to COMP Transconductance	G _{CS}			6.2		A/V
Maximum Duty Cycle	D _{MAX}	V _{FB} = 0.6V		80		%
Minimum Duty Cycle	D _{MIN}	V _{FB} = 1V		0		%
EN Threshold Voltage	V _{TH}		1.2			V
EN Threshold Voltage	V _{TL}				0.4	V
EN Pull-Up Current		V _{EN} = 0V	0.8	1.4	2	µA
Oscillator Frequency	f _{OSC}		1.15	1.4	1.6	MHz
Short-Circuit Oscillator Frequency		V _{FB} = 0V		140		kHz
Under-Voltage Lockout Threshold		V _{IN} Rising	3.5	3.8	4.2	V
Under-Voltage Lockout Threshold Hysteresis				230		mV
Soft-Start Period		C _{SS} = 0.1µF		10		ms
Thermal Shutdown Temperature	T _{SHDN}			160		°C

TYPICAL PERFORMANCE CHARACTERISTICS


$V_{IN} = 12V$, $C_{IN} = 22\mu F$, $C_{OUT} = 47\mu F$ and $T_A = +25^{\circ}C$, unless otherwise noted.

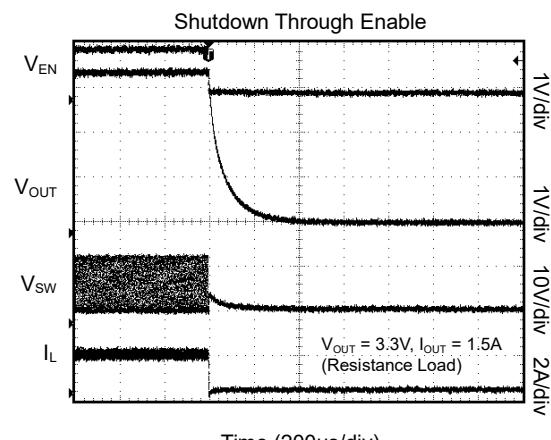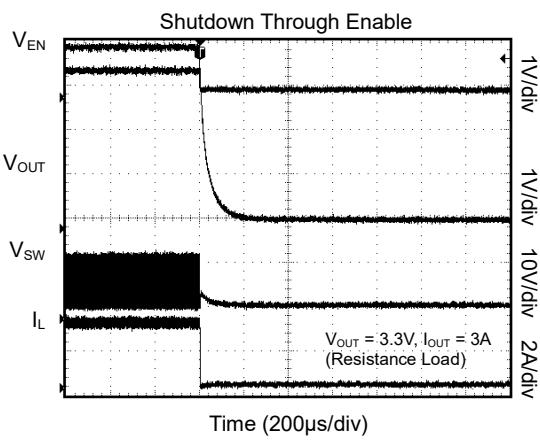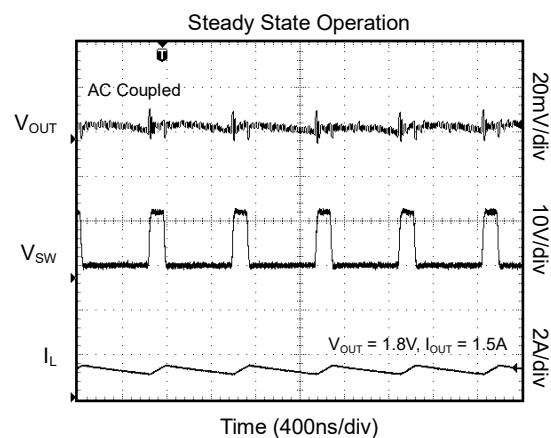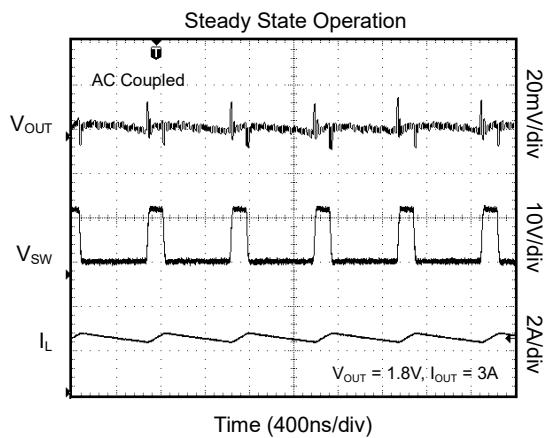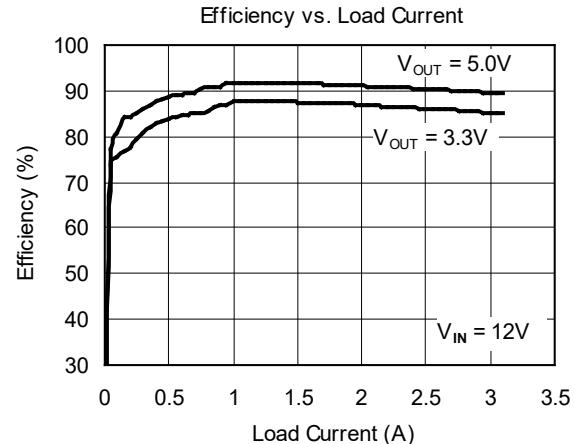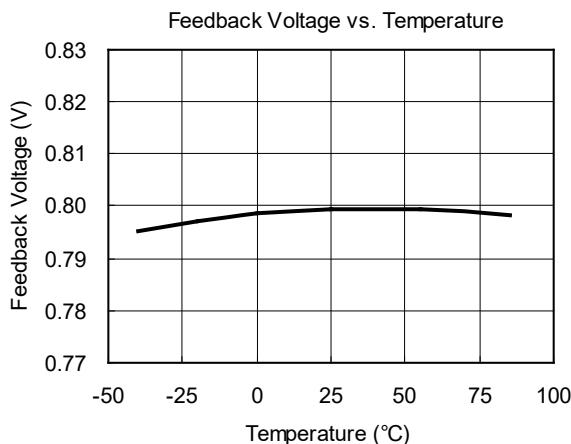


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$V_{IN} = 12V$, $C_{IN} = 22\mu F$, $C_{OUT} = 47\mu F$ and $T_A = +25^{\circ}C$, unless otherwise noted.


Startup through Enable

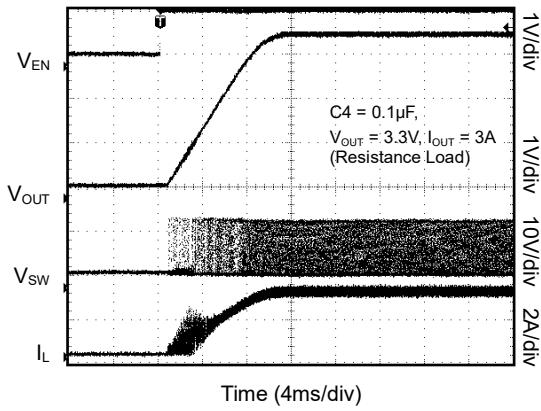


Startup through Enable

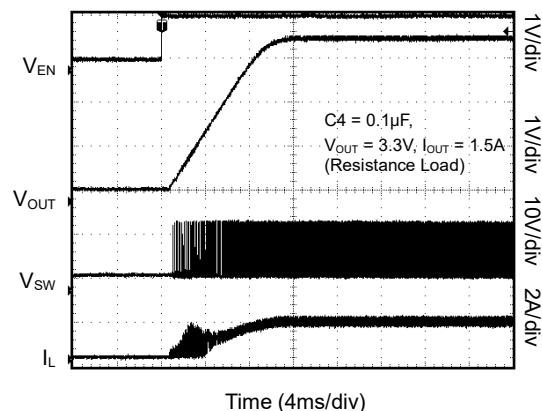


Startup through Enable

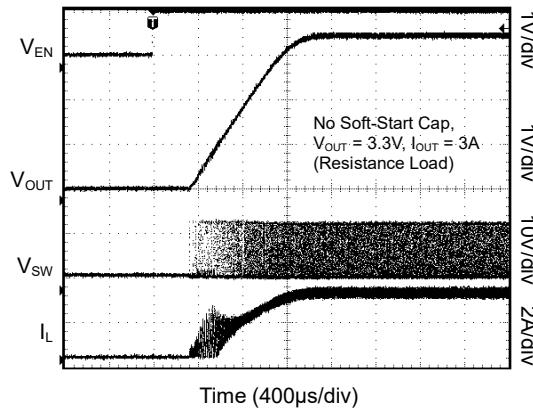

Startup through Enable

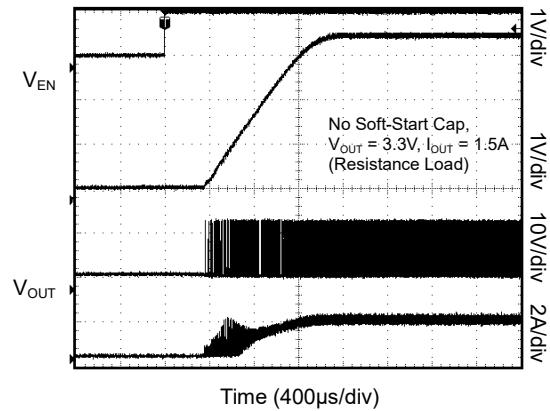

Load Transient Response

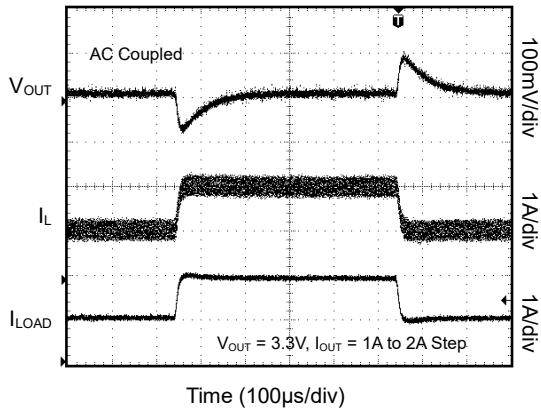

REVISION HISTORY





NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

JULY 2015 – REV.A.4 to REV.B	Page
Changed Typical Application and Input Capacitor.....	1, 8
JULY 2014 – REV.A.3 to REV.A.4	Page
Added a 10Ω resistor between SW and BS pin in application circuit	1, 3, 10
APRIL 2014 – REV.A.2 to REV.A.3	Page
Updated typical application, shutdown supply current and electrical characteristics	1, 4
JANUARY 2013 – REV.A.1 to REV.A.2	Page
Updated Soft-Start section.....	7
NOVEMBER 2012 – REV.A to REV.A.1	Page
Updated Electrical Characteristic section.....	4
Changes from Original (OCTOBER 2012) to REV.A	Page
Changed from product preview to production data.....	All

PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS

SOIC-8 (Exposed Pad)

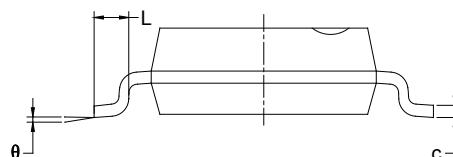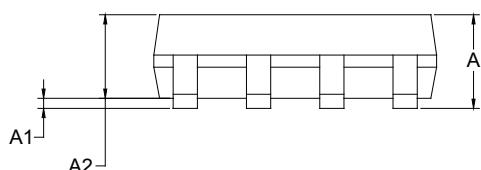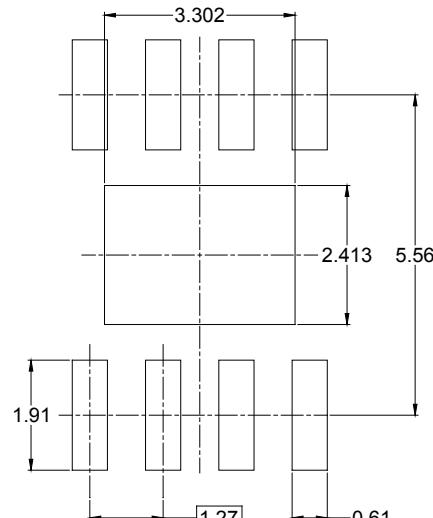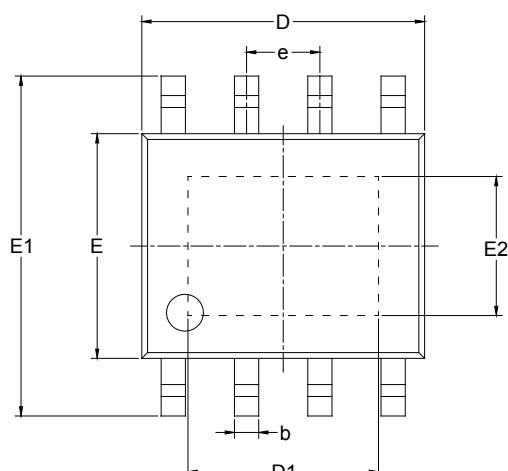


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A		1.700		0.067
A1	0.000	0.100	0.000	0.004
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.007	0.010
D	4.700	5.100	0.185	0.201
D1	3.202	3.402	0.126	0.134
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
E2	2.313	2.513	0.091	0.099
e	1.27 BSC		0.050 BSC	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

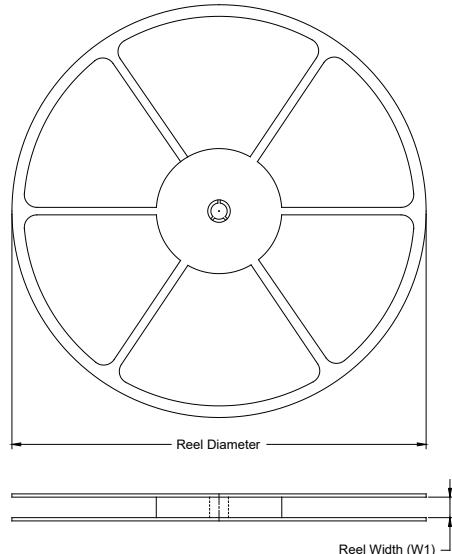

TAPE DIMENSIONS

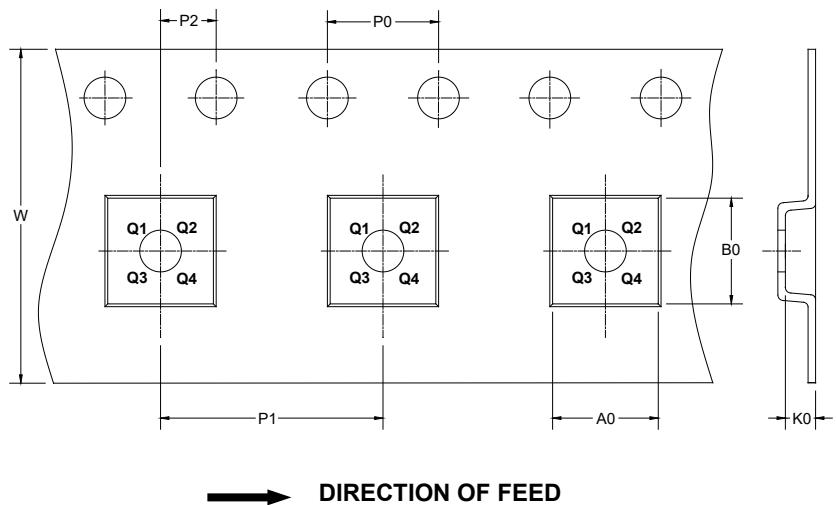

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOIC-8 (Exposed Pad)	13"	12.4	6.40	5.40	2.10	4.0	8.0	2.0	12.0	Q1

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

00002