

GENERAL DESCRIPTION

The SGM2086 is an ultra-low noise, high PSRR and low dropout voltage linear regulator. It capable of supplying 500mA output current with typical dropout voltage of 260mV. The operating input voltage range is from 2V to 5.5V and output voltage range is from 0.8V to 5.0V.

Other features include 1.2V logic-controlled shutdown mode, under-voltage lockout, current limit and thermal shutdown protection. The SGM2086 has automatic discharge function to quickly discharge V_{OUT} in the disabled status.

The SGM2086 is available in a Green SOT-23-5 package. It operates over an operating temperature range of -40°C to $+125^{\circ}\text{C}$.


APPLICATIONS

General Purpose Industrial
Camera Modules
Instrumentation
Measuring Equipment


FEATURES

- Operating Input Voltage Range: 2V to 5.5V
- Enable Pin Accept Voltages Higher than the Supply Voltage and up to 5.5V
- Fixed Output from 1.2V to 4.2V
- Adjustable Output from 0.8V to 5.0V
- 500mA Output Current
- Output Voltage Accuracy: $\pm 1\%$ at $+25^{\circ}\text{C}$
- Low Quiescent Current: 30 μA (TYP)
- Low Dropout Voltage: 260mV(TYP) at 500mA
- Power Supply Rejection Ratio:
 - SGM2086-ADJ:
 - ♦ 72dB (TYP) at 1kHz
 - ♦ 47dB (TYP) at 1MHz
 - SGM2086-1.8:
 - ♦ 70dB (TYP) at 1kHz
 - ♦ 61dB (TYP) at 1MHz
- Current Limiting and Thermal Protection
- Low Start-Up Current
- UVLO with Hysteresis
- Supports 1.2V Logic Enable Input for ON/OFF Control
- With Output Automatic Discharge
- Stable with Small Case Size Ceramic Capacitors
- -40°C to $+125^{\circ}\text{C}$ Operating Temperature Range
- Available in a Green SOT-23-5 Package

TYPICAL APPLICATION

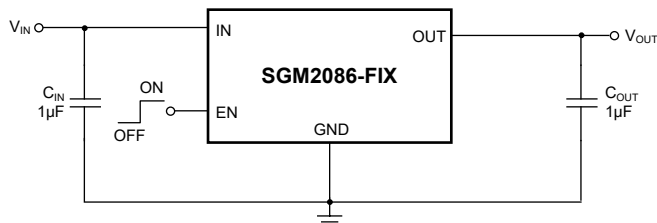

Fixed Voltage Typical Application Circuit

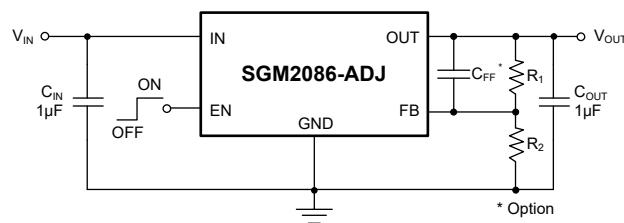

Adjustable Voltage Typical Application Circuit


Figure 1. Typical Application Circuits

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM2086-1.2	SOT-23-5	-40°C to +125°C	SGM2086-1.2XN5G/TR	1J3 XXXXX	Tape and Reel, 3000
SGM2086-1.5	SOT-23-5	-40°C to +125°C	SGM2086-1.5XN5G/TR	29I XXXXX	Tape and Reel, 3000
SGM2086-1.8	SOT-23-5	-40°C to +125°C	SGM2086-1.8XN5G/TR	1J4 XXXXX	Tape and Reel, 3000
SGM2086-2.5	SOT-23-5	-40°C to +125°C	SGM2086-2.5XN5G/TR	29J XXXXX	Tape and Reel, 3000
SGM2086-2.8	SOT-23-5	-40°C to +125°C	SGM2086-2.8XN5G/TR	29K XXXXX	Tape and Reel, 3000
SGM2086-2.9	SOT-23-5	-40°C to +125°C	SGM2086-2.9XN5G/TR	29L XXXXX	Tape and Reel, 3000
SGM2086-3.0	SOT-23-5	-40°C to +125°C	SGM2086-3.0XN5G/TR	29M XXXXX	Tape and Reel, 3000
SGM2086-3.3	SOT-23-5	-40°C to +125°C	SGM2086-3.3XN5G/TR	1J5 XXXXX	Tape and Reel, 3000
SGM2086-4.2	SOT-23-5	-40°C to +125°C	SGM2086-4.2XN5G/TR	29N XXXXX	Tape and Reel, 3000
SGM2086-ADJ	SOT-23-5	-40°C to +125°C	SGM2086-ADJXN5G/TR	1J2 XXXXX	Tape and Reel, 3000

MARKING INFORMATION

NOTE: XXXXX = Date Code, Trace Code and Vendor Code.

XXXXX

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

IN to GND	-0.3V to 6V
OUT to GND	-0.3V to 6V
EN to GND	-0.3V to 6V
Package Thermal Resistance	
SOT-23-5, θ_{JA}	179.7°C/W
SOT-23-5, θ_{JB}	45.6°C/W
SOT-23-5, θ_{JC}	66.5°C/W
Junction Temperature	+150°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10s)	+260°C
ESD Susceptibility ^{(1) (2)}	
HBM	±8000V
CDM	±1000V

NOTES:

1. For human body model (HBM), all pins comply with ANSI/ESDA/JEDEC JS-001 specifications.
2. For charged device model (CDM), all pins comply with ANSI/ESDA/JEDEC JS-002 specifications.

RECOMMENDED OPERATING CONDITIONS

Operating Input Voltage Range, V _{IN}	2V to 5.5V
Adjustable Output Voltage Range	0.8V to 5.0V
Enable Voltage Range	0V to 5.5V
Input Effective Capacitance, C _{IN}	0.5μF (MIN)
Output Effective Capacitance, C _{OUT}	0.5μF to 100μF
Operating Junction Temperature Range	-40°C to +125°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATIONS

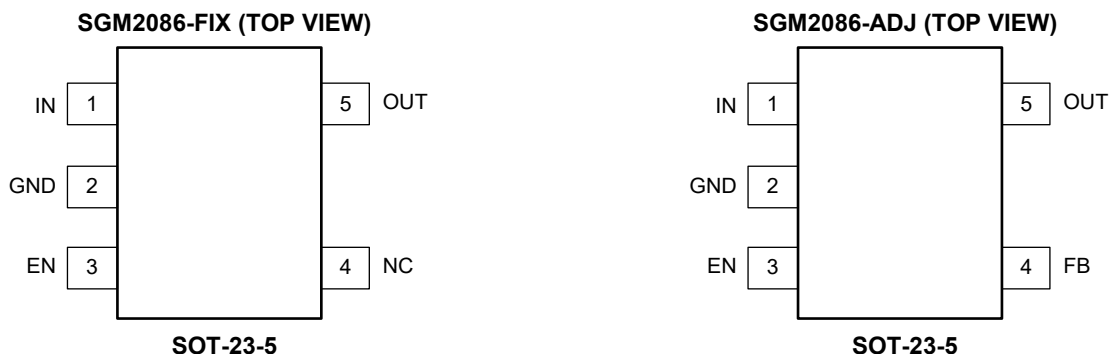

PIN DESCRIPTION

PIN	NAME	FUNCTION
1	IN	Input Supply Voltage Pin. It is recommended to use a 1 μ F or larger ceramic capacitor from IN pin to ground to get good power supply decoupling. This ceramic capacitor should be placed as close as possible to IN pin.
2	GND	Ground Pin.
3	EN	Enable Pin. Drive EN high to turn on the regulator. Drive EN low to turn off the regulator.
4	FB	Feedback Voltage Input Pin (adjustable voltage version only). Connect this pin to the midpoint of an external resistor divider to adjust the output voltage. Place the resistors as close as possible to this pin.
	NC	No Connection (fixed voltage version).
5	OUT	Regulator Output Pin. It is recommended to use a 1 μ F ceramic capacitor to ensure stability. This ceramic capacitor should be placed as close as possible to OUT pin.

FUNCTIONAL BLOCK DIAGRAMS

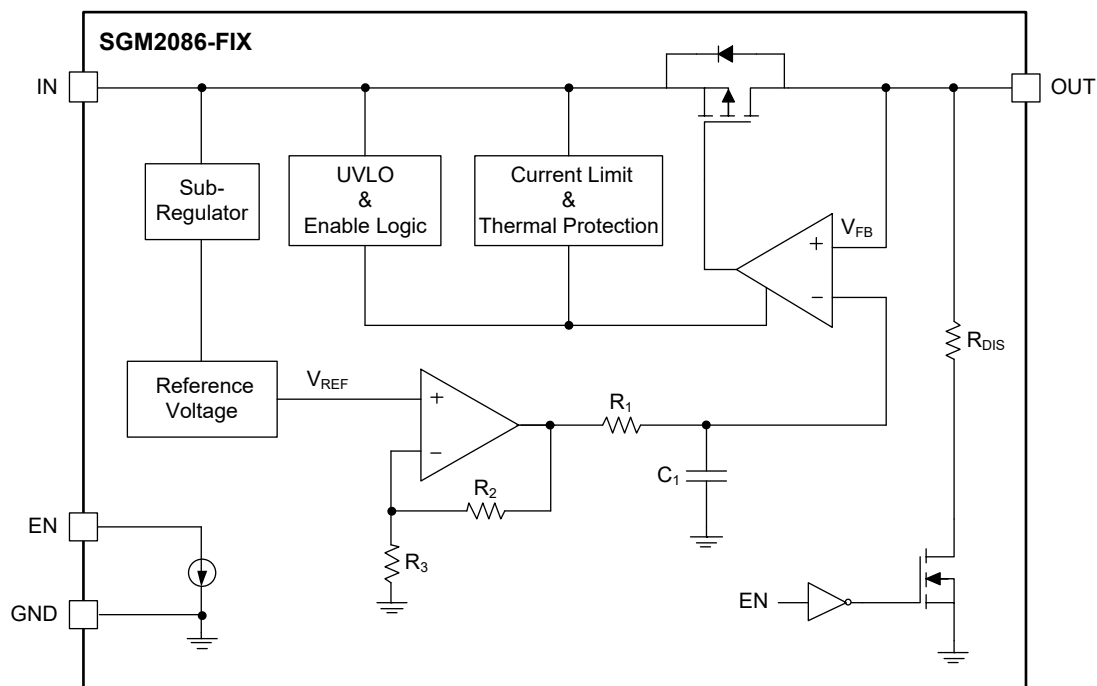


Figure 2. Fixed Output Regulator Block Diagram



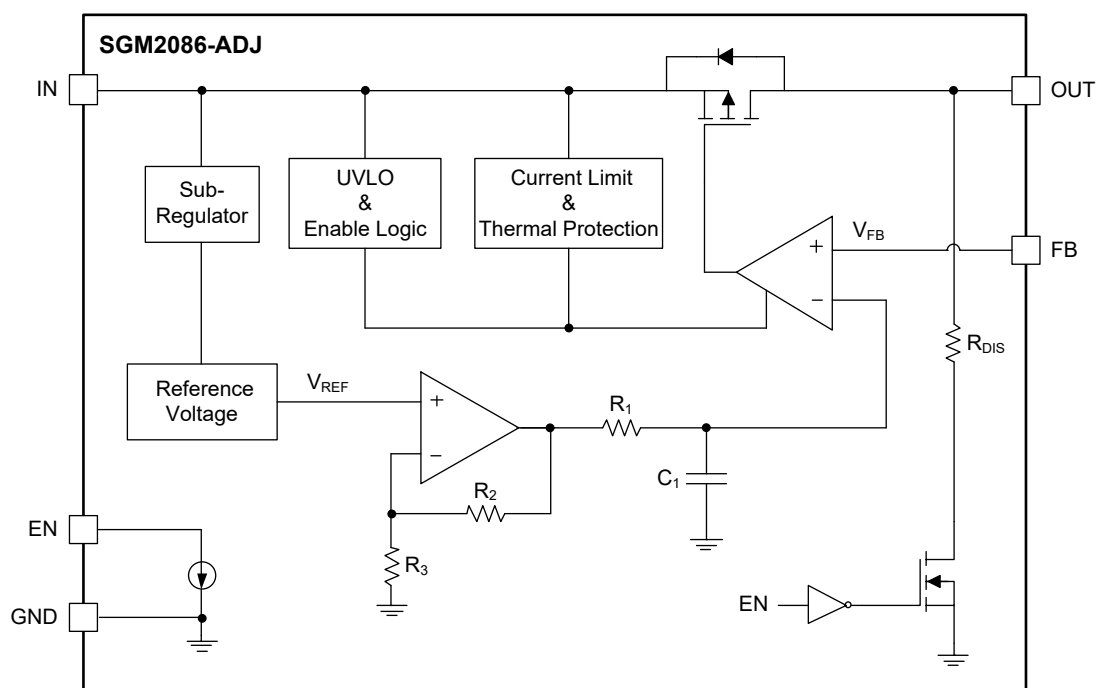




Figure 3. Adjustable Output Regulator Block Diagram

PACKAGE OUTLINE DIMENSIONS

SOT-23-5

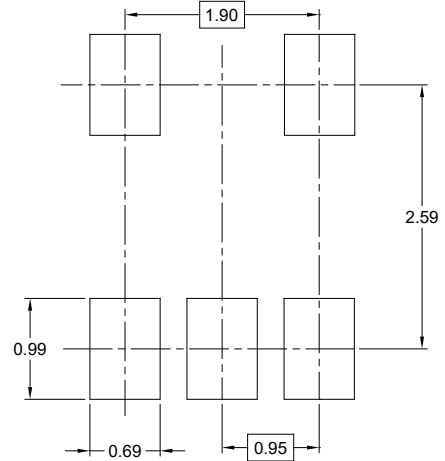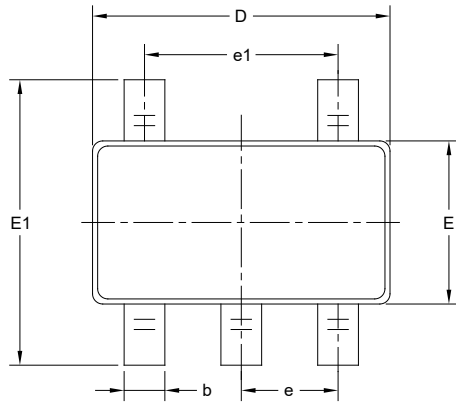

RECOMMENDED LAND PATTERN (Unit: mm)

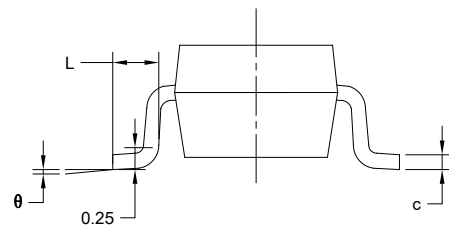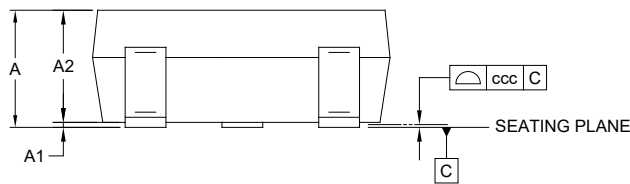


Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	-	-	1.450
A1	0.000	-	0.150
A2	0.900	-	1.300
b	0.300	-	0.500
c	0.080	-	0.220
D	2.750	-	3.050
E	1.450	-	1.750
E1	2.600	-	3.000
e	0.950 BSC		
e1	1.900 BSC		
L	0.300	-	0.600
θ	0°	-	8°
ccc	0.100		

NOTES:


1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-178.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

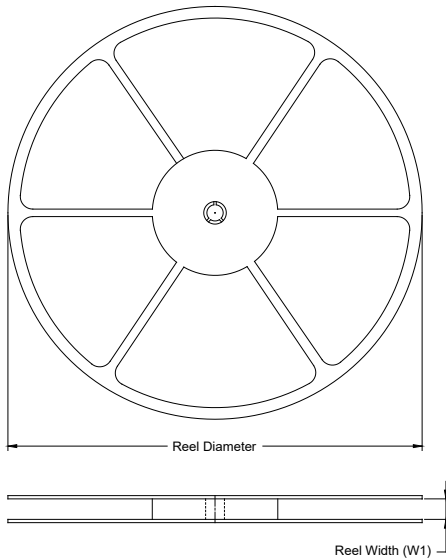

TAPE DIMENSIONS

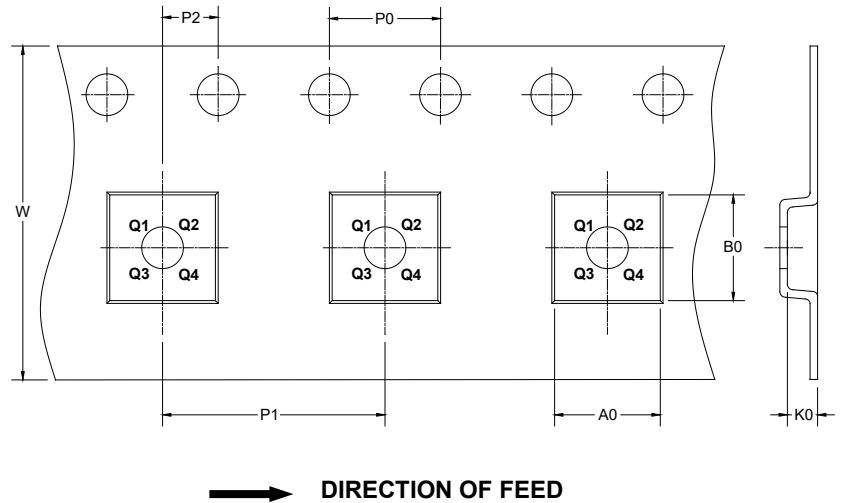

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23-5	7"	9.5	3.20	3.20	1.40	4.0	4.0	2.0	8.0	Q3

DD00001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

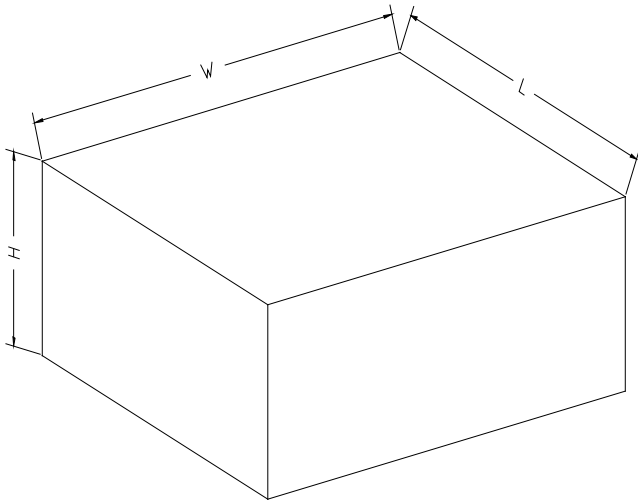

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002