

GENERAL DESCRIPTION

The SGM48761 is a versatile analog multiplexer (MUX) that can be configured as a 4:1 single-channel MUX. It operates from a single power supply ranging from 1.08V to 5.5V and all control inputs support 1.2V and 1.8V logic levels.

The SGM48761 incorporates low-power operation, making it ideal for power-constrained environments. Additionally, its fail-safe logic circuitry safeguards the device against electrical damage by enabling voltage application to logic control pins prior to power supply activation.

The SGM48761 is available in a Green MSOP-10 package. It operates -40 °C to +125 °C operating temperature range.

APPLICATIONS

- Industrial Equipment
- Medical Equipment
- Telecom Equipment
- Wireless Equipment
- Handheld Equipment

FEATURES

- **Wide Supply Range: 1.08V to 5.5V**
- **Low On-Resistance: 3.3Ω at V_{DD} = 5V**
- **Low Supply Current: 0.1μA (TYP) at V_{DD} = 5V**
- **Transition Time: 13ns at V_{DD} = 5V**
- **Rail-to-Rail Operation**
- **Bidirectional Signal Path**
- **1.2V, 1.8V Logic Compatible**
- **Low Supply Current at 1.2V Logic**
- **Fail-Safe Logic**
- **Break-Before-Make Switching**
- **-40°C to +125°C Operating Temperature Range**
- **Available in a Green MSOP-10 Package**

TYPICAL APPLICATION

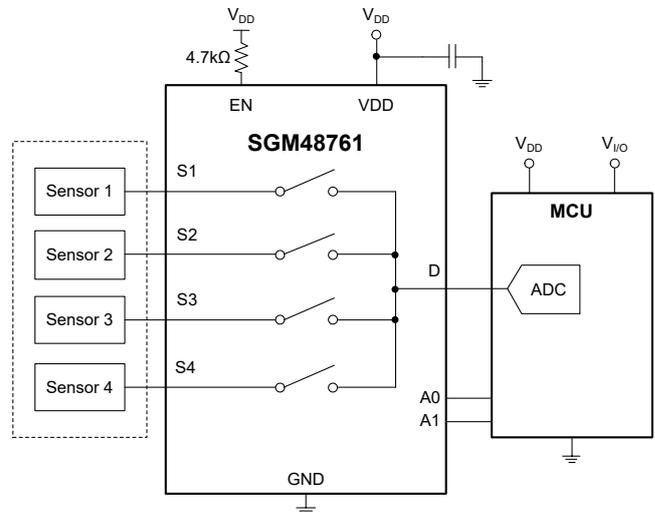


Figure 1. Typical Application Circuit

PACKAGE/ORDERING INFORMATION


MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM48761	MSOP-10	-40°C to +125°C	SGM48761XMS10G/TR	SGM1PF XMS10 XXXXX	Tape and Reel, 4000

MARKING INFORMATION

NOTE: XXXXX = Date Code, Trace Code and Vendor Code.

MSOP-10

XXXXX



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS ⁽¹⁾

Supply Voltage, V_{DD}	-0.5V to 6V
Logic Control Input Pin Voltage (EN, A0, A1), V_{SEL} or V_{EN}	-0.5V to 6V
Source or Drain Voltage (Sx, D), V_S or V_D	-0.5V to ($V_{DD} + 0.5V$)
Source or Drain Continuous Current (Sx, D), I_S or $I_{D(CONT)}$	-30mA to 30mA
Package Thermal Resistance	
MSOP-10, θ_{JA}	145.3°C/W
MSOP-10, θ_{JB}	93.1°C/W
MSOP-10, θ_{JC}	61.4°C/W
Junction Temperature.....	+150°C
Storage Temperature Range.....	-65°C to +150°C
Lead Temperature (Soldering, 10s).....	+260°C
ESD Susceptibility ^{(2) (3)}	
HBM.....	±8000V
CDM.....	±1000V

NOTES:

1. All voltages are with respect to ground, unless otherwise specified.
2. For human body model (HBM), all pins comply with ANSI/ESDA/JEDEC JS-001 specifications.
3. For charged device model (CDM), all pins comply with ANSI/ESDA/JEDEC JS-002 specifications.

RECOMMENDED OPERATING CONDITIONS

Supply Voltage, V_{DD}	1.08V to 5.5V
Logic Control Input Pin Voltage (EN, A0, A1), V_{SEL} or V_{EN}	0V to 5.5V
Source or Drain Voltage (Sx, D), V_S or V_D	0V to V_{DD}
Operating Temperature Range.....	-40°C to +125°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATION

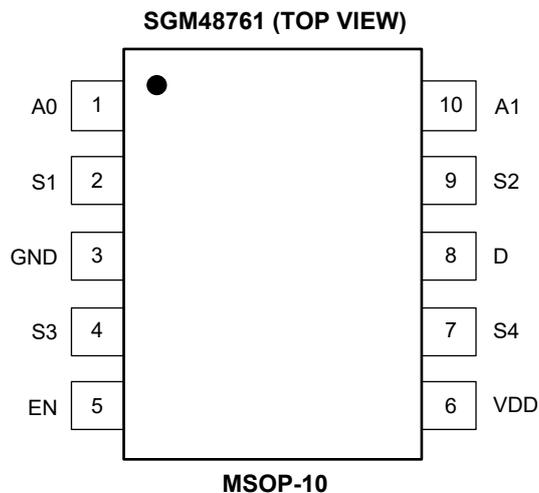

PIN DESCRIPTION

PIN	NAME	TYPE ⁽¹⁾	FUNCTION
1, 10	A0, A1	I	Select Control Pins. Sets state of switches as shown in Table 1.
2, 4, 7, 9	S1, S3, S4, S2	I/O	Source Pins. Signal input or output paths.
3	GND	P	Ground Pin.
5	EN	I	Enable Control Input Pin (Active High). When EN is set to low, all switches are deactivated.
6	V _{DD}	P	Positive Power Supply.
8	D	I/O	Drain Pin. Signal input or output path.

NOTE:

1. I = input, O = output, I/O = input and output, P = power.

FUNCTIONAL BLOCK DIAGRAM

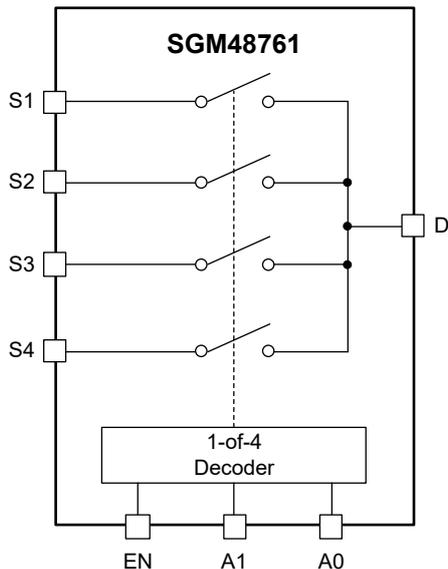


Figure 2. Block Diagram

FUNCTION TABLE


Table 1. Truth Table

EN	A1	A0	Selected Channel Connected to Drain (D) Pin
0	X ⁽¹⁾	X ⁽¹⁾	All channels are off
1	0	0	D = Channel S1
1	0	1	D = Channel S2
1	1	0	D = Channel S3
1	1	1	D = Channel S4


NOTE: 1. X: don't care.

PACKAGE OUTLINE DIMENSIONS

MSOP-10

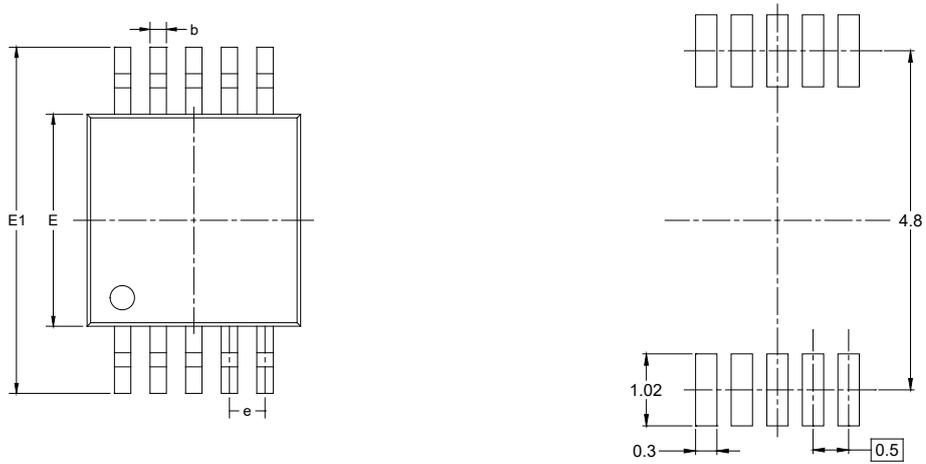

RECOMMENDED LAND PATTERN (Unit: mm)

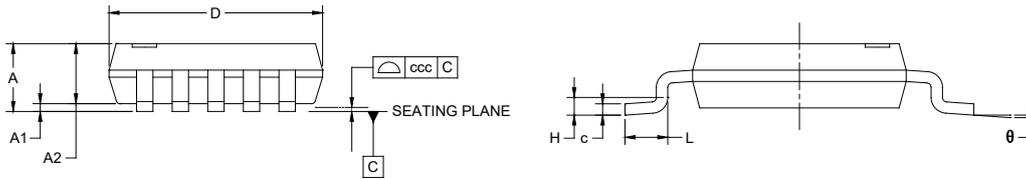

Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	-	-	1.100
A1	0.000	-	0.150
A2	0.750	-	0.950
b	0.170	-	0.330
c	0.080	-	0.230
D	2.900	-	3.100
E	2.900	-	3.100
E1	4.750	-	5.050
e	0.500 BSC		
H	0.250 TYP		
L	0.400	-	0.800
θ	0°	-	8°
ccc	0.100		


NOTES:

1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-187.


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

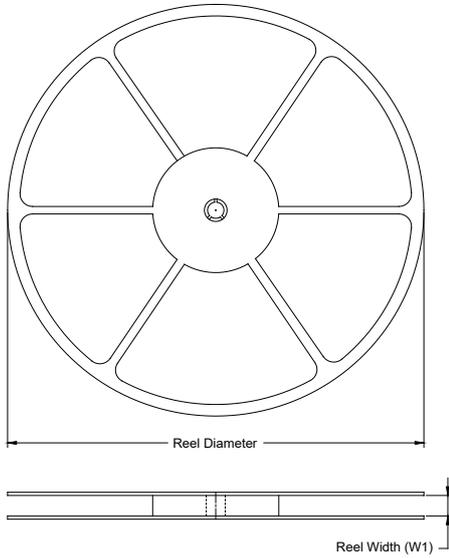

TAPE DIMENSIONS

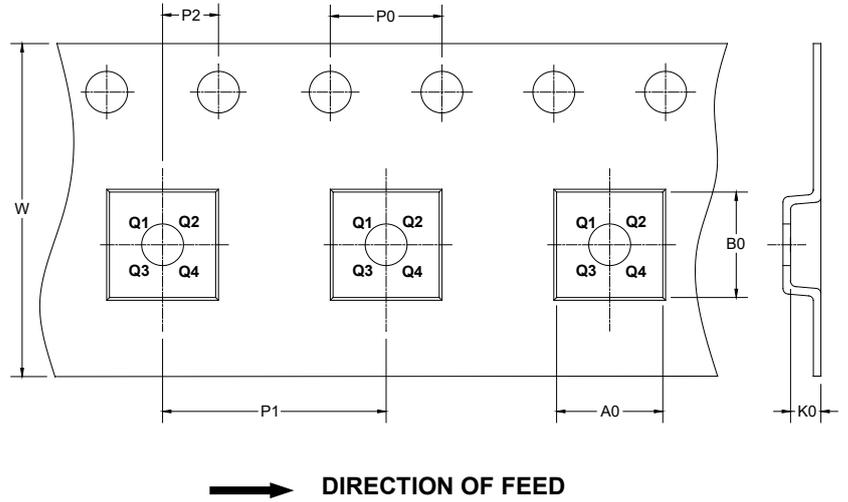

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
MSOP-10	13"	12.4	5.20	3.30	1.50	4.0	8.0	2.0	12.0	Q1

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

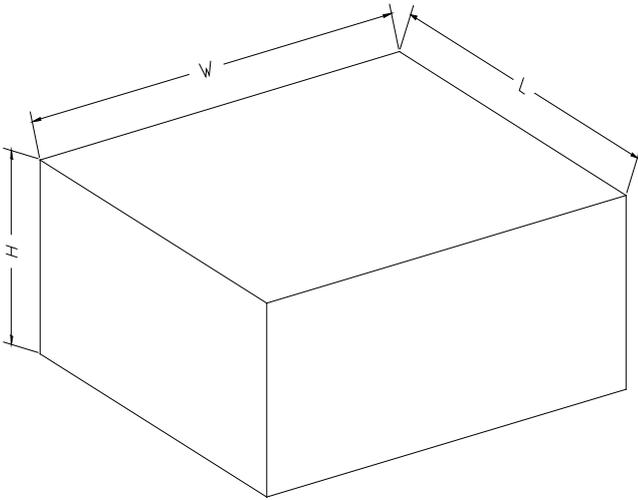

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

DD0002